


	<h1>TS803R</h1> <h2>Microprocessor Reset Circuit</h2>																
 <p><b>SOT-23</b></p>	<p>Pin assignment <b>TS803R</b></p> <ol style="list-style-type: none"> <li>1. <u>RESET</u></li> <li>2. Gnd</li> <li>3. Vcc</li> </ol> <p><b>Open Drain Threshold Voltage Option 2.7V, 2.93V, 4.2V</b></p>																
<h3>General Description</h3> <p>The TS803R are microprocessor (<math>\mu</math>P) supervisory circuit used to monitor the power supplies in <math>\mu</math>P and digital systems. They provide excellent circuit reliability and low cost by eliminating external components and adjustments when used with +5V, +3.3V, +3.0V powered circuits. These circuits perform a single function: they assert a reset signal whenever the VCC supply voltage declines below a preset threshold, keeping it asserted for at least 140ms after VCC has risen above the reset threshold. Reset thresholds suitable for operation with a variety of supply voltages are available. The TS803R are open –drain outputs. The TS803R have an active low <u>RESET</u> output, while the TS803R has an active high RESET output. The reset comparator is designed to ignore fast transients on VCC, and the output guaranteed to be in the correct logic state for VCC down to 1V. Low supply current makes the TS803R ideal for use in portable equipment. The TS803R is available in a 3-pin SOT-23 package.</p>																	
<h3>Features</h3> <ul style="list-style-type: none"> <li>✧ Precision monitoring of +3V, +3.3V and +5V power supply voltage</li> <li>✧ Fully specified over temperature</li> <li>✧ Available in three output configurations</li> <li>✧ Open – Drain RESET low output</li> <li>✧ 3uA supply current</li> <li>✧ Guaranteed reset valid to Vcc = +1V</li> <li>✧ Power supply transient immunity</li> <li>✧ No external components</li> </ul>	<h3>Ordering Information</h3> <table border="1" data-bbox="778 1120 1433 1332"> <thead> <tr> <th>Part No.</th> <th>Enable Function</th> <th>Threshold Voltage</th> <th>Package</th> </tr> </thead> <tbody> <tr> <td>TS803RCX <u>B</u></td> <td>Active-Low</td> <td>4.2V</td> <td rowspan="3">SOT-23</td> </tr> <tr> <td>TS803RCX <u>E</u></td> <td>Active-Low</td> <td>2.93V</td> </tr> <tr> <td>TS803RCX <u>F</u></td> <td>Active-Low</td> <td>2.7V</td> </tr> </tbody> </table> <p>Note: <u>x</u> is the threshold voltage type, option as  <u>B</u>: 4.20V  <u>E</u>: 2.93V  <u>F</u>: 2.70V</p>			Part No.	Enable Function	Threshold Voltage	Package	TS803RCX <u>B</u>	Active-Low	4.2V	SOT-23	TS803RCX <u>E</u>	Active-Low	2.93V	TS803RCX <u>F</u>	Active-Low	2.7V
Part No.	Enable Function	Threshold Voltage	Package														
TS803RCX <u>B</u>	Active-Low	4.2V	SOT-23														
TS803RCX <u>E</u>	Active-Low	2.93V															
TS803RCX <u>F</u>	Active-Low	2.7V															
<h3>Applications</h3> <ul style="list-style-type: none"> <li>✧ Computers</li> <li>✧ Controllers</li> <li>✧ Intelligent instruments</li> <li>✧ Critical uP and uC power monitoring</li> <li>✧ Portable / Battery powered equipment</li> <li>✧ Automotive</li> </ul>	<h3>Pin Descriptions</h3> <table border="1" data-bbox="778 1568 1433 1792"> <thead> <tr> <th>Pin No.</th> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><u>RESET</u></td> <td>Reset output pin <b>(Active- Low)</b></td> </tr> <tr> <td><u>2</u></td> <td>Gnd</td> <td>Ground</td> </tr> <tr> <td>3</td> <td>Vcc</td> <td>Operating voltage input</td> </tr> </tbody> </table>			Pin No.	Name	Description	1	<u>RESET</u>	Reset output pin <b>(Active- Low)</b>	<u>2</u>	Gnd	Ground	3	Vcc	Operating voltage input		
Pin No.	Name	Description															
1	<u>RESET</u>	Reset output pin <b>(Active- Low)</b>															
<u>2</u>	Gnd	Ground															
3	Vcc	Operating voltage input															
<h3>Absolute Maximum Rating</h3>																	
Supply Voltage	$V_{CC}$	7	V														
<u>RESET</u> & ( <u>RESET</u> ) push-pull	$V_{RESET}$	- 0.3 ~ ( $V_{CC} + 0.3$ )	V														
Input Current, Vcc	$I_{CC}$	20	mA														
Output Current, <u>RESET</u>	$I_O$	20	mA														
Rate of Rise, Vcc	$V_R$	100	V/uS														





Recommended Operating Conditions			
Supply Voltage	$V_{CC}$	<5	V
Operating Ambient Temperature Range	$T_{a(op)}$	-40 ~ +105	°C
Operating Junction Temperature Range	$T_{j(op)}$	-40 ~ +125	°C
Storage Temperature Range	$T_{STG}$	-65 ~ +150	°C
Thermal Resistance	$\Theta_{jc}$	325	°C/W
Power Dissipation	$P_D$	350	mW
Lead Soldering Temperature (260 °C)	$T_{LEAD}$	10	S

### Electrical Characteristics


$T_a = 25\text{ }^\circ\text{C}$ , unless otherwise specified.

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Input Supply Voltage	$T_a = 0\text{ }^\circ\text{C} \sim +70\text{ }^\circ\text{C}$	$V_{CC}$	1.0	--	5.5	V
Supply Current	$V_{CC} \leq V_{th} * 1.1$	$I_{CC}$	--	--	3	uA
	$V_{CC} \leq V_{th} * 1.1$ , $T_a = \text{full range}$		--	--	5	
Reset Threshold	TS803RCXB	$V_{TH}$	0.985  $V_{TH}$	4.20	1.015  $V_{TH}$	V
	TS803RCXE			2.93		
	TS803RCXF			2.70		
Reset Threshold (Full temperature range)	TS803RCXB	$V_{TH}$	0.97  $V_{TH}$	4.20	1.03  $V_{TH}$	V
	TS803RCXE			2.93		
	TS803RCXF			2.70		
Reset Threshold Temperature Coefficient		$V_{TH}$	--	30	--	ppm/ °C
$V_{CC}$ to Reset Delay	$V_{CC} = V_{TH}$ to ( $V_{TH} - 100\text{mV}$ )	$T_{DELAY}$	--	40	--	uS
Reset Active Timeout Period	$T_a = 0\text{ }^\circ\text{C} \sim +70\text{ }^\circ\text{C}$		0.5	1.5	5	mS
<u>RESET</u> Output Voltage Low	$V_{CC} < V_{TH(MIN)}$ , $I_{SINK} = 1.2\text{mA}$ ,	$V_{OL}$	--	--	0.5	V
<u>RESET</u> Output Voltage High	$V_{CC} > V_{TH(MAX)}$ , $I_{SOURCE} = 500\text{uA}$ $V_{CC} > 1.8\text{V}$	$V_{OH}$	0.8 $V_{CC}$	--	--	V
	$V_{CC} > V_{TH(MAX)}$ , $I_{SOURCE} = 150\text{uA}$ , $1.8\text{V} \geq V_{CC} > 1\text{V}$					

Note 1 : The data based on  $V_{TH} = 2.7\text{V}$  part type.




## Function Block

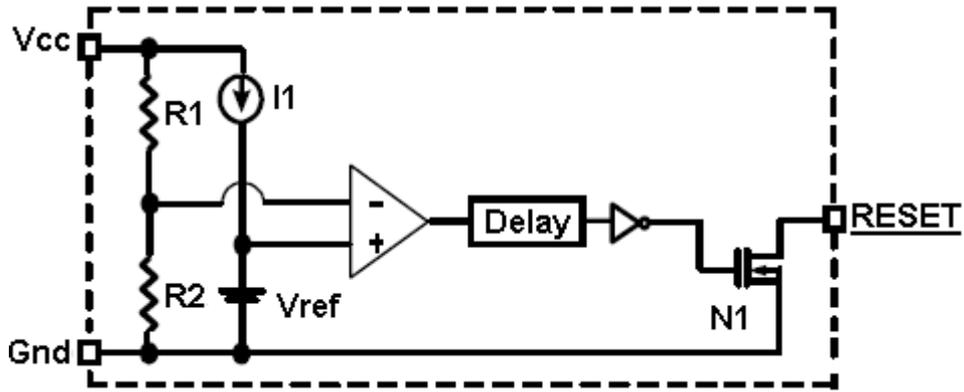


## Function Description



### Applications Circuit

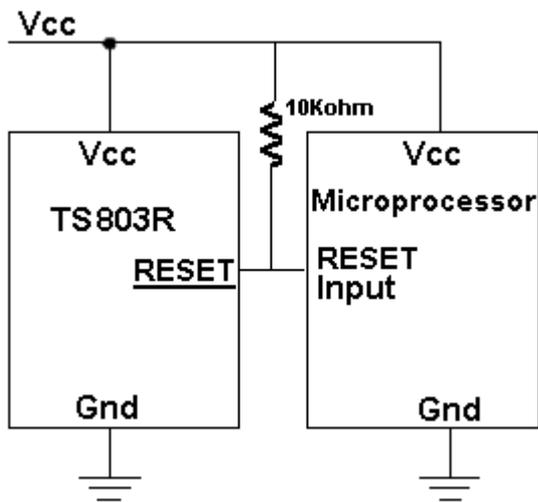







### Timing Diagram

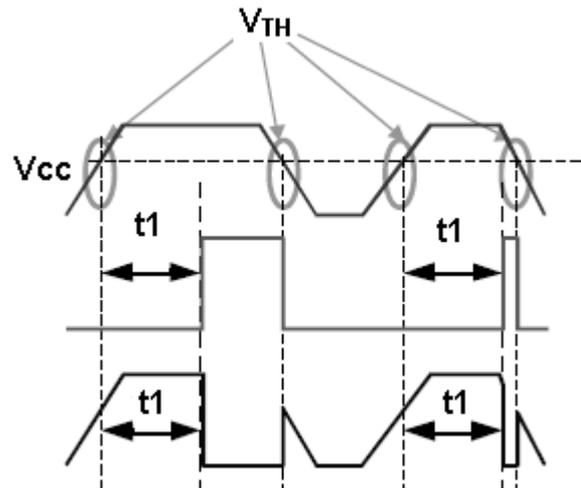


## Electrical Characteristics Curve

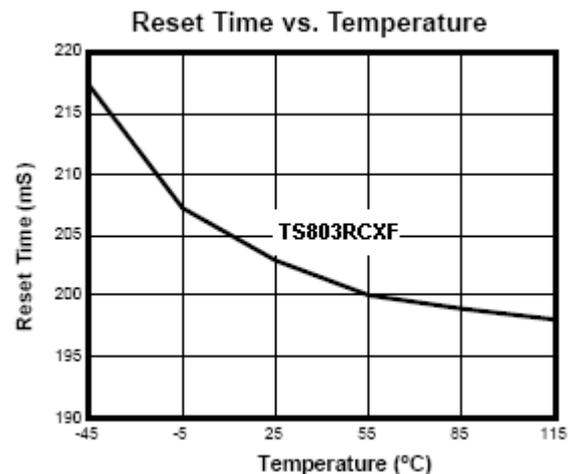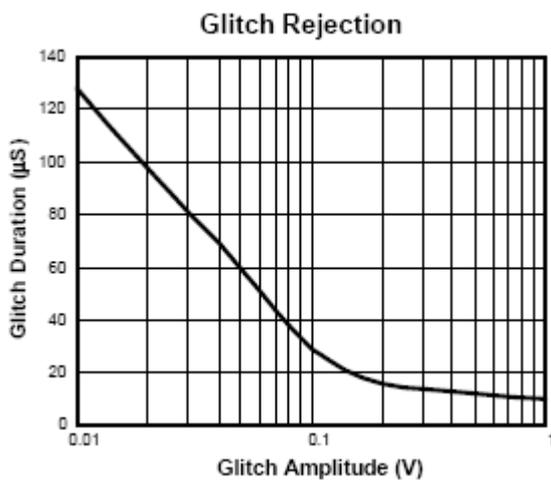

## Electrical Characteristics Curve

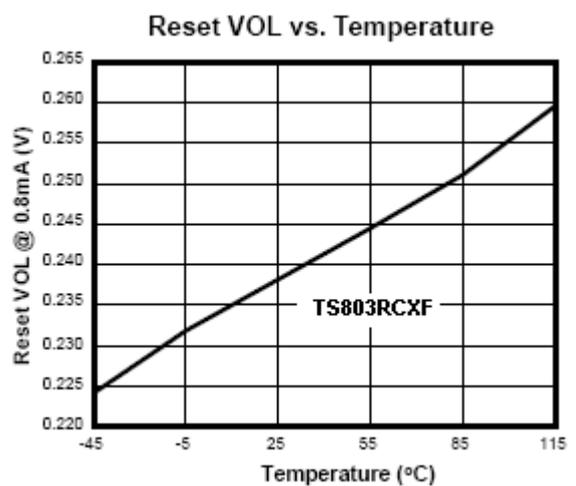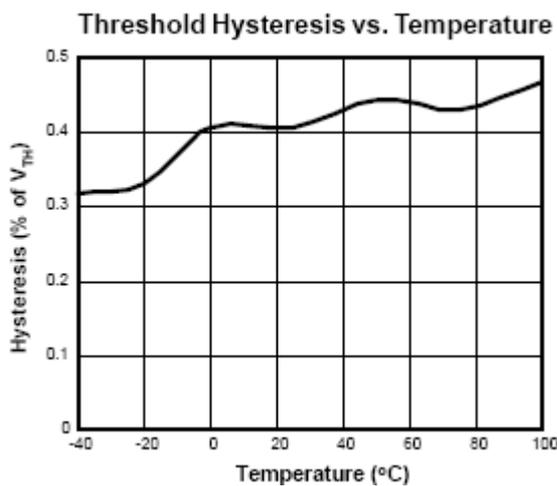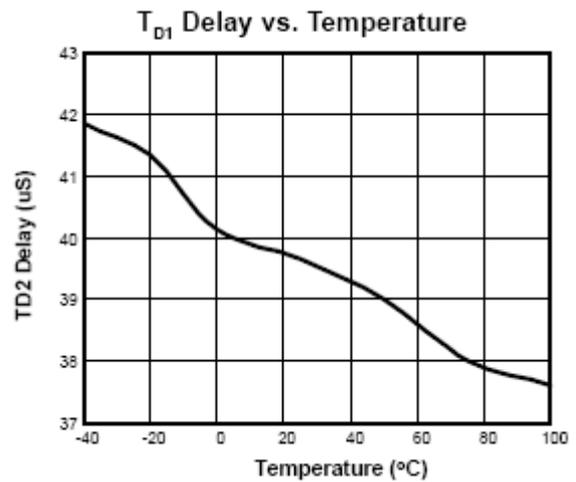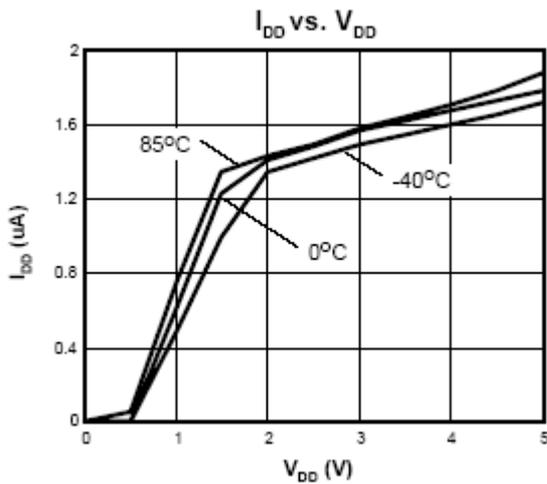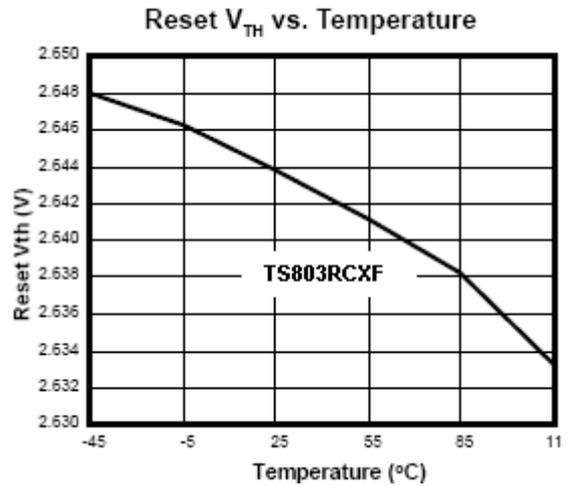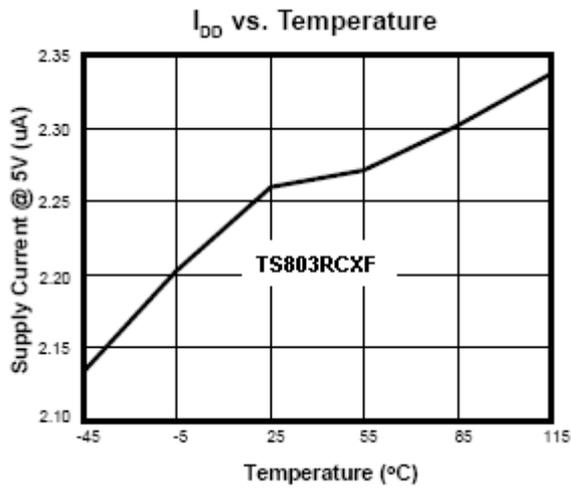

### SOT-23 Mechanical Drawing

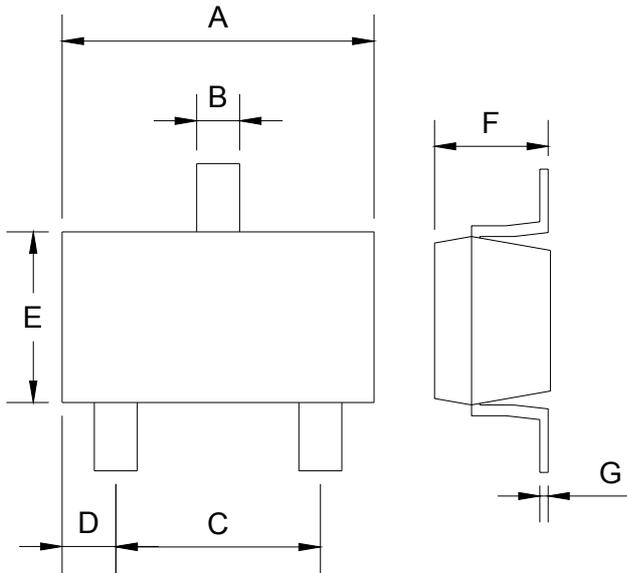

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.88	2.91	0.113	0.115
B	0.39	0.42	0.015	0.017
C	1.78	2.03	0.070	0.080
D	0.51	0.61	0.020	0.024
E	1.59	1.66	0.063	0.065
F	1.04	1.08	0.041	0.043
G	0.07	0.09	0.003	0.004