

REV. Status

PRELIMINARY
10/23/00 LL
PRELIMINARY 1
SIDE VIEW
REDRAWN.
10/27/00 LL
PRELIMINARY 2
CHANGED
HEIGHT
12/20/00 LL

查询TTC-8100供应商


捷多邦, 专业PCB打样工厂, 24小时加急出货









10/100 Base-T LAN Magnetic Module Single Port, 16 pin SOIC

MODEL NUMBER
TTC-8100

- Complies with IEEE 802.3 Standard
- Surface Mount Device withstands IR reflow profile process
- Operating temperature: 0°C to 70°C
- Enhanced Common Mode Attenuation



Electrical Specification @ 25°C							
Insertion Loss (dB Max)	Return Loss (dB Min)			CMRR (dB Min)	Crosstalk (dB Min)	OCL (μH Min)	Hipot (Vrms)
0.1-100 MHz	0.1-30 MHz	60 MHz	80 MHz	0.1-100 MHz	0.1-100 MHz	8mA DC Bias	1 minute
-1	-18	-14	-12	-35	-35	350	1500

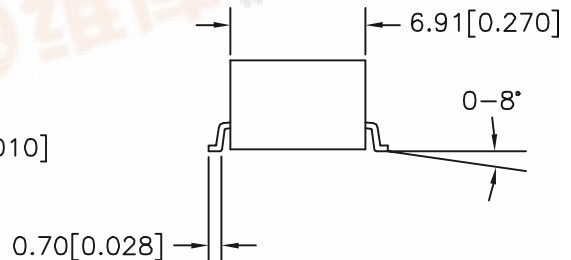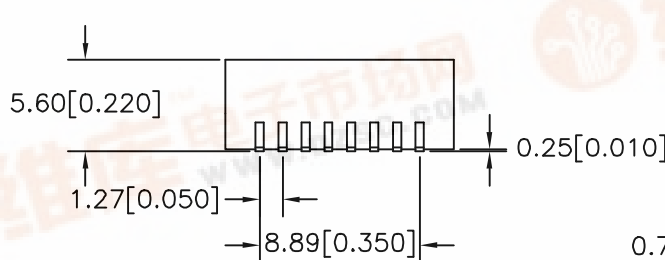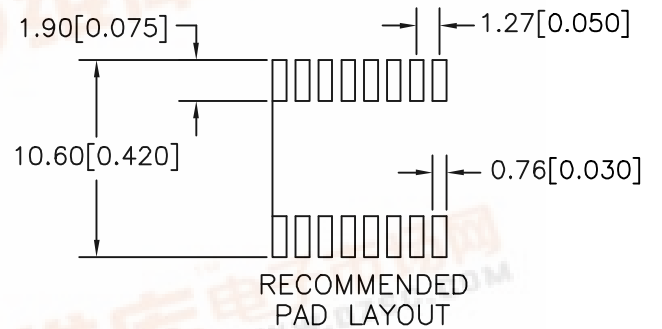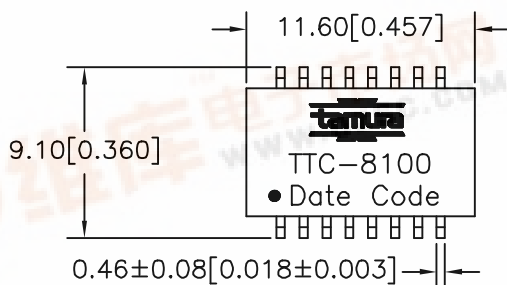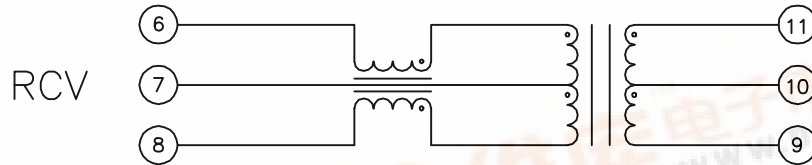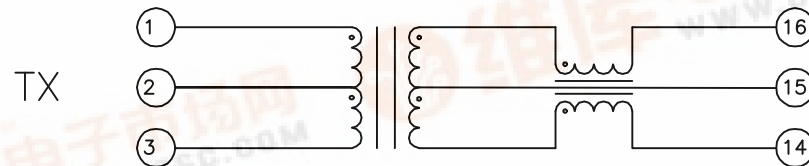

PREPARED BY:

D. Rund

ENGINEER:

NOTE: Unless otherwise specified, all dimensions are mm[in] with tolerance of ±0.25[0.010]

DWG CONTROL NO. P-A1-12622
ACAD/TTC/A1126221.DWG

REV PR2

10/100 Base-X LAN Magnetic Module
Single Port, 16 pin SOIC

TTC-8100

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: none SH: 1 OF 1

APPROVED:

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA