



Ultrafast Recovery Modules

UFT70SM, 71SM & 72SM

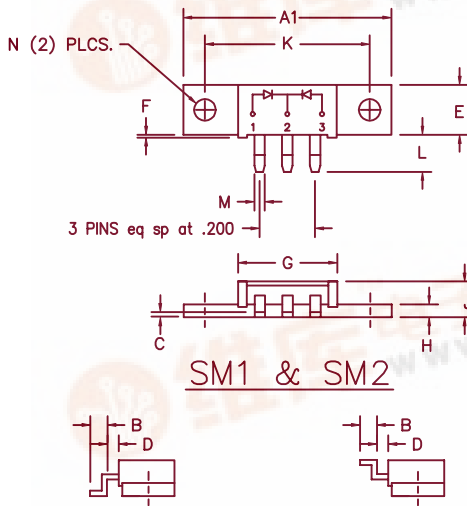

TYP. PIN CONFIGURATION
FOR SM1, SM3, & SM5

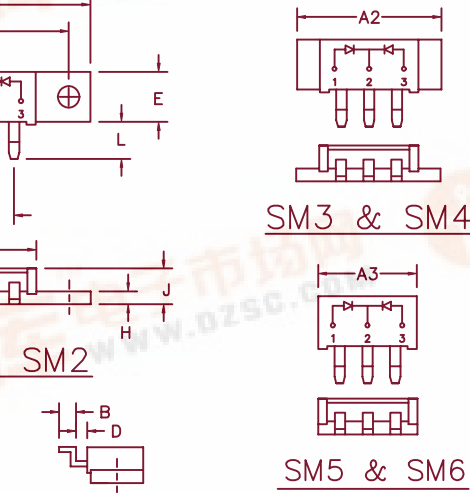

TYP. PIN CONFIGURATION
FOR SM2, SM4, & SM6

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A1	1.490	1.510	37.85	38.35	
A2	1.020	1.040	26.12	26.42	
A3	.695	.715	17.65	18.16	
B	.110	.120	2.79	3.04	
C	.027	.037	0.69	0.94	
D	.100	.110	2.54	2.79	
E	.350	.370	8.89	9.40	
F	.015	.025	0.38	0.64	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	1.180	1.195	29.97	30.35	
L	.230	.250	5.84	6.35	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT7010SM ①②	100V	100V
UFT7015SM — —	150V	150V
UFT7020SM — —	200V	200V
UFT7120SM ①②	200V	200V
UFT7130SM — —	300V	300V
UFT7140SM — —	400V	400V
UFT7250SM ①②	500V	500V
UFT7260SM — —	600V	600V
UFT7270SM — —	700V	700V
UFT7280SM — —	800V	800V

Note: ① Specify (1–6) to identify package desired
② Specify C–Common Cathode, A–Common Anode, D–Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 100 to 800 Volts
- Unique surface mount package
- 2 X 35 Amp current rating

Electrical Characteristics						
	UFT70SM	UFT71SM	UFT72SM			
Average forward current per pkg	$I_F(AV)$ 70A	70A	70A	Square Wave		
Average forward current per leg	$I_F(AV)$ 35A	35A	35A	Square Wave		
Case Temperature	T_C 148°C	142°C	138°C	$R_{\theta JC} = 1.0^\circ C/W$		
Maximum surge current per leg	I_{FSM} 700A	600A	500A	8.3ms, half sine, $T_J = 175^\circ C$		
Max peak forward voltage per leg	V_{FM} .95V	1.20V	1.35V	$I_{FM} = 35A; T_J = 25^\circ C^*$		
Max reverse recovery time per leg	t_{rr} 50ns	60ns	75ns	1/2A, 1A, 1/4A, $T_J = 25^\circ C$		
Max peak reverse current per leg	I_{RM} —	3.0mA	—	$V_{RRM}, T_J = 125^\circ C$		
Max peak reverse current per leg	I_{RM} —	25μA	—	$V_{RRM}, T_J = 25^\circ C$		
Typical Junction capacitance	C_J 300pF	120pF	115pF	$V_R = 10V, T_J = 25^\circ C$		

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics			
Storage temp range	T_{STG}	–55°C to 175°C	
Operating junction temp range	T_J	–55°C to 175°C	
Max thermal resistance per leg	$R_{\theta JC}$	1.0°C/W Junction to case	
Max thermal resistance per pkg	$R_{\theta JC}$	0.5°C/W Junction to case	
Typical thermal resistance (greased)	$R_{\theta CS}$	0.3°C/W Case to sink	
Mounting Base Torque		10 inch pounds maximum	
Weight	SM1–2	0.3 ounce (8.4 grams) typical	
	SM3–4	0.24 ounce (6.7 grams) typical	
	SM5–6	0.18 ounce (5.2 grams) typical	



UFT70SM1 — SM6

Figure 1
Typical Forward Characteristics — Per Leg

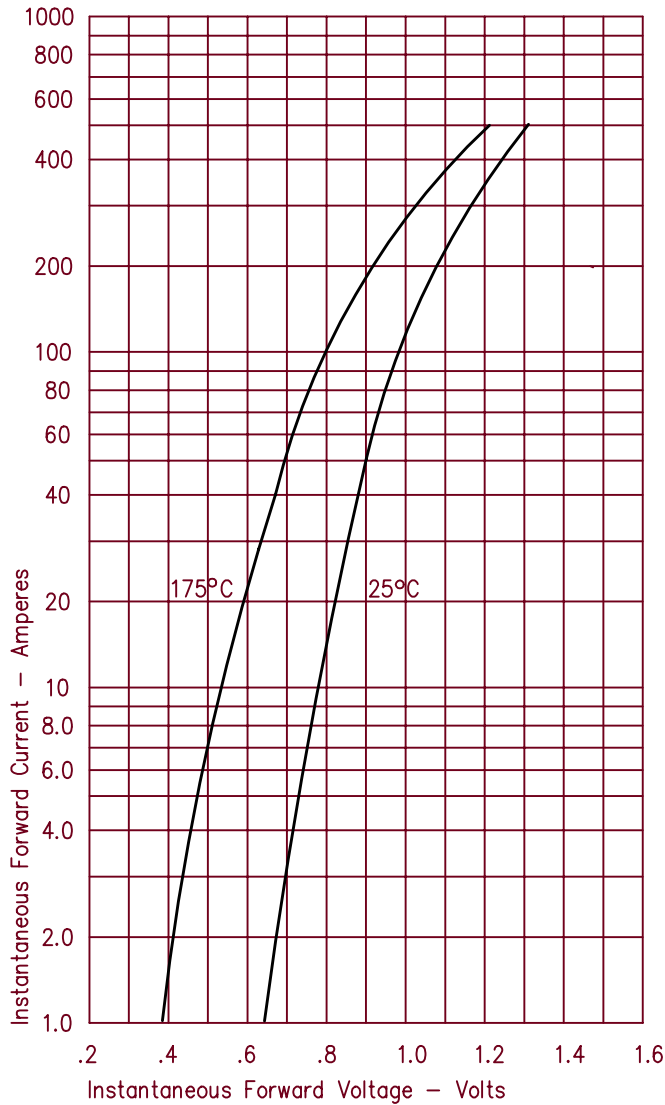


Figure 3
Typical Junction Capacitance — Per Leg

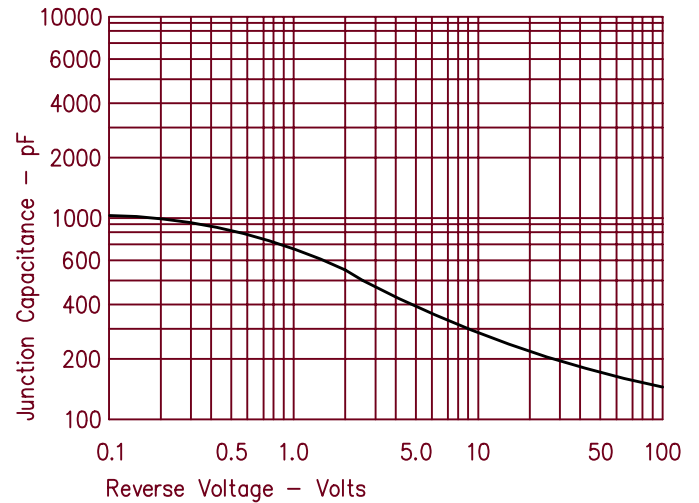


Figure 4
Forward Current Derating — Per Leg

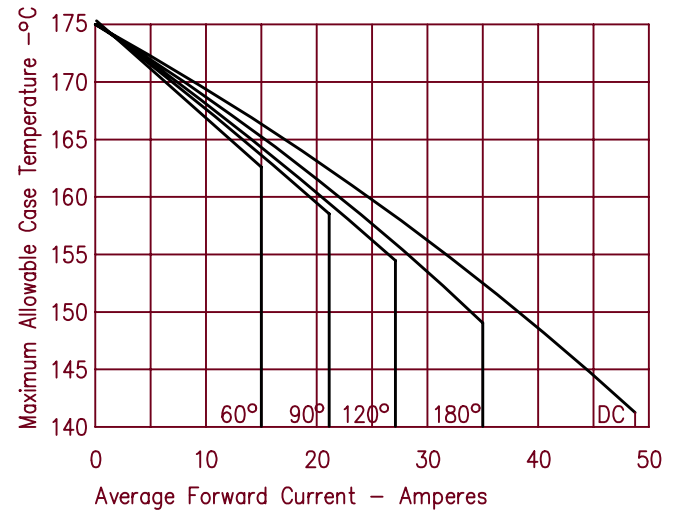


Figure 2
Typical Reverse Characteristics — Per Leg


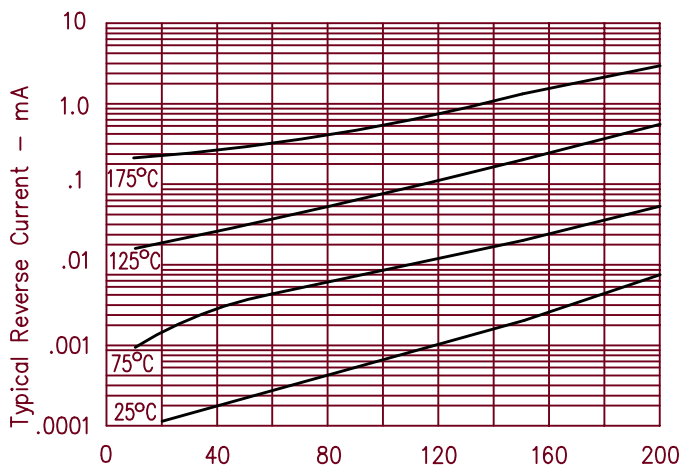


Figure 5
Maximum Forward Power Dissipation — Per Leg

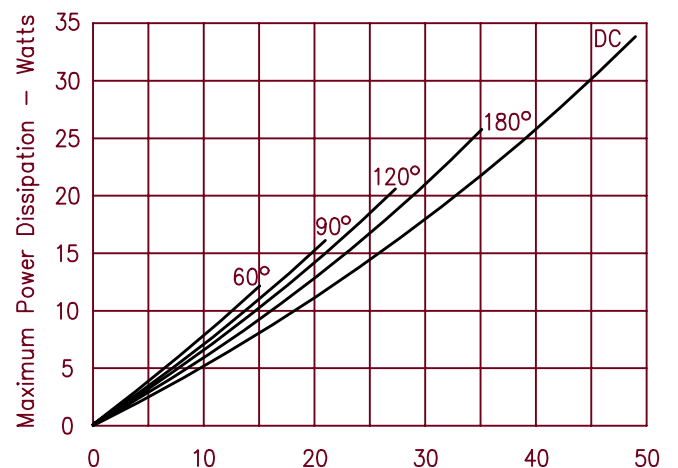

UFT71SM1 — SM6

Figure 1
Typical Forward Characteristics — Per Leg

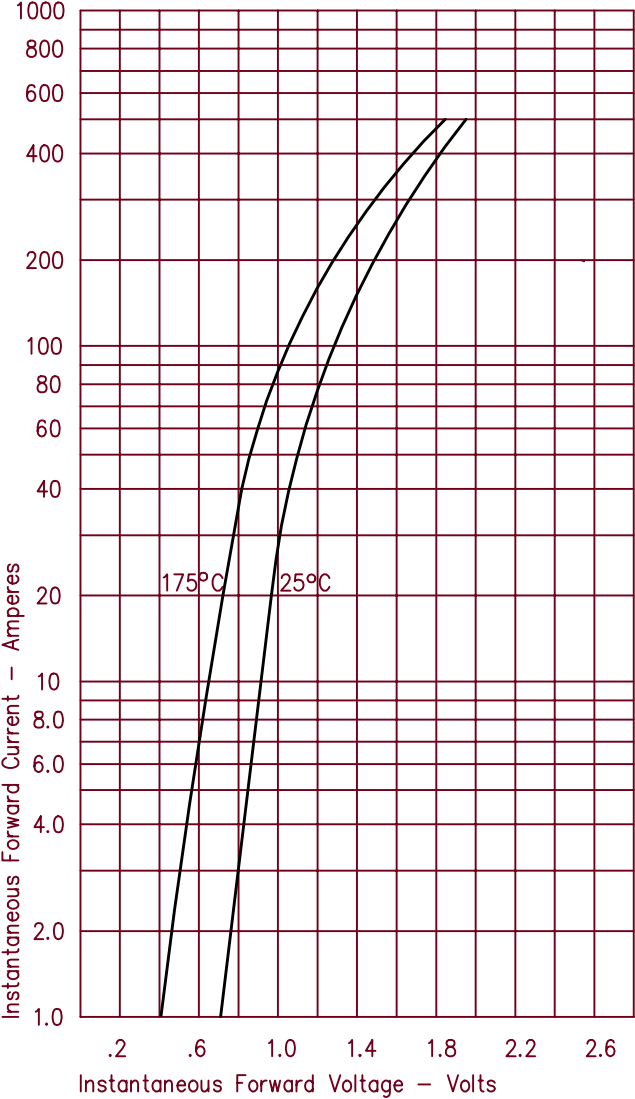


Figure 3
Typical Junction Capacitance — Per Leg

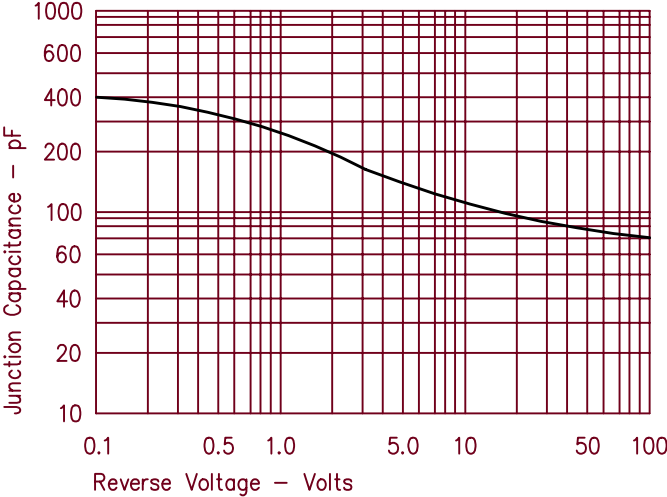


Figure 4
Forward Current Derating — Per Leg

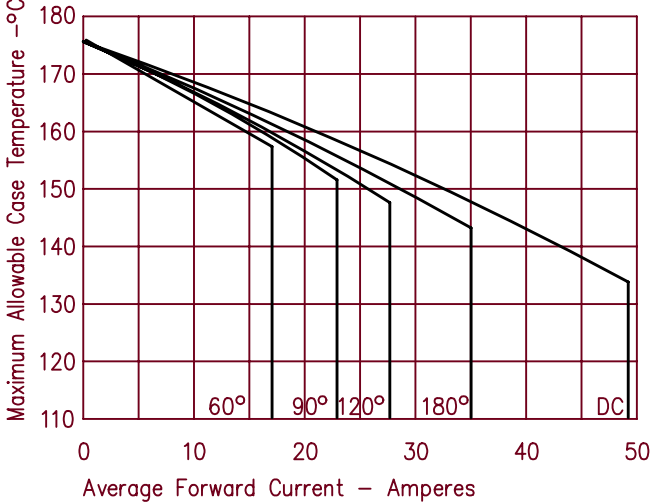


Figure 2
Typical Reverse Characteristics — Per Leg


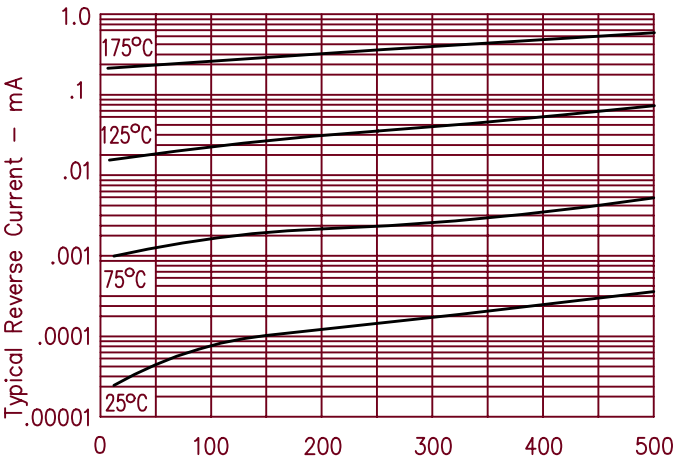


Figure 5
Maximum Forward Power Dissipation — Per Leg

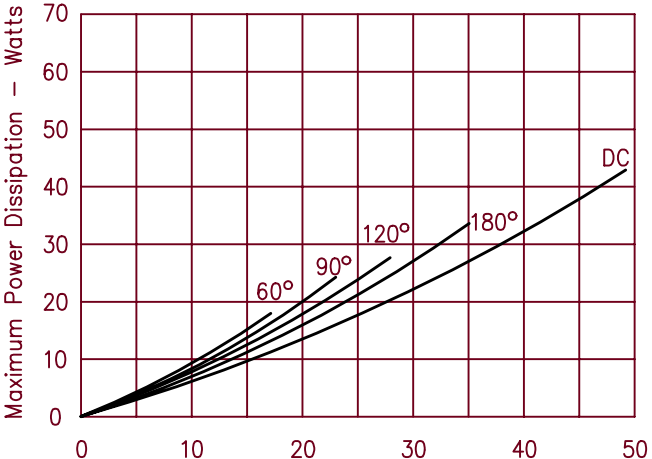

UFT72SM1 — SM6

Figure 1
Typical Forward Characteristics — Per Leg

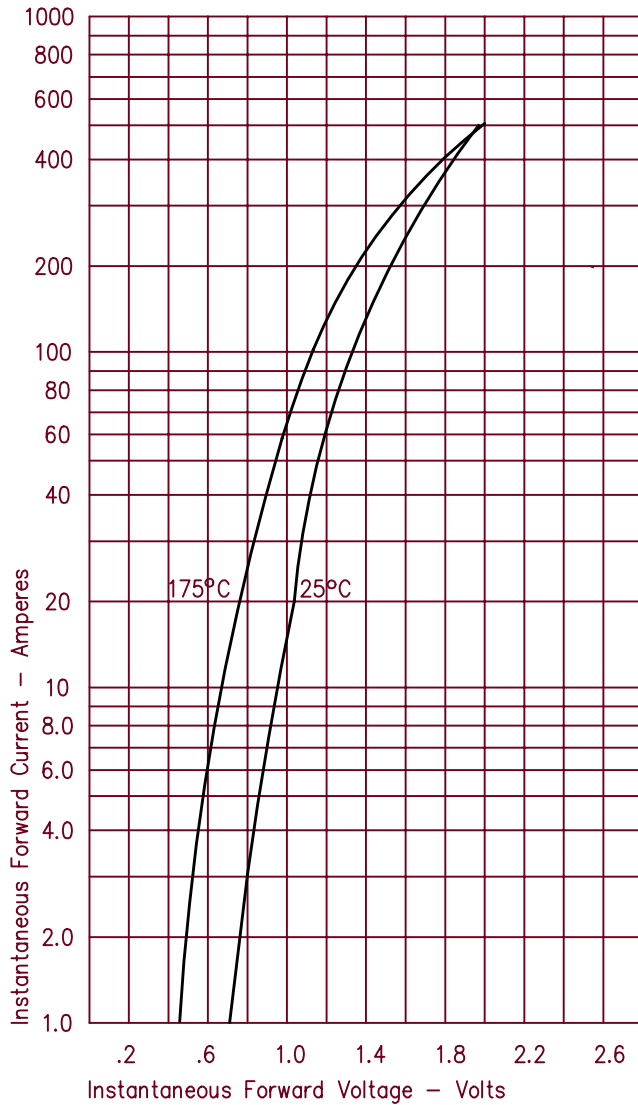


Figure 3
Typical Junction Capacitance — Per Leg

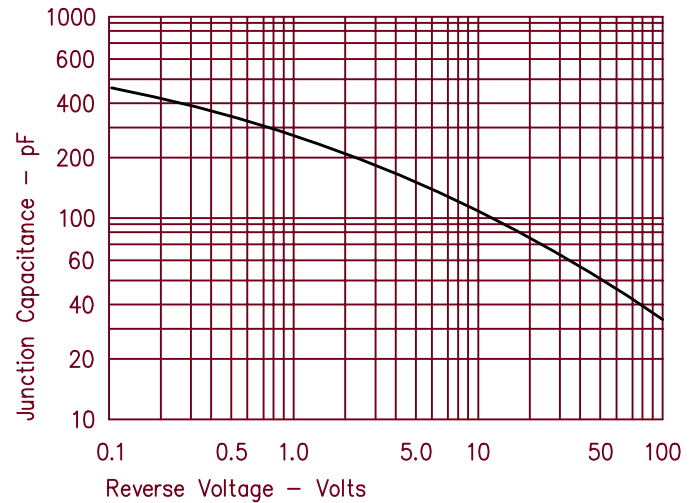


Figure 4
Forward Current Derating — Per Leg

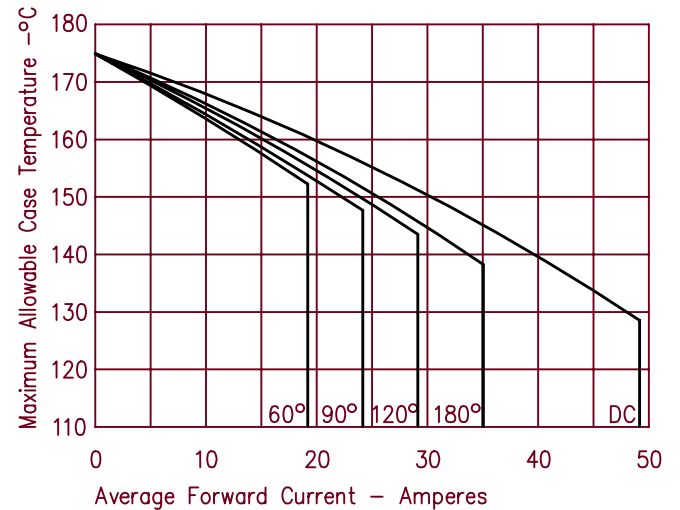


Figure 2
Typical Reverse Characteristics — Per Leg

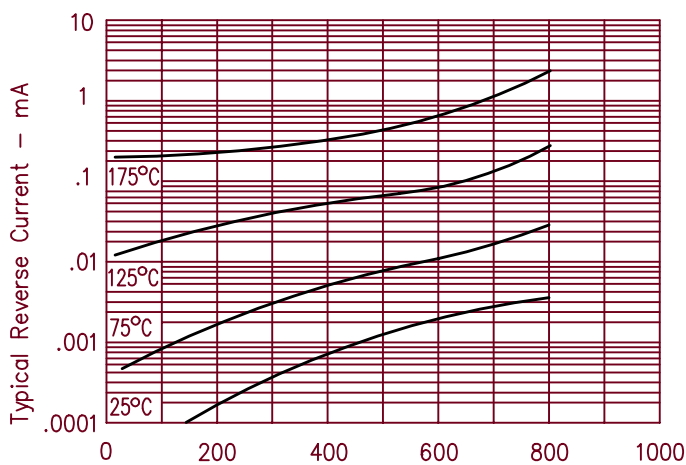


Figure 5
Maximum Forward Power Dissipation — Per Leg

