

ULTRA-CINCH™ Hook & Loop Ties

Innovative Solution for Network Cabling

PANDUIT® ULTRA-CINCH™ Hook & Loop Ties securely fasten a wide range of copper and fiber cable bundles to help maintain network data integrity. *ULTRA-CINCH™* Ties are available in a variety of sizes, styles, and colors, are easy to adjust, release, and re-use, providing lower total cost of ownership. *ULTRA-CINCH™* Hook & Loop Ties are part of the complete offering of *PANDUIT* premium Hook & Loop cable ties.




Key Features

Benefits

<i>Exclusive material has hooks and loops on same side</i>	Provides the flexibility to secure a greater range of bundle diameters, including smaller bundles
<i>Low profile, contoured cinch ring</i>	Reduce overall bundle size, minimizing interference with adjacent cables and consumption of cable tray capacity
<i>Premium, soft hook and loop material</i>	Maintains network data integrity by protecting against over-tensioning, unraveling, and delamination
<i>Releasable and reusable hundreds of times</i>	Provides flexibility, convenience, and low total cost of ownership for applications requiring frequent moves, adds, and changes
<i>Available in eight colors</i>	Offers color options to satisfy your network color-coding and troubleshooting requirements
<i>Brass grommet (on UGCTC and UGCTE styles)</i>	Assures reliable installations with a high strength metal grommet that resists pull-out
<i>Three styles</i>	Provides a single source solution to satisfy your entire cinch tie requirements • Cinch Ties (UCT) • Cinch Ties – Center Mount Grommet (UGCTC) • Cinch Ties – End Mount Grommet (UGCTE)
<i>Tapered tip</i>	Tip threads easily speeding installation time


PANDUIT actively participates with BICSI, UL, EIA/TIA, and NFPA in the creation of standards that ensure the best network solution.
PANDUIT is ISO9001 and ISO14001 certified.

ULTRA-CINCH™ Hook & Loop Ties™



UGCTC

Bundle is centered over mounting point

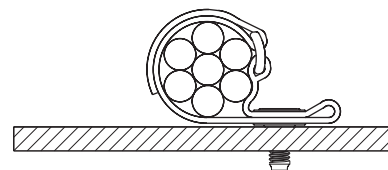

UGCTE

Bundle is offset from mounting point

PANDUIT recommends flat-head screws for use in grommet applications (Screw part number information below).

Order Information

Part Number	Length In. (mm)	Width In. (mm)	Thickness In. (mm)	Head Width In. (mm)	Max. Bundle Diameter In. (mm)	Min. Loop Tensile Strength Lbs. (N)*	Std. Pkg. Qty.	Std. Ctn. Qty.
Cinch Ties								
UCT3S-X0	12.0 (305)	.85 (21.6)	.10 (2.5)	1.10 (27.9)	3.00 (76)	50 (222)	10	100
UCT5S-X0	18.0 (457)				5.00 (127)		10	100

Cinch Ties – Center Mount Grommet

UGCTC3S-X0‡	12.0 (305)	.85 (21.6)	.10 (2.5)	1.10 (27.9)	3.00 (76)	50 (222)	10	100
UGCTC5S-X0‡	18.0 (457)				5.00 (127)		10	100

Cinch Ties – End Mount Grommet

UGCTE3S-X0‡	12.0 (305)	.85 (21.6)	.10 (2.5)	1.10 (27.9)	3.00 (76)	50 (222)	10	100
UGCTE5S-X0‡	18.7 (457)				5.00 (127)		10	100

*Minimum 2" overlap required to achieve loop tensile strength.

‡1/4" (6mm) diameter mounting hole.

Screws for Grommet Cinch Ties

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
UCTGS1224-X	12-24 UNC 5/8 in. (.625") Flat Head Phillips Screw.	10	100
UCTGSM5-X	M5 x 16mm Flat Head Phillips Screw.	10	100
UCTGSM6-X	M6 x 16mm Flat Head Phillips Screw.	10	100

Use of above screws ensures screw head is mounted with grommet.

ULTRA-CINCH™ Tie Color Chart

Color	P/N Suffix	Example
Black	0	UCT3S-X0
Red	2	UCT3S-X2
Orange	3	UCT3S-X3
Yellow	4	UCT3S-X4
Green	5	UCT3S-X5
Blue	6	UCT3S-X6
Gray	8	UCT3S-X8
White	10	UCT3S-X10

ACCESSORIES



- Use with PANDUIT cable tie mounts for a complete wire routing solution
- Unique cradle design provides maximum stability for cable bundle
- Two styles: screw applied mounts and adhesive backed mounts



ULTRA-CINCH™ Hook & Loop Ties are part of the complete offering of PANDUIT premium Hook & Loop Cable Ties. Other products include:

- **TAK-TY® Hook & Loop Cable Ties** – Premium quality hook and loop solution offers an assortment of styles, sizes, materials and colors to meet a variety of applications
- **TAK-TAPE™ Hook & Loop Strips** – Thin and flexible hook and loop solution for general purpose bundling

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty



For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference CTCB24

©2007 PANDUIT Corp.
ALL RIGHTS RESERVED.
Printed in the U.S.A.
Product Bulletin Number **WW-CTCB24**
Replaces: SA-CTCB08
1/2007