Optoelectronics

UV 10.SF - Ultraviolet Detector

High Sensitivity



Description

UV 10.SF is made in TO-5 housing.
It includes the sensitive diode and the standard transmissive window.
Optionally, as shown on page 2, filter window types are available.
PerkinElmer Optoelectronics offers a range of selective sensors for ultraviolet radiation. This sensor series can be equipped with an integrated amplifier and is perfectly suited for the detection of any radiation ranging from 200 nm to 400 nm. High sensitivity, hermetic encapsulation, small dimension (TO-5) and low-cost structure provide suitability for both industrial and consumer applications.

UV detectors from PerkinElmer Optoelectronics are based on siliconcarbide, a material that offers new performance features at reasonable costs. Silicon-carbide provides a unique sensitivity in the spectral range from 200 nm to 400 nm (peak at 280 nm).

Applications

- Industrial Controls
- Sterilization
- · Commodity Applications
- Solar Measurements

Features


- High Sensitivity
- Solar Blind
- Low Temperature Dependence
- · Hermetic Package






UV 10.SF - Ultraviolet Detector High Sensitivity

Figure 1. Timing Diagram OUT GND

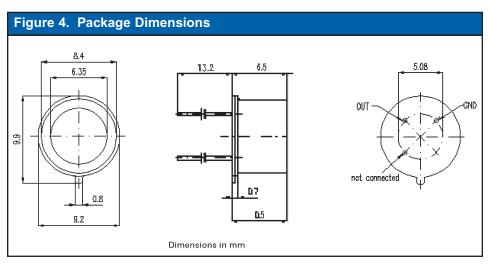



		Fle	ld of View U	V10 (Flat c	ap)		1,2
							1
							1,0
					1		0,5
	-				+		0,6
	/				1	\perp	0,6
	/						0,2
				<u> </u>			
-60 -6	0 40	30 -20		6 10 p(40)	20 3	40	69 60
E three -		Diode o	surrent vs. reve	erse Rise Voltes	*		
C.F-08					-		
4,E-09							
3,E-08							
7,F-08	_					_	
1,6-00				_	-		
	1	-				-	
0,E+00	1						
-1.6-05	-2,0	-1,0		0,0	1,0	2,0	X,0

Table 1. UV 10.SF Specifications							
Parameters	Typical	Units	Condition				
Radiant sensitivity	140	mA/W	standard window				
Spectral response	210-380	nm	5% of peak				
Wavelength of pk response	280	nm					
Sensitive area	5.4 x 10 ⁻²	mm²	active diode area				
Selectivity	>10 ⁻⁵		4002000 nm				
Dark current	0.2	fA					
Junction capacitance	21	pF					
Temperature coefficient	-0.5	%/K					
Storage temperature	-20 to 80	°C	non permanent				
Operating temperature	-20 to 80	°C	non permanent				
Window transparency	>210	nm					

For more information e-mail us at opto@perkinelmer.com or visit our website at www.perkinelmer.com/optoelectronics

All values are nominal; specifications subject to change without notice.

North America: PerkinElmer Optoelectronics 16800 Trans-Canada Highway Kirkland, Quebec J7V 8P7 Canada Toll Free: (877) 734-OPTO (6786) Phone: +1-450-424-3300 Fax: +1-450-424-3411 Europe: PerkinElmer Optoelectronics Wenzel-Jaksch-Str. 31 D-65199 Wiesbaden, Germany Phone: +49-611-492-430 Fax: +49-611-492-165

Asia.
47 Ayer Rajah Crescent #06-12
Singapore 139947
Phone: +65-6770-4366
Fax: +65-6775-1008

