


PHASE NOISE (1 Hz BW, typical)

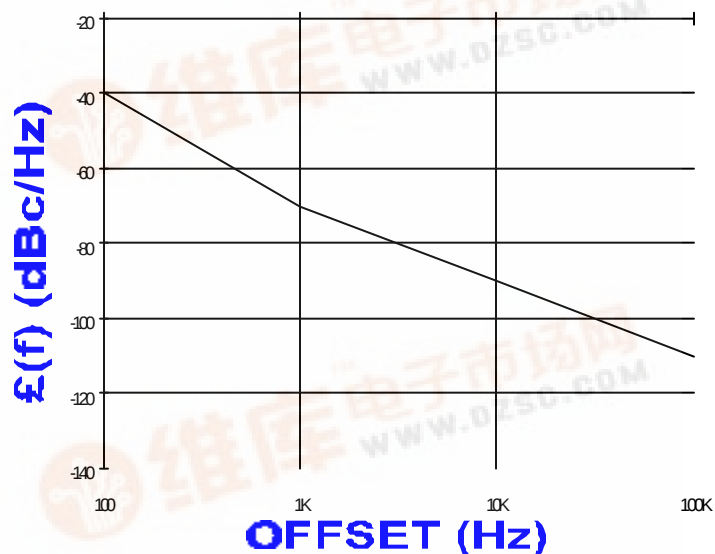

FEATURES

- Frequency Range: 3500 - 4000 MHz
- Tuning Voltage: 2-18 Vdc
- MINI-14H - Style Package

APPLICATIONS

- Direct Broadcast
- Microwave Radios
- Earthstations

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	3500 - 4000	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-90	dBc/Hz
Harmonic Suppression (2nd, typ.)	-20	dBc
Tuning Voltage	2-18	Vdc
Tuning Sensitivity (avg.)	40	MHz/V
Power Output	6±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<7	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<20	MHz
Operating Temperature Range	-20 to 60	°C
Package Style	MINI-14H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	8	Vdc
Supply Current (Icc, typ.)	26	mA

All specifications are typical unless otherwise noted and subject to change without notice.



APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:


 维库一下
 pdf.dzsc.com

V900ME01
PAGE 2

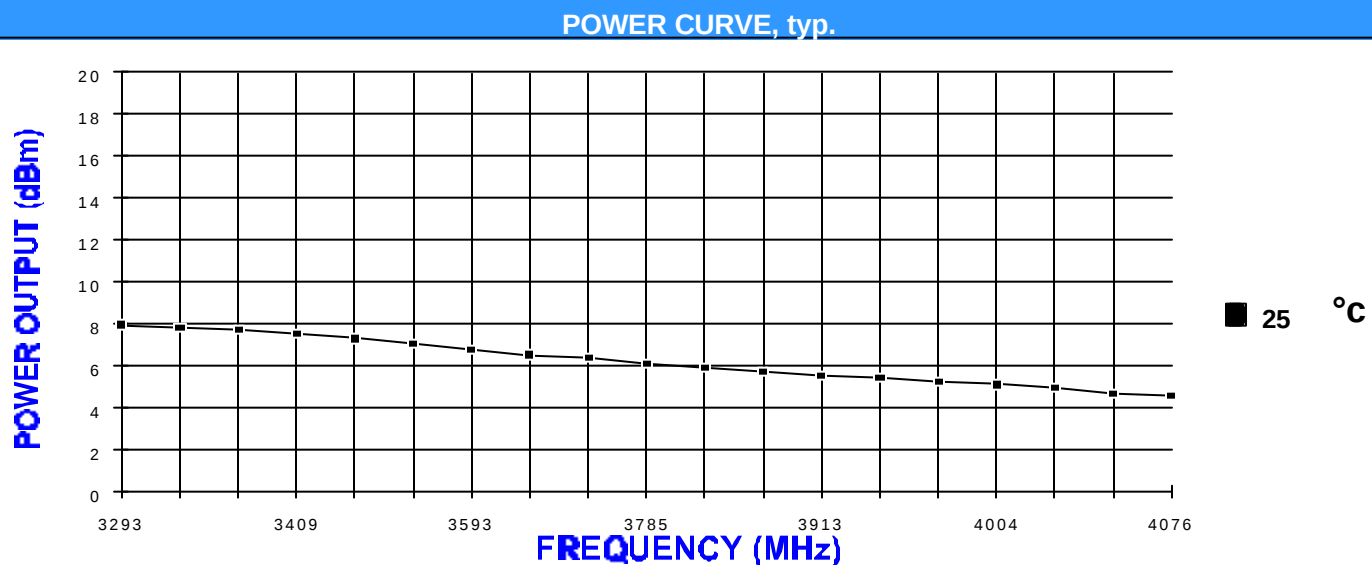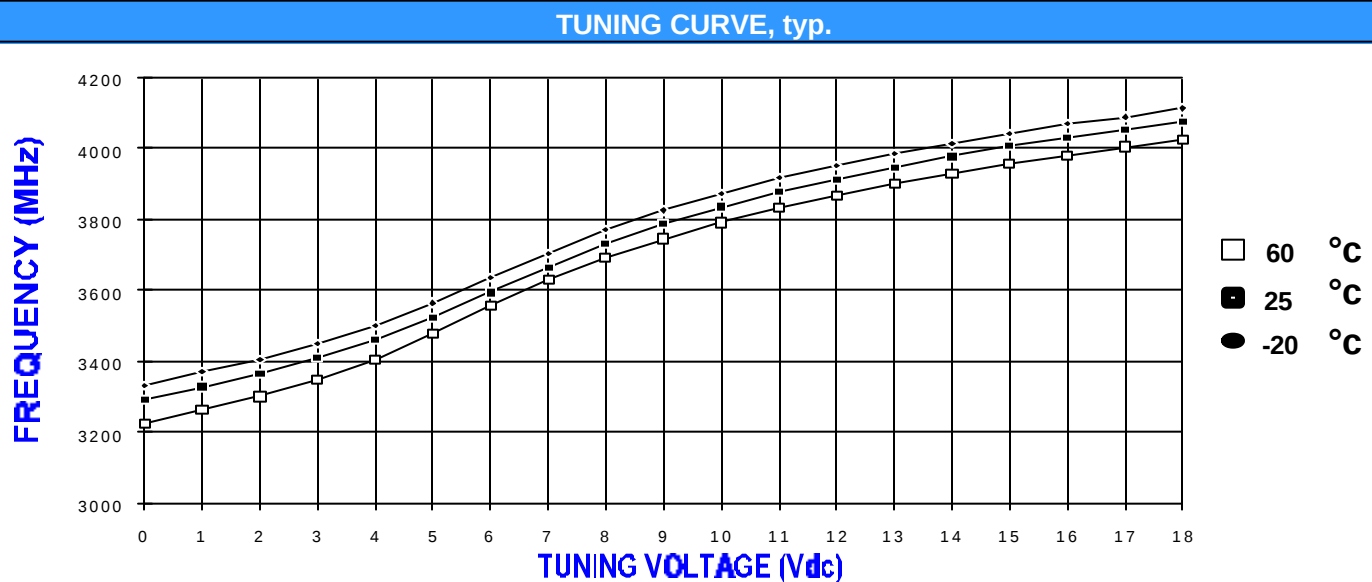

PHYSICAL DIMENSIONS

