

SPIRAL WRAP TUBING	1
ICO-FLEX EXPANDABLE SLEEVING	2
FLEX GUARD WIRE LOOM	3
VINYL TUBING	4
FIBERGLASS SLEEVING	5
TEFLON TUBING	6-7
TUBING REPAIR PRODUCTS	8-9

INDEX OF SLEEVING PRODUCTS

FGP - FLEX GUARD WIRE LOOM	3
SLV-40 - GENERAL PURPOSE VINYL TUBING	4
SLV-105 - HIGH-TEMPERATURE VINYL TUBING	4
SLV-130 - FIBERGLASS SLEEVING W/ VINYL JACKET	5
SLV-1200 - FIBERGLASS SLEEVING	5
SLW-ALFG - HEAT SHIELDING REPAIR PRODUCT	9
SLW-ALPU - EMI/RFI SHIELDING REPAIR PRODUCT	8
SLW-PVCP - REINFORCED REPAIR PRODUCT	8
STL - EXTRA THIN WALL TEFLON TUBING	6
STS - STANDARD WALL TEFLON TUBING	7
STT - THIN WALL TEFLON TUBING	6
SWN - NYLON SPIRAL WRAP TUBING	1
SWP - POLYETHYLENE SPIRAL WRAP TUBING	1
SWT - TEFLON SPIRAL WRAP TUBING	1
TTF - HEAVY WALL TEFLON TUBING	7
XPF - POLYESTER EXPANDABLE SLEEVING (FLAME RETARDANT)	2
XPFH - HALAR EXPANDABLE SLEEVING	2
XPNF - POLYESTER EXPANDABLE SLEEVING (NON-FLAME RETARDANT)	2

ICO RALLY, ProFIT, ProTECT, ProFLO, ProMARK and all product denoted with TM are trademarks or registered trademarks of ICO RALLY.

TEFLON is a registered trademark of E.I. du Pont de Nemours and Company Corporation

HALAR is a registered trademark of Ausimont U.S.A., Inc. Corporation

LIMITATIONS OF WARRANTY, REMEDY, AND LIABILITY


ICO RALLY warrants that products delivered are free from defects in material and workmanship and meets all specifications, which are in effect on the date of shipment. ICO RALLY makes no other warranty expressed or implied. All specifications are subject to change without notice.

Responsibility for validity in final applications or products remains the responsibility of the user. ICO RALLY encourages user testing, and will gladly provide standard product line samples for testing purposes.

All parties agree the Buyer's sole and exclusive remedy shall be for the repair or replacement of any defective part provided by the Seller. The essential purpose of this remedy shall be deemed fully satisfied as long as ICO RALLY is willing to repair or replace the defective part.

In no event shall ICO RALLY's liability under any claim exceed the price paid by the Buyer to ICO RALLY for the particular product, given rise to the claim. ICO RALLY will not be liable under any circumstances for any claim or liability based on breach of warranty or breach of contract including but not limited to loss of income, loss of profits, loss of sales, loss of use or damage to equipment, increased costs of operation, labor or facilities, or claims by third parties.

No person(s) or company is authorized to make any oral or written representations on ICO RALLY's behalf, which exceeds the foregoing.

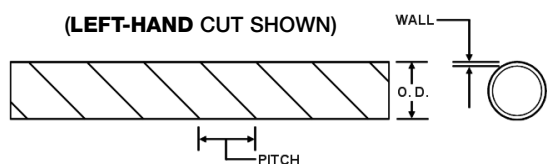

The gripping strength of spiral wrap tubing is enhanced by both its torsional cut and its rigid profile. It retains its strength under repeated flexing and bending and follows wire paths easily, which yields neat, free-running cable bundles. It is extremely useful on long continuous runs where many leads are required; wires can enter or break out at any point. Spiral wrap can be removed easily for troubleshooting and then re-applied.

SWP Polyethylene
SWP Polyethylene (black)

SWN Nylon (natural)

SWN Nylon (black)

SWT Teflon

Versatile, low cost material.

In addition to above, this material contains ultra-violet inhibitors, designed outdoor use. This material offers best mechanical protection and has a higher temperature rating than polyethylene.

In addition to above, this material contains ultra-violet inhibitors, designed outdoor use. This material is primarily used in high temperature applications. It also has an extremely low operating temperature and is not affected by organic solvents or acids.

SWP - POLYETHYLENE

Conforms to A-A-59602

Catalog Number Size	Nominal O.D.		Nominal Wall Thickness		Nominal Pitch		Maximum Bundle Size*		Colors**	Std. Spools*** ft / spool
	inches	mm	inches	mm	inches	mm	inches	mm		
SWP-1/8	0.125	3.18	0.031	0.79	0.250	6.35	0.5	12.7	Nat., Blk.	100, 500
SWP-3/16	0.188	4.76	0.031	0.79	0.250	6.35	1.5	38.1	Nat., Blk.	100, 500
SWP-1/4XXT	0.250	6.35	0.031	0.79	0.375	9.53	2.0	50.8	Nat., Blk.	100, 500
SWP-1/4XT	0.250	6.35	0.040	1.02	0.375	9.53	2.0	50.8	Nat., Blk.	100, 500
SWP-1/4	0.250	6.35	0.058	1.47	0.313	7.94	2.0	50.8	Nat., Blk.	100, 500
SWP-3/8	0.375	9.53	0.058	1.47	0.438	11.11	3.0	76.2	Nat., Blk.	100, 500
SWP-1/2	0.500	12.70	0.058	1.47	0.563	14.29	4.0	101.6	Nat., Blk.	100, 250
SWP-5/8	0.625	15.88	0.062	1.57	0.875	22.23	5.0	127.0	Nat., Blk.	50, 100 (Box)
SWP-3/4	0.750	19.05	0.065	1.65	0.875	22.23	6.0	152.4	Nat., Blk.	50, 100 (Box)
SWP-1"	1.000	25.40	0.100	2.54	0.875	22.23	8.0	203.2	Nat., Blk.	50, 100 (Box)

SWN - NYLON

Conforms to: A - A - 59602, MIL - T - 47287A

Catalog Number Size	Nominal O.D.		Nominal Wall Thickness		Nominal Pitch		Maximum Bundle Size*		Colors**	Std. Spools*** ft / spool
	inches	mm	inches	mm	inches	mm	inches	mm		
SWN-1/8	0.125	3.18	0.016	0.41	0.250	6.35	0.5	12.7	Nat., Blk.	100, 500
SWN-1/4	0.250	6.35	0.030	0.76	0.313	7.94	2.0	50.8	Nat., Blk.	100, 500
SWN-3/8	0.375	9.53	0.030	0.76	0.438	11.11	3.0	76.2	Nat., Blk.	100, 500
SWN-1/2	0.500	12.70	0.030	0.76	0.563	14.29	4.0	101.6	Nat., Blk.	100, 250
SWN-3/4	0.750	19.05	0.040	1.02	0.875	22.23	6.0	152.4	Nat., Blk.	50, 100 (Box)
SWN-1"	1.000	25.40	0.040	1.02	1.000	25.40	8.0	203.2	Nat., Blk.	50, 100 (Box)

SWT - TEFLON

Conforms to: A - A - 59602, MIL - T - 47287A, MIL - I - 22129B, AMS 3651B, 3653

Catalog Number Size	Nominal O.D.		Nominal Wall Thickness		Nominal Pitch		Maximum Bundle Size*		Colors**	Std. Spools*** ft / spool
	inches	mm	inches	mm	inches	mm	inches	mm		
SWT-1/8XXT	0.125	3.18	0.016	0.41	0.250	6.35	0.5	12.7	Natural	25, 100
SWT-1/8XT	0.125	3.18	0.020	0.51	0.250	6.35	0.5	12.7	Natural	50, 100
SWT-1/8	0.125	3.18	0.030	0.76	0.250	6.35	0.5	12.7	Natural	50, 100
SWT-3/16	0.188	4.76	0.030	0.76	0.250	6.35	1.0	25.4	Natural	25, 100
SWT-1/4XXT	0.250	6.35	0.015	0.38	0.375	9.53	2.0	50.8	Natural	25, 100
SWT-1/4XT	0.250	6.35	0.020	0.51	0.375	9.53	2.0	50.8	Natural	50, 100
SWT-1/4	0.250	6.35	0.030	0.76	0.375	9.53	2.0	50.8	Natural	50, 100
SWT-3/8	0.375	9.53	0.030	0.76	0.438	11.11	2.5	63.5	Natural	25, 100
SWT-1/2	0.500	12.70	0.030	0.76	0.563	14.29	3.0	76.2	Natural	25, 100
SWT-3/4	0.750	19.05	0.040	1.02	0.875	22.23	4.0	101.6	Natural	25, 100 (Box)
SWT-1"	1.000	25.40	0.040	1.02	1.000	25.40	6.0	152.4	Natural	25, 100 (Box)

* Size will vary on a specific bundle depending on desired flexibility and protection

** ADDITIONAL COLORS AVAILABLE ON REQUEST

*** Occasional random lengths

XPF and **XPNF** are light weight, self-fitting, monofilament sleeveings designed to encapsulate and protect cable bundles and wire assemblies. These expandable sleeveings adjust to irregular surfaces and contours, providing abrasion resistance and protection with a minimum of bulk and weight. Polyester ICO-FLEX is available in flame retardant (**XPF**) or non-flame retardant polyester monofilament (**XPNF**).

XPFH is an expandable sleeving produced from light weight Halar Fluoropolymer monofilament. It is ideal for high temperature applications where low out-gassing is required.

UL File Number: E142828
Operating Temp. Range: -94°F (-70°C) to 250°F (125°C)
Flammability: VW-1
Standard Colors: Black or White*
Std. Shipping Length: Spools

Operating Temp. Range: -103°F (-75°C) to 320°F (160°C)
Flammability: Self-extinguishing
Standard Color: Black
Std. Shipping Length: Spools

XPFH - HALAR

Flame Retardant Catalog Number Size	Nominal I.D.		Bundle Size Range (Minimum - Maximum)		Approximate Weight	Std. Length
	inches	mm	inches	mm	lbs / ft	ft / spool
XPFH-1/8	0.125	3.18	0.094 - 0.125	2.38 - 3.18	0.25	100, 1000
XPFH-1/4	0.250	6.35	0.125 - 0.375	3.18 - 9.53	0.38	100, 1000
XPFH-1/2	0.500	12.70	0.250 - 0.750	6.35 - 19.05	1.15	100, 500
XPFH-3/4	0.750	19.05	0.500 - 1.250	12.70 - 31.75	1.75	100, 250
XPFH-1-1/4	1.250	31.75	0.875 - 1.375	22.23 - 34.93	2.56	100, 250
XPFH-1-3/4	1.750	44.45	1.250 - 2.750	31.75 - 69.85	4.00	100, 200
XPFH-2	2.000	50.80	1.500 - 3.500	38.10 - 88.90	4.60	100
XPFH-2-1/2	2.500	63.50	1.750 - 4.250	44.45 - 107.95	5.50	100

XPF, XPNF - POLYESTER

Flame Retardant Catalog Number Size	Non- Flame Retardant Catalog Number Size	Nominal I.D.		Bundle Size Range (Minimum - Maximum)		Approximate Weight	Std. Length
		inches	mm	inches	mm	lbs / ft	ft / spool
XPF-1/8	XPNF-1/8	0.125	3.18	0.094 - 0.125	2.38 - 3.18	0.17	100, 1000
XPF-1/4	XPNF-1/4	0.250	6.35	0.125 - 0.375	3.18 - 9.53	0.25	100, 1000
XPF-3/8	XPNF-3/8	0.375	9.53	0.250 - 0.625	6.35 - 15.88	0.60	100, 1000
XPF-1/2	XPNF-1/2	0.500	12.70	0.250 - 0.750	6.35 - 19.05	0.75	100, 500
XPF-3/4	XPNF-3/4	0.750	19.05	0.500 - 1.250	12.70 - 31.75	1.25	100, 250
XPF-1-1/4	XPNF-1-1/4	1.250	31.75	0.750 - 1.500	19.05 - 38.10	1.65	100, 250
XPF-1-3/4	XPNF-1-3/4	1.750	44.45	1.250 - 2.500	31.75 - 63.50	2.75	100, 200
XPF-2	XPNF-2	2.000	50.80	1.500 - 3.000	38.10 - 76.20	3.35	100
XPF-2-1/2	XPNF-2-1/2	2.500	63.50	1.750 - 3.500	44.45 - 88.90	4.65	100

*Flame retardant sleeving is identified with colored tracers. Non-flame retardant sleeving is a solid color.

FGP's unique design permits easy, fast installation as a harness protective covering. The loom provides an easy opening seam for quick wire insertion. Since this seam is not permanently sealed, the costs for repair or service is reduced. Made of durable polyethylene, it is a harness covering material, resistant to temperature, weather and corrosion conditions. The convoluted surface enhances the appearance of your product by providing a uniform, tailored finish.


Operating Temperature Range: -40°F (-40°C) to 175°F (120°C)

Standard Colors: Black* (Non-Flame Retardant)

Gray (Flame Retardant)

Standard Shipping Length: Coils

Note: Standard Material is slit. Un-slit material also available.

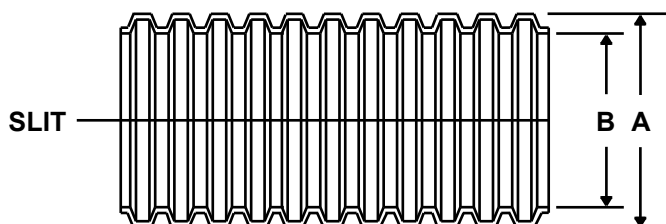

NON-FLAME RETARDANT POLYETHYLENE

Catalog Number Size	Nominal I.D. (B)		Maximum O.D. (A)		Std. Length ft / pkg.
	inches	mm	inches	mm	
FGP-5660-1/8	0.168	4.27	0.260	6.60	100, 500
FGP-5683-1/4	0.265	6.73	0.390	9.91	100, 500
FGP-5661-3/8	0.400	10.16	0.571	14.50	100, 500
FGP-5662-1/2	0.505	12.83	0.670	17.02	100, 500
FGP-5695-5/8	0.665	16.89	0.830	21.08	100, 500
FGP-5663-3/4	0.760	19.30	0.935	23.75	50, 250
FGP-5696-1"	1.006	25.55	1.280	32.51	50, 250
FGP-5698-1-1/2	1.550	39.37	1.860	47.24	25, 100
FGP-5699-2"	2.010	51.05	2.420	61.47	25, 100

*Other colors available, consult factory

Master package quantities available upon request

FLAME RETARDANT POLYETHYLENE

Catalog Number Size	Nominal I.D. (B)		Maximum O.D. (A)		Std. Length ft / pkg.
	inches	mm	inches	mm	
FGP-13156-1/4	0.265	6.73	0.390	9.91	100, 500
FGP-13158-3/8	0.400	10.16	0.571	14.50	100, 500
FGP-13159-1/2	0.505	12.83	0.670	17.02	100, 500
FGP-13160-5/8	0.665	16.89	0.830	21.08	100, 500
FGP-13170-3/4	0.760	19.30	0.935	23.75	50, 250
FGP-13180-1"	1.006	25.55	1.280	32.51	50, 250
FGP-13181-1-1/4	1.295	32.89	1.500	38.10	25, 100
FGP-13182-1-1/2	1.550	39.37	1.860	47.24	25, 100

Master package quantities available upon request

SLV-105 is a low cost, flexible, high temperature vinyl with excellent electrical, mechanical and thermal properties for applications up to 221°F (105°C).

Applicable Specifications: MIL-I-631, Grade C
 UL File Number: E52612
 Operating Temperature Range: 15°F (-10°C) to 220°F (105°C)
 Standard Colors: Black and Clear*
 Standard Shipping Length: Spools

SLV-40 is an extremely flexible material designed primarily for low temperature applications down to -85°F (-65°C), with continuous rating of 175°F (80°C). Widely used in applications where general purpose vinyls lose their flexibility.

Applicable Specifications: MIL-I-7444
 Operating Temperature Range: -85°F (-65°C) to 175°F (80°C)
 Standard Colors: Black and Clear*
 Standard Shipping Length: Spools

SLV-105 HIGH TEMPERATURE VINYL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLV-105-24	0.022	0.56	0.012	0.30	100, 1000
SLV-105-22	0.027	0.69	0.012	0.30	100, 1000
SLV-105-20	0.034	0.86	0.016	0.41	100, 1000
SLV-105-19	0.038	0.97	0.016	0.41	100, 1000
SLV-105-18	0.042	1.07	0.016	0.41	100, 1000
SLV-105-17	0.047	1.19	0.016	0.41	100, 1000
SLV-105-16	0.053	1.35	0.016	0.41	100, 1000
SLV-105-15	0.059	1.50	0.016	0.41	100, 1000
SLV-105-14	0.066	1.68	0.016	0.41	100, 1000
SLV-105-13	0.076	1.93	0.016	0.41	100, 1000
SLV-105-12	0.085	2.16	0.016	0.41	100, 1000
SLV-105-11	0.095	2.41	0.016	0.41	100, 1000
SLV-105-10	0.106	2.69	0.016	0.41	100, 1000
SLV-105-9	0.118	3.00	0.020	0.51	100, 1000
SLV-105-1/8	0.125	3.18	0.020	0.51	100, 1000
SLV-105-8	0.133	3.38	0.020	0.51	100, 1000
SLV-105-7	0.148	3.76	0.020	0.51	100, 1000
SLV-105-6	0.166	4.22	0.020	0.51	100, 1000
SLV-105-5	0.186	4.72	0.020	0.51	100, 1000
SLV-105-4	0.208	5.28	0.020	0.51	100, 1000
SLV-105-3	0.234	5.94	0.020	0.51	100, 1000
SLV-105-1/4	0.250	6.35	0.020	0.51	100, 1000
SLV-105-#2	0.263	6.68	0.020	0.51	100, 1000
SLV-105-#1	0.294	7.47	0.020	0.51	100, 1000
SLV-105-5/16	0.312	7.92	0.025	0.64	100, 500
SLV-105-0	0.330	8.38	0.020	0.51	100, 500
SLV-105-3/8	0.375	9.53	0.025	0.64	100, 500
SLV-105-7/16	0.438	11.13	0.025	0.64	100, 500
SLV-105-1/2	0.500	12.70	0.025	0.64	100, 500
SLV-105-9/16	0.562	14.27	0.030	0.76	100, 250
SLV-105-5/8	0.625	15.88	0.030	0.76	100, 250
SLV-105-3/4	0.750	19.05	0.035	0.89	100, 250
SLV-105-7/8	0.875	22.23	0.035	0.89	50, 100
SLV-105-1"	1.000	25.40	0.035	0.89	50, 100

*Additional sizes/colors available, consult factory.

SLV-40 LOW TEMPERATURE VINYL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLV-40-24	0.022	0.56	0.012	0.30	100, 1000
SLV-40-22	0.027	0.69	0.012	0.30	100, 1000
SLV-40-20	0.034	0.86	0.016	0.41	100, 1000
SLV-40-19	0.038	0.97	0.016	0.41	100, 1000
SLV-40-18	0.042	1.07	0.016	0.41	100, 1000
SLV-40-17	0.047	1.19	0.016	0.41	100, 1000
SLV-40-16	0.053	1.35	0.016	0.41	100, 1000
SLV-40-15	0.059	1.50	0.016	0.41	100, 1000
SLV-40-14	0.066	1.68	0.016	0.41	100, 500
SLV-40-13	0.076	1.93	0.016	0.41	100, 500
SLV-40-12	0.085	2.16	0.016	0.41	100, 500
SLV-40-11	0.095	2.41	0.016	0.41	100, 500
SLV-40-10	0.106	2.69	0.016	0.41	100, 500
SLV-40-9	0.118	3.00	0.020	0.51	100, 500
SLV-40-1/8	0.125	3.18	0.020	0.51	100, 500
SLV-40-8	0.133	3.38	0.020	0.51	100, 500
SLV-40-7	0.148	3.76	0.020	0.51	100, 500
SLV-40-6	0.166	4.22	0.020	0.51	100, 500
SLV-40-5	0.186	4.72	0.020	0.51	100, 500
SLV-40-4	0.208	5.28	0.020	0.51	100, 500
SLV-40-3	0.234	5.94	0.020	0.51	100, 500
SLV-40-1/4	0.250	6.35	0.020	0.51	100, 500
SLV-40-#2	0.263	6.68	0.020	0.51	100, 500
SLV-40-#1	0.294	7.47	0.020	0.51	100, 500
SLV-40-5/16	0.312	7.92	0.025	0.64	100, 500
SLV-40-0	0.330	8.38	0.020	0.51	100, 500
SLV-40-3/8	0.375	9.53	0.025	0.64	100, 300
SLV-40-7/16	0.438	11.13	0.025	0.64	100, 300
SLV-40-1/2	0.500	12.70	0.025	0.64	100, 300
SLV-40-9/16	0.562	14.27	0.030	0.76	100, 200
SLV-40-5/8	0.625	15.88	0.030	0.76	100, 200
SLV-40-3/4	0.750	19.05	0.035	0.89	100, 200
SLV-40-7/8	0.875	22.23	0.035	0.89	50, 100
SLV-40-1"	1.000	25.40	0.035	0.89	50, 100

*Additional sizes/colors available, consult factory.

SLV-130 combines fiberglass and a vinyl insulation jacket. It has good abrasion resistance, excellent cut through characteristics, and non-fray ends. It is widely used in applications up to 265°F (130°C) where tubing is subject to knotting, bending, and high torque.

Applicable Specifications: MIL-I-3190, Class B, Grade B
Operating Temp. Range: -5°F (-20°C) to 265°F (130°C)
Standard Color: Black*
Std. Shipping Length: Spools

SLV-1200 is a sleeving of tightly braided 100% fiberglass for use in temperatures up to 1200°F (650°C). Closely woven construction provides maximum abrasion resistance and high flexibility. The material is treated to remove all organic matter and to render the glass braid fray-resistant.

Applicable Specifications: MIL-I-3190, Class C
Operating Temp. Range: -75°F (-60°C) to 1200°F (650°C)
Standard Color: Natural
Std. Shipping Length: Spools

SLV-130 FIBERGLASS W/ VINYL JACKET

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLV-130-24	0.022	0.56	0.014	0.36	100, 500
SLV-130-22	0.027	0.69	0.014	0.36	100, 500
SLV-130-20	0.034	0.86	0.014	0.36	100, 500
SLV-130-19	0.038	0.97	0.014	0.36	100, 500
SLV-130-18	0.042	1.07	0.016	0.41	100, 500
SLV-130-17	0.047	1.19	0.016	0.41	100, 500
SLV-130-16	0.053	1.35	0.016	0.41	100, 500
SLV-130-15	0.059	1.50	0.016	0.41	100, 500
SLV-130-14	0.066	1.68	0.018	0.46	100, 500
SLV-130-13	0.076	1.93	0.018	0.46	100, 250
SLV-130-12	0.085	2.16	0.018	0.46	100, 250
SLV-130-11	0.095	2.41	0.018	0.46	100, 250
SLV-130-10	0.106	2.69	0.020	0.50	100, 250
SLV-130-9	0.118	3.00	0.020	0.50	100, 250
SLV-130-8	0.133	3.38	0.020	0.50	100, 250
SLV-130-7	0.148	3.76	0.020	0.50	100, 250
SLV-130-6	0.166	4.22	0.020	0.50	100, 250
SLV-130-5	0.186	4.72	0.020	0.50	100, 250
SLV-130-4	0.208	5.28	0.022	0.55	100, 250
SLV-130-3	0.234	5.94	0.022	0.55	100, 250
SLV-130-#2	0.263	6.68	0.026	0.65	100, 250
SLV-130-#1	0.294	7.47	0.032	0.81	100
SLV-130-0	0.330	8.38	0.032	0.81	100
SLV-130-3/8	0.387	9.83	0.037	0.93	100
SLV-130-7/16	0.450	11.43	0.037	0.93	100
SLV-130-1/2	0.512	13.00	0.037	0.93	100
SLV-130-5/8	0.640	16.26	0.041	1.03	100
SLV-130-3/4	0.768	19.51	0.051	1.28	100
SLV-130-7/8	0.893	22.68	0.057	1.44	100
SLV-130-1"	1.018	25.86	0.057	1.44	100

SLV-1200 FIBERGLASS

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLV-1200-24	0.022	0.56	0.010	0.25	100, 500
SLV-1200-22	0.027	0.69	0.010	0.25	100, 500
SLV-1200-20	0.034	0.86	0.010	0.25	100, 500
SLV-1200-19	0.038	0.97	0.015	0.38	100, 500
SLV-1200-18	0.042	1.07	0.015	0.38	100, 500
SLV-1200-17	0.047	1.19	0.015	0.38	100, 500
SLV-1200-16	0.053	1.35	0.015	0.38	100, 500
SLV-1200-15	0.059	1.50	0.015	0.38	100, 500
SLV-1200-14	0.066	1.68	0.015	0.38	100, 500
SLV-1200-13	0.076	1.93	0.015	0.38	100, 250
SLV-1200-12	0.085	2.16	0.015	0.38	100, 250
SLV-1200-11	0.095	2.41	0.015	0.38	100, 250
SLV-1200-10	0.106	2.69	0.015	0.38	100, 250
SLV-1200-9	0.118	3.00	0.015	0.38	100, 250
SLV-1200-8	0.133	3.38	0.015	0.38	100, 250
SLV-1200-7	0.148	3.76	0.015	0.38	100, 250
SLV-1200-6	0.166	4.22	0.015	0.38	100, 250
SLV-1200-5	0.186	4.72	0.015	0.38	100, 250
SLV-1200-4	0.208	5.28	0.015	0.38	100, 250
SLV-1200-3	0.234	5.94	0.015	0.38	100, 250
SLV-1200-#2	0.263	6.68	0.020	0.51	100, 250
SLV-1200-#1	0.294	7.47	0.020	0.51	100
SLV-1200-0	0.330	8.38	0.020	0.51	100
SLV-1200-3/8	0.387	9.83	0.032	0.81	100
SLV-1200-7/16	0.450	11.43	0.032	0.81	100
SLV-1200-1/2	0.512	13.00	0.032	0.81	100
SLV-1200-5/8	0.640	16.26	0.032	0.81	100
SLV-1200-3/4	0.768	19.51	0.032	0.81	100
SLV-1200-7/8	0.893	22.68	0.032	0.81	100
SLV-1200-1"	1.018	25.86	0.032	0.81	100

*Additional sizes/colors available, consult factory.

STL is a lightweight, extra thin wall Teflon tubing that provides the performance properties inherent to Teflon at a lower cost. The lighter weight material creates a more flexible tubing without sacrificing the maximum continuous operating temperature of 500°F (260°C).

Appl. Specifications: AMS-3651B & AMS-3654

UL File Number: E52612

Operating Temp. Range: -103°F (-75°C) to 500°F (260°C)

Flammability: VW-1

Standard Color: Natural* (Translucent to opaque white)

Std. Shipping Length: Coils or spools (1/8" I.D. and above)

STT is the most popular thin wall Teflon tubing offering maximum mechanical and electrical protection. Unlike other conventional thermoplastic materials, Teflon will not shrink if exposed to a hot soldering iron. In addition, Teflon will not absorb moisture and has the lowest coefficient of friction of all materials.

Appl. Specifications: AMS-3651B & AMS-3655

UL File Number: E52612

Operating Temp. Range: -103°F (-75°C) to 500°F (260°C)

Flammability: VW-1

Standard Color: Natural* (Translucent to opaque white)

Std. Shipping Length: Coils or spools (1/8" I.D. and above)

STL - EXTRA THIN WALL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / pkg
	inches	mm	inches	mm	
STL-28	0.015	0.38	0.006	0.15	100, 1000
STL-26	0.018	0.46	0.006	0.15	100, 1000
STL-24	0.022	0.56	0.006	0.15	100, 1000
STL-22	0.027	0.69	0.006	0.15	100, 1000
STL-20	0.034	0.86	0.006	0.15	100, 1000
STL-19	0.038	0.97	0.006	0.15	100, 1000
STL-18	0.042	1.07	0.006	0.15	100, 1000
STL-17	0.047	1.19	0.006	0.15	100, 1000
STL-16	0.053	1.35	0.006	0.15	100, 1000
STL-15	0.059	1.50	0.006	0.15	100, 1000
STL-14	0.066	1.68	0.008	0.20	100, 500
STL-13	0.076	1.93	0.008	0.20	100, 500
STL-12	0.085	2.16	0.008	0.20	100, 500
STL-11	0.095	2.41	0.008	0.20	100, 500
STL-10	0.106	2.70	0.008	0.20	100, 500
STL-9	0.118	3.00	0.008	0.20	100, 500
STL-1/8	0.125	3.18	0.008	0.20	100
STL-8	0.133	3.38	0.008	0.20	100
STL-7	0.148	3.76	0.008	0.20	100
STL-6	0.166	4.22	0.010	0.25	100
STL-5	0.186	4.72	0.010	0.25	100
STL-4	0.208	5.28	0.010	0.25	100
STL-3	0.234	5.94	0.010	0.25	100
STL-1/4	0.255	6.48	0.010	0.25	100
STL-#2	0.263	6.68	0.010	0.25	100
STL-#1	0.294	7.47	0.010	0.25	100
STL-5/16	0.318	8.08	0.012	0.30	100
STL-0	0.330	8.38	0.012	0.30	100

*Additional sizes/colors available, consult factory.

STT - THIN WALL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / pkg
	inches	mm	inches	mm	
STT-30	0.012	0.30	0.009	0.23	100, 1000
STT-28	0.015	0.38	0.009	0.23	100, 1000
STT-26	0.018	0.46	0.009	0.23	100, 1000
STT-24	0.022	0.56	0.010	0.23	100, 1000
STT-22	0.027	0.69	0.010	0.25	100, 1000
STT-20	0.034	0.86	0.012	0.25	100, 1000
STT-19	0.038	0.97	0.012	0.30	100, 1000
STT-18	0.042	1.07	0.012	0.30	100, 1000
STT-17	0.047	1.19	0.012	0.30	100, 1000
STT-16	0.053	1.35	0.012	0.30	100, 1000
STT-15	0.059	1.50	0.012	0.30	100, 1000
STT-14	0.066	1.68	0.012	0.30	100, 500
STT-13	0.076	1.93	0.012	0.30	100, 500
STT-12	0.085	2.16	0.012	0.30	100, 500
STT-11	0.095	2.41	0.012	0.30	100, 500
STT-10	0.106	2.70	0.012	0.30	100, 500
STT-9	0.118	3.00	0.015	0.30	100, 500
STT-1/8	0.125	3.18	0.015	0.38	100
STT-8	0.133	3.38	0.015	0.38	100
STT-7	0.148	3.76	0.015	0.38	100
STT-6	0.166	4.22	0.015	0.38	100
STT-5	0.186	4.72	0.015	0.38	100
STT-4	0.208	5.28	0.015	0.38	100
STT-3	0.234	5.94	0.015	0.38	100
STT-1/4	0.255	6.48	0.015	0.38	100
STT-2	0.263	6.68	0.015	0.38	100
STT-1	0.294	7.47	0.015	0.38	100
STT-5/16	0.318	8.08	0.015	0.38	100
STT-0	0.330	8.38	0.015	0.38	100

*Additional sizes/colors available, consult factory.

STS standard wall Teflon tubing is utilized in most military applications. Special extrusion techniques produce a pin-hole-free tubing with uniform concentricity. **STS** is ideal for applications where heat resistance, excellent dielectric values, and chemically inert properties are required.

Appl. Specifications: AMS-3651B, AMS-3653
& MIL-I-22129C

UL File Number: E52612

Operating Temp. Range: -103°F (-75°C) to 500°F (260°C)

Flammability: VW-1

Standard Color: Natural (Translucent to opaque white)

Std. Shipping Length: Coils or spools (1/8" I.D. and above)

The heavy wall construction of **TTF** offers the highest dielectric strength of all ICO RALLY's Teflon sleeving products. **TTF** is the sleeving product of choice for applications that require an aggressive operating temperature range, high dielectric strength, and maximum rigidity.

Appl. Specifications: AMS-3651B

Operating Temp. Range: -103°F (-75°C) to 500°F (260°C)

Flammability: VW-1

Standard Colors: Natural (Translucent to Opaque White)

Std. Shipping Length: Coils

STS - STANDARD WALL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / pkg
	inches	mm	inches	mm	
STS-24	0.022	0.56	0.012	0.30	100, 1000
STS-22	0.027	0.69	0.012	0.30	100, 1000
STS-20	0.034	0.86	0.016	0.41	100, 1000
STS-19	0.038	0.97	0.016	0.41	100, 1000
STS-18	0.042	1.07	0.016	0.41	100, 1000
STS-17	0.047	1.19	0.016	0.41	100, 1000
STS-16	0.053	1.35	0.016	0.41	100, 1000
STS-15	0.059	1.50	0.016	0.41	100, 1000
STS-14	0.066	1.68	0.016	0.41	100, 500
STS-13	0.076	1.93	0.016	0.41	100, 500
STS-12	0.085	2.16	0.016	0.41	100, 500
STS-11	0.095	2.41	0.016	0.41	100, 500
STS-10	0.106	2.70	0.016	0.41	100, 500
STS-9	0.118	3.00	0.020	0.51	100, 500
STS-1/8	0.125	3.18	0.020	0.51	100, 500
STS-8	0.133	3.38	0.020	0.51	100
STS-7	0.148	3.76	0.020	0.51	100
STS-6	0.166	4.22	0.020	0.51	100
STS-5	0.186	4.72	0.020	0.51	100
STS-4	0.208	5.28	0.020	0.51	100
STS-3	0.234	5.94	0.020	0.51	100
STS-1/4	0.255	6.48	0.020	0.51	100
STS-2	0.263	6.68	0.020	0.51	100
STS-1	0.294	7.47	0.020	0.51	100
STS-5/16	0.318	8.08	0.020	0.51	100
STS-0	0.330	8.38	0.020	0.51	100

Additional sizes/colors available, consult factory.

TTF - HEAVY WALL

Catalog Number Size	Nominal I.D.		Nominal Wall Thickness		Std. Length ft / coil
	inches	mm	inches	mm	
TTF-1/16	0.062	1.57	0.030	0.76	25, 100
TTF-1/8	0.125	3.18	0.030	0.76	25, 100
TTF-3/16	0.188	4.78	0.030	0.76	25, 100
TTF-1/4	0.250	6.35	0.030	0.76	25, 100
TTF-5/16	0.313	7.95	0.030	0.76	25, 100
TTF-3/8	0.375	9.53	0.030	0.76	25, 100
TTF-7/16	0.438	11.13	0.030	0.76	25, 100
TTF-1/2	0.500	12.70	0.030	0.76	25, 100
TTF-9/16	0.562	14.27	0.030	0.76	5, 25
TTF-5/8	0.625	15.88	0.030	0.76	5, 25
TTF-11/16	0.688	17.48	0.032	0.81	5, 25
TTF-3/4	0.750	19.05	0.040	1.02	5, 25
TTF-7/8	0.875	22.23	0.045	1.14	5, 25
TTF-1	1.000	25.40	0.050	1.27	5, 25

Additional sizes/colors available, consult factory.

SLW-PVCP is a general-purpose sleeving repair product that employs a light-weight, flexible jacket of vinyl-coated polyester and an adhesive closure. **SLW-PVCP** is valuable in applications where flexibility, tear resistance, and abrasion resistance is required. Installation is as easy as wrapping the product around the wire or cable, removing the protective liner from the adhesive and overlapping the side edges to create a tube.

Operating Temperature Range: -4°F (-20°C) to 212°F (100°C)

Flammability: VW-1

Standard Color: Black

Standard Shipping Length: Spools

Catalog Number Size	Maximum Cable Diameter		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLW-PVCP-3/4"	0.75	19.1	0.010	0.25	100
SLW-PVCP-1"	1.00	25.4	0.010	0.25	100
SLW-PVCP-1-1/4"	1.25	31.8	0.010	0.25	100
SLW-PVCP-1-1/2"	1.50	38.1	0.010	0.25	100
SLW-PVCP-1-3/4"	1.75	44.5	0.010	0.25	100
SLW-PVCP-2"	2.00	50.8	0.010	0.25	100
SLW-PVCP-2-1/4"	2.25	57.2	0.010	0.25	100
SLW-PVCP-2-1/2"	2.50	63.5	0.010	0.25	100
SLW-PVCP-2-3/4"	2.75	69.9	0.010	0.25	100
SLW-PVCP-3"	3.00	76.2	0.010	0.25	100
SLW-PVCP-3-1/4"	3.25	82.6	0.010	0.25	100
SLW-PVCP-3-1/2"	3.50	88.9	0.010	0.25	100
SLW-PVCP-4"	4.00	101.6	0.010	0.25	100

EMI/RFI SHIELDING REPAIR PRODUCT

SLW-ALPU is an EMI shielding material that utilizes polyurethane jacketed aluminum foil. This product is ideal for electrical applications where shielding is necessary. **SLW-ALPU** is installed by wrapping the split tubing around the wire or cable assembly and sticking the side edges together using the adhesive liner to form a protective tube.

Avg. Shielding Attenuation: 102 dB (10MHz - 20GHz)

Flammability: VW-1

Standard Color: Black

Standard Shipping Length: Spools

Catalog Number Size	Maximum Cable Diameter		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLW-ALPU-3/4"	0.75	19.1	0.010	0.25	25, 100
SLW-ALPU-1"	1.00	25.4	0.010	0.25	25, 100
SLW-ALPU-1-1/4"	1.25	31.8	0.010	0.25	25, 100
SLW-ALPU-1-1/2"	1.50	38.1	0.010	0.25	25, 100
SLW-ALPU-1-3/4"	1.75	44.5	0.010	0.25	25, 100
SLW-ALPU-2"	2.00	50.8	0.010	0.25	25, 100
SLW-ALPU-2-1/4"	2.25	57.2	0.010	0.25	25, 100
SLW-ALPU-2-1/2"	2.50	63.5	0.010	0.25	25, 100
SLW-ALPU-2-3/4"	2.75	69.9	0.010	0.25	25, 100
SLW-ALPU-3"	3.00	76.2	0.010	0.25	25, 100
SLW-ALPU-3-1/4"	3.25	82.6	0.010	0.25	25, 100
SLW-ALPU-3-1/2"	3.50	88.9	0.010	0.25	25, 100
SLW-ALPU-3-3/4"	3.75	95.3	0.010	0.25	25, 100
SLW-ALPU-4"	4.00	101.6	0.010	0.25	25, 100

SLW-ALFG utilizes a high-performance acrylic adhesive to bond aluminum and polymer-coated fiberglass. This repair product is exceptionally useful in moderate temperature heat barrier applications (<300 °F). A protective enclosure is created by wrapping the split tubing around the wire and cable assembly, removing the liner from the adhesive, and sticking the side edges together to form a tube.


Maximum Operating Temperature: 450°F (232°C)

Flammability: Self-extinguishing

Standard Color: Silver


Standard Shipping Length: Spools

Catalog Number Size	Maximum Cable Diameter		Nominal Wall Thickness		Std. Length ft / spool
	inches	mm	inches	mm	
SLW-ALFG-3/8"	0.37	9.5	0.016	0.41	100
SLW-ALFG-1/2"	0.50	12.7	0.016	0.41	100
SLW-ALFG-5/8"	0.62	15.8	0.016	0.41	100
SLW-ALFG-3/4"	0.75	19.0	0.016	0.41	100
SLW-ALFG-7/8"	0.87	22.2	0.016	0.41	100
SLW-ALFG-1"	1.00	25.4	0.016	0.41	100
SLW-ALFG-1-1/8"	1.12	28.5	0.016	0.41	100
SLW-ALFG-1-1/4"	1.25	31.7	0.016	0.41	100
SLW-ALFG-1-3/8"	1.37	34.9	0.016	0.41	100
SLW-ALFG-1-1/2"	1.50	38.1	0.016	0.41	100
SLW-ALFG-1-3/4"	1.75	44.4	0.016	0.41	100
SLW-ALFG-2"	2.00	50.8	0.016	0.41	100
SLW-ALFG-2-1/4"	2.25	57.1	0.016	0.41	100
SLW-ALFG-2-1/2"	2.50	63.5	0.016	0.41	100
SLW-ALFG-2-3/4"	2.75	69.8	0.016	0.41	100
SLW-ALFG-3"	3.00	76.2	0.016	0.41	100

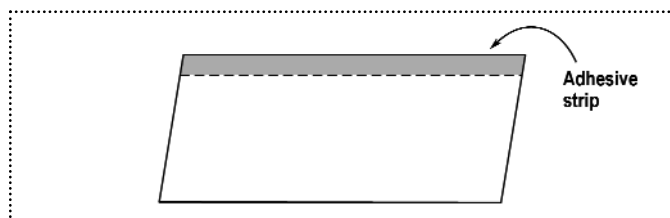


SLW Repair Tubing as supplied.

Select size based on outside diameter of wire or cable assembly which requires repair.

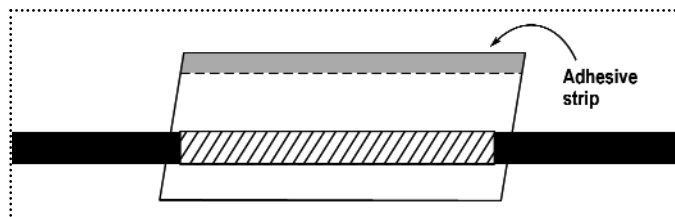

1. Clean surface of substrate that will be exposed to inside diameter of **SLW** product.
2. Position **SLW** product over area which requires repair with adhesive strip facing **down**.
3. Remove protective liner from adhesive strip.

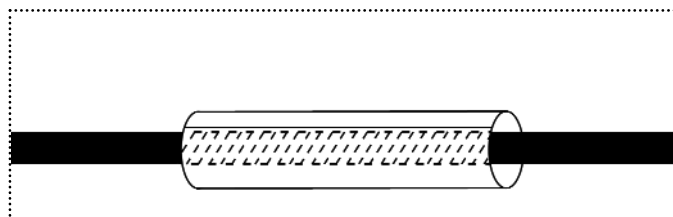

4. Fold adhesive strip side under opposing edge to create a tight-fitting tube.