


NYLON 6/6 (RMS-01) COLOR: NATURAL PART NO.	UV STABILIZED (RMS-46) COLOR: BLACK PART NO.	MAX. BUNDLE DIA.	NYLON 6/6 FLAME RET. (RMS-75A), UL94-V0 COLOR: WHITE	NYLON 6/6 (RMS-73) LOW TEMPERATURE COLOR: BLACK	NYLON 6/6 HEAT STABILIZED (RMS-47) UL 94-V2 COLOR: BLACK	NYLON 6/6 (RMS-01) MIL-SPEC S-23190 MS3367-7-9 COLOR: NATURAL	UV STABILIZED (RMS-46) MIL-SPEC S-23190 MS3367-7-0 COLOR: BLACK
WIT-60R	WIT-60R-UVB	2-3/4 (69.9)	WIT-60R-V0	WIT-60R-ST	WIT-60R-HS	WIT-60R-MIL	WIT-60R-UVB-MIL

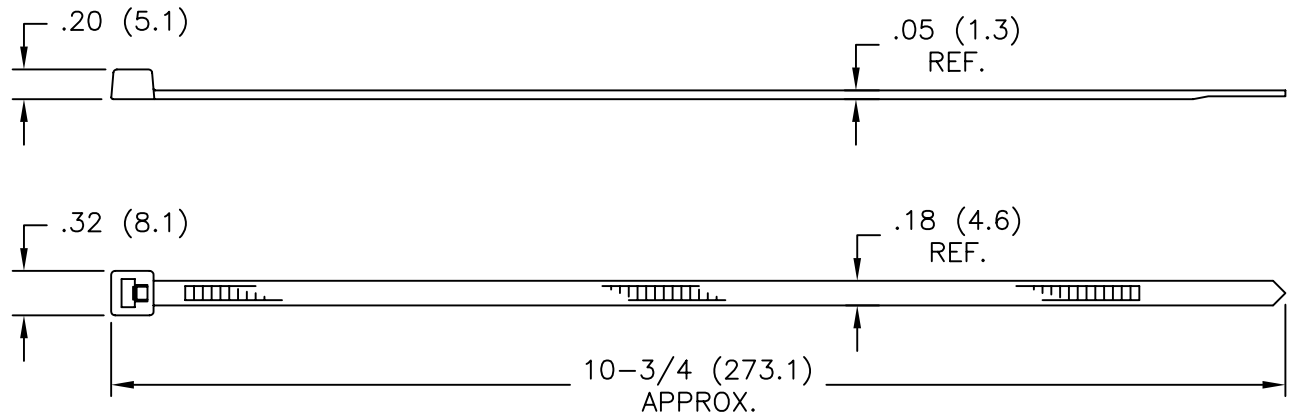

NOTES:

1. MIN. LOOP TENSILE: 60 lbs
2. COLORS: GREEN (-GN), BLUE (-BL), YELLOW (-YL), RED (-RD), NEON-GREEN (-NGN), NEON-YELLOW (-NYL), NEON-PINK (-NPK) AND NEON-ORANGE (-NOR), AVAILABLE BY SPECIAL ORDER ONLY. TO ORDER, ADD COLOR SUFFIX TO PART NO.
3. MATERIAL: NYLON 4/6 (RMS-109), HI TEMPERATURE COLOR: NATURAL. AVAILABLE BY SPECIAL ORDER ONLY. TO ORDER, ADD "-HT" TO PART NO. MATERIAL HAS A UL RELATIVE THERMAL INDEX OF 266°F (130°C)

TITLE: WIT-60 SERIES		DWG IN IN (MM)		FINAL		PRINT TYPE CA	
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # WIT-60	DWN: P.B.	APP:	PART #		SEE TABLE	
	MAT'L: SEE NOTES & TABLE	DT: 08-09-95	DT:	RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060			
	RE: RICHCO, INC.						

C	UPDATED NOTES AND TABLE PER CATALOG	SM 05.06.02
B	CHANGED FILE NO.	SM 04.01.02
A	RMS-46 ADDED TO PRINT	JL 06.03.99
REV	DESCRIPTION	ENGR DATE