




# TSM4

Vishay Sfernice

## Surface Mount Miniature Trimmers Multi-Turn Cermet Sealed

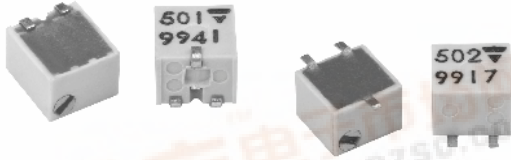


The TSM4 trimming potentiometer has been designed for surface mount applications and offers volumetric efficiency  $5 \times 5 \times 3.7 \text{ mm}^3$  with high performance and stability.

The TSM4 design is suitable for both manual or automatic operation, and can withstand vapor phase and reflow soldering techniques.


### FEATURES

- 0.25 Watt at 85°C
- Professional grade
- Excellent stability
- Wide ohmic range
- Low contact resistance variation
- Small size for optimum packing density
- Suitable for both manual or automatic operation


### DIMENSIONS in millimeters

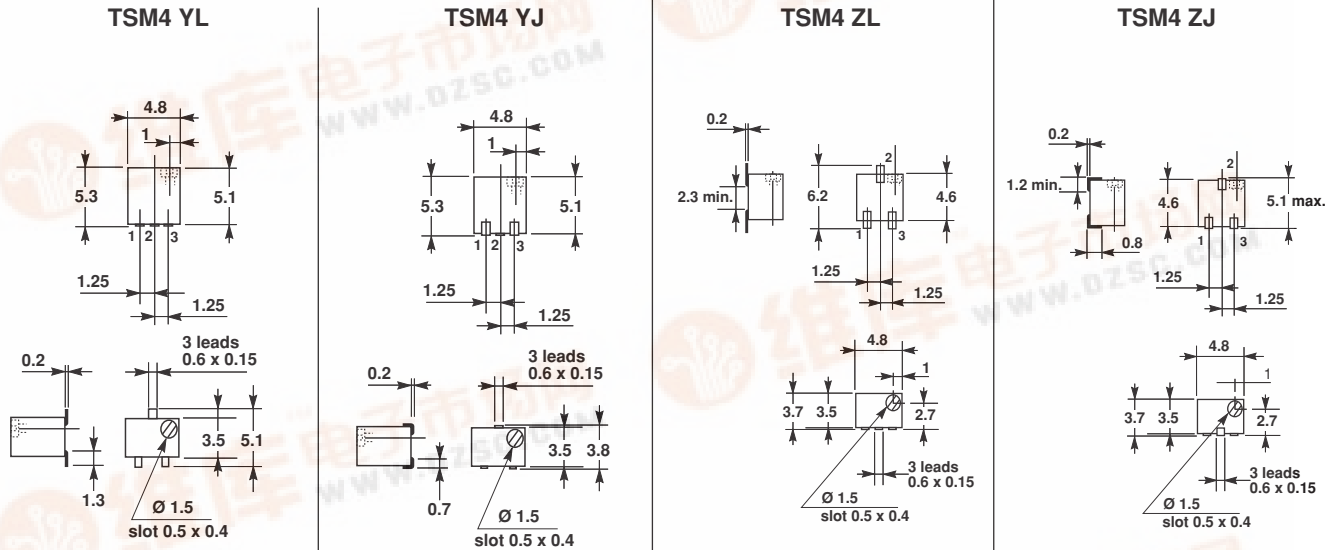

### RECOMMENDED SOLDERING AREAS

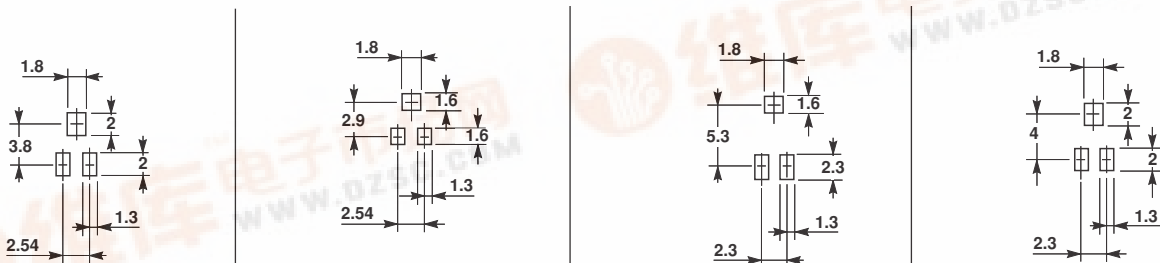

### CIRCUIT DIAGRAM





| ELECTRICAL SPECIFICATIONS             |             |                                       |
|---------------------------------------|-------------|---------------------------------------|
| Resistive Element                     |             | Cermet                                |
| Electrical Travel                     |             | 11 turns $\pm$ 2                      |
| Resistance Range                      |             | 10 $\Omega$ to 1M $\Omega$            |
| Standard Series                       |             | 1 - 2 - 5                             |
| Tolerance Standard                    |             | $\pm$ 10%                             |
| Power Rating                          | Linear      | 0.25W at + 85°C                       |
|                                       | Logarithmic | not applicable                        |
| Temperature Coefficient               |             | See Standard Resistance Element Table |
| Limiting Element Voltage (Linear Law) |             | 200V                                  |
| Contact Resistance Variation          |             | 1% or 3 $\Omega$                      |
| End Resistance (Typical)              |             | 1 $\Omega$                            |
| Dielectric Strength (RMS)             |             | 600V                                  |
| Insulation Resistance                 |             | 10 <sup>6</sup> M $\Omega$            |


## MECHANICAL SPECIFICATIONS

|                             |                  |
|-----------------------------|------------------|
| Mechanical Travel           | 13 turns $\pm$ 2 |
| Operating Torque (max. Ncm) | 1                |
| End Stop Torque (Ncm)       | clutch action    |
| Unit Weight (max. g)        | 0.15             |

## ENVIRONMENTAL SPECIFICATIONS

|                   |   |
|-------------------|---|
| Temperature Range | - 55°C to + 125°C                         |
| Climatic Category | 55 / 125 / 56                             |
| Sealing           | sealed container<br>solder immersion IP67 |

## POWER RATING CHART

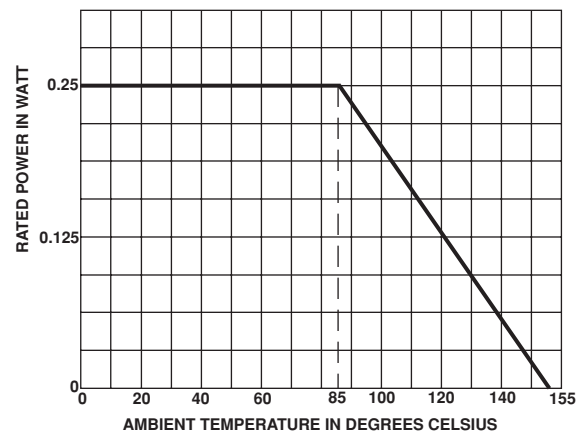

| PERFORMANCE                                 |   |   |   |
|---|---|---|---|
| TESTS                                       | CONDITIONS  | TYPICAL VALUES AND DRIFTS   |   |
|   |   | $\frac{\Delta RT}{RT}$ (%)  | $\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)          |
| Load Life                                   | 1000 hours at rated power<br>90'/30' - ambient temperature + 85°C                                 | $\pm$ 2%<br>Contact resistance variation: $\Delta > 1\%$ Rn                               | $\pm$ 3%                                      |
| Moisture Resistance                         | MIL STD 202 Method 106<br>10 cycles of 24 hours constituted<br>with damp heat - cold - vibrations | $\pm$ 2%<br>Dielectric strength: 1000 V RMS<br>Insulation resistance: $> 10^4$ M $\Omega$ | $\pm$ 3%                                      |
| Long Term Damp Heat                         | Temperature 40°C - RH 93 %<br>56 days   | $\pm$ 2%<br>Dielectric strength: 1000 V RMS<br>Insulation resistance: $> 10^4$ M $\Omega$ | $\pm$ 3%                                      |
| Thermal Shock                               | - 55°C to + 125°C - 5 cycles  | $\pm$ 1%  | $\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm 2\%$ |
| Rotational Life (Electrical and Mechanical) | 100 cycles - rated power  | $\pm$ 3%  |   |
| Shock                                       | MIL STD 202 Method 213/1<br>100 g - 6 ms<br>3 successive shocks in 3 directions                   | $\pm$ 1%  | $\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm 1\%$ |
| Vibration                                   | MIL STD 202 Method 204/D<br>20 g - 12 hours   | $\pm$ 1%  | $\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm 1\%$ |



| STANDARD RESISTANCE ELEMENT DATA   |  |   |  |                   |
|--|--|---|--|-------------------|
| STANDARD RESISTANCE VALUES   | LINEAR LAW   |   |  | T.C. -55°C +125°C |
|  | MAX. POWER AT 85°C   | MAX. WORKING VOLTAGE  | MAX. CUR. THROUGH ELEMENT  |                   |
| Ω  | W  | V   | mA   | ppm/°C            |
| 10<br>20<br>50   | 0.25   | 1.58<br>2.23<br>3.53  | 158<br>112<br>77   | 0<br>+ 200        |
| 100<br>200<br>500<br>1k<br>2k<br>5k<br>10k<br>20k<br>50k<br>100k<br>200k<br>500k<br>1M | ↓<br><br><br><br><br><br><br><br><br><br>0.2<br>0.08<br>0.04 | 5<br>7.07<br>11.2<br>15.8<br>22.3<br>35.3<br>50<br>70.7<br>112<br>158<br>200<br>200 | 50<br>35<br>22<br>15.8<br>11.2<br>7.1<br>5<br>3.5<br>2.2<br>1.6<br>1<br>0.4<br>0.2 | ± 100             |

**MARKING**

VISHAY trademark, ohmic value, manufacturing date.

The ohmic value is indicated by a 3 figure code, the first two digits are significant figures, the third one is the multiplier.

Example: 100 = 10Ω  
101 = 100Ω  
102 = 1000Ω  
503 = 50000Ω

**SOLDERING RECOMMENDATIONS**

Vapor phase: 215°C/20 to 40 seconds.


Reflow: 230°C/20 seconds.

Do not exceed peak 260°C


**PACKAGING**

In bulk (plastic box of 50 pieces).


On tape and reel on request, by 500 pieces for Z version, or 250 pieces for Y version.

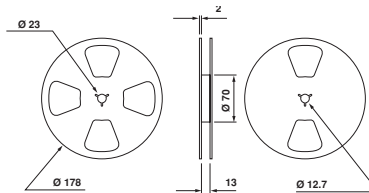

Version Y



Version Z



**ORDERING INFORMATION**

TSM4  
SERIES

YL  
STYLE


500KΩ  
OHMIC VALUE

± 10%  
TOLERANCE

BO50  
PACKAGING

On request BO50  
Version Z: code TR500  
Version Y: code TR250

**SAP PART NUMBERING GUIDELINES**

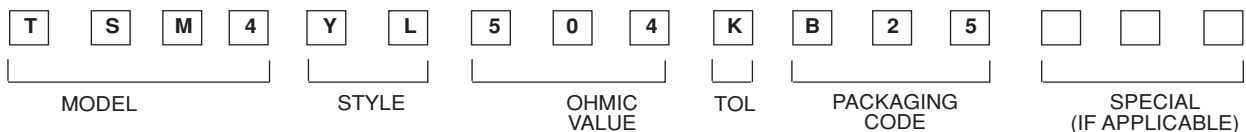

See the end of this data book for conversion tables