



ZTX1048A


NPN SILICON PLANAR MEDIUM POWER
HIGH GAIN TRANSISTOR

ZTX1048A

ISSUE 3 - FEBRUARY 1995

FEATURES


- * $V_{CEV}=50V$
 - * Very Low Saturation Voltages
 - * High Gain
 - * 20 Amps pulse current
- APPLICATIONS
- * LCD Backlight Convertors
 - * Emergency Lighting
 - * DC-DC Convertors




E-Line
TO92 Compatible

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	ZTX1048A	UNIT
Collector-Base Voltage	V_{CB0}	50	V
Collector-Emitter Voltage	V_{CE0}	17.5	V
Emitter-Base Voltage	V_{EB0}	5	V
Peak Pulse Current	I_{CM}	20	A
Continuous Collector Current	I_C	4	A
Base Current	I_B	500	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	1	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +200	$^{\circ}C$

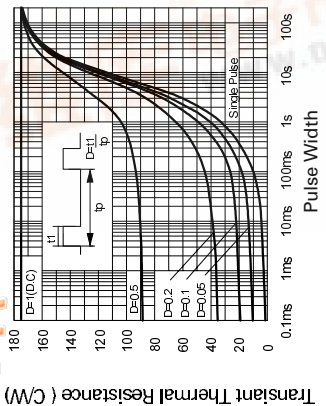

Transient Thermal Resistance

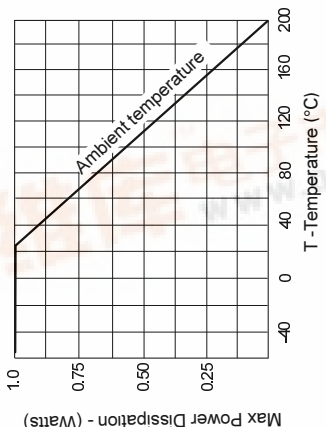

Derating curve

SPICE PARAMETERS

ZETEX ZTX1048A Spice model Last revision 20/01/95

MODEL ZTX1048A NPN IS=13.73E-13 NF=1.0 BF=550 IKF=8.0 VAF=120
ISE=2.6E-13 NE=1.38 NR=1.0 BR=300 IKR=6 VAR=15
ISC=1.6E-12 NC=1.4 RB=0.1 RE=0.022 RC=0.010
CJC=136E-12 CJE=559.1E-12 MJC=0.267 MJE=0.299
VJC=0.420 VJE=0.533 TF=600E-12 TR=3E-9

© 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.

ZETEX Zetex plc.
Fields New Road, Chadderton, Oldham, OL9 8NP, United Kingdom.
Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)
Facsimile: (44)161-627 5467

Zetex GmbH
Treilfeldstraße 19
81673 München
Tel: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 9

Zetex Inc.
87 Modular Avenue
Commack NY 11725
Tel: (516) 543-7100
Fax: (516) 864-7630

Zetex (Asia) Ltd.
3510 Metroplaza, Tower 2
Hing Fong Road, Kwai Fong
Tel: (852) 26100 611
Fax: (852) 24250 494

These are supported by agents and distributors in major countries world-wide
©Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.




捷多邦, 专业PCB打样工厂, 24小时加急出货

查询ZTX1048供应商

ELECTRICAL CHARACTERISTICS (at T_{amb} = 25°C unless otherwise stated).

PARAMETER	SYMBOL	ZTX1048A			CONDITIONS.
		MIN.	TYP.	MAX.	
Collector-Base Breakdown Voltage	V _{(BR)CBO}	50	85		I _C =100µA
Collector-Emitter Breakdown Voltage	V _{CES}	50	85		I _C =100µA
Collector-Emitter Breakdown Voltage	V _{CEO}	17.5	24		I _C =10mA
Collector-Emitter Breakdown Voltage	V _{CEV}	50	85		I _C =100µA, V _{EB} =1V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	5	8.7		I _E =100µA
Collector Cut-Off Current	I _{CBO}		0.3	10	V _{CB} =35V
Emitter Cut-Off Current	I _{EBO}		0.3	10	V _{EB} =4V
Collector Emitter Cut-Off Current	I _{CES}		0.3	10	V _{CES} =35V
Collector-Emitter Saturation Voltage	V _{CE(sat)}		27	45	I _C =0.5A, I _B =10mA*
			55	75	I _C =1A, I _B =10mA*
			110	150	I _C =2A, I _B =10mA*
			210	245	I _C =4A, I _B =20mA*
Base-Emitter Saturation Voltage	V _{BE(sat)}		860	950	I _C =4A, I _B =20mA*
Base-Emitter Turn-On Voltage	V _{BE(on)}		860	950	I _C =4A, V _{CE} =2V*
Static Forward Current Transfer Ratio	h _{FE}	280	440		I _C =10mA, V _{CE} =2V*
		300	450	1200	I _C =0.5A, V _{CE} =2V*
		300	450		I _C =1A, V _{CE} =2V*
		220	330		I _C =4A, V _{CE} =2V*
		50	80		I _C =20A, V _{CE} =2V*
Transition Frequency	f _T		150		I _C =50mA, V _{CE} =10V f=50MHz
Output Capacitance	C _{obo}		60	80	V _{CB} =10V, f=1MHz
Switching Times	t _{on}		130		I _C =4A, I _B =40mA, V _{CC} =10V
	t _{off}		180		I _C =4A, I _B =±40mA, V _{CC} =10V



Full characterised data now available

ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	ZTX1048A	UNIT
Collector-Base Voltage	V _{CBO}	50	V
Collector-Emitter Voltage	V _{CEO}	17.5	V
Emitter-Base Voltage	V _{EBO}	5	V
Peak Pulse Current	I _{CM}	20	A
Continuous Collector Current	I _C	4	A
Base Current	I _B	500	mA
Power Dissipation at T _{amb} =25°C	P _{tot}	1	W
Operating and Storage Temperature Range	T _j ; T _{stg}	-55 to +200	°C

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	50	85		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CES}	50	85		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CEO}	17.5	24		V	$I_C = 10\text{mA}$
Collector-Emitter Breakdown Voltage	V_{CEV}	50	85		V	$I_C = 100\mu\text{A}$, $V_{EB} = 1\text{V}$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5	8.7		V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}		0.3	10	nA	$V_{CB} = 35\text{V}$
Emitter Cut-Off Current	I_{EBO}		0.3	10	nA	$V_{EB} = 4\text{V}$
Collector Emitter Cut-Off Current	I_{CES}		0.3	10	nA	$V_{CES} = 35\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		27	45	mV	$I_C = 0.5\text{A}$, $I_B = 10\text{mA}^*$
			55	75	mV	$I_C = 1\text{A}$, $I_B = 10\text{mA}^*$
			110	150	mV	$I_C = 2\text{A}$, $I_B = 10\text{mA}^*$
			210	245	mV	$I_C = 4\text{A}$, $I_B = 20\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		860	950	mV	$I_C = 4\text{A}$, $I_B = 20\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		860	950	mV	$I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	280	440			$I_C = 10\text{mA}$, $V_{CE} = 2\text{V}^*$
		300	450			$I_C = 0.5\text{A}$, $V_{CE} = 2\text{V}^*$
		300	450	1200		$I_C = 1\text{A}$, $V_{CE} = 2\text{V}^*$
		220	330			$I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$
Transition Frequency	f_T		150		MHz	$I_C = 50\text{mA}$, $V_{CE} = 10\text{V}$ $f = 50\text{MHz}$
Output Capacitance	C_{obo}		60	80	pF	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$
Switching Times	t_{on}		120		ns	$I_C = 4\text{A}$, $I_B = 40\text{mA}$, $V_{CC} = 10\text{V}$
	t_{off}		250		ns	$I_C = 4\text{A}$, $I_B = \pm 40\text{mA}$, $V_{CC} = 10\text{V}$

Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

TYPICAL CHARACTERISTICS

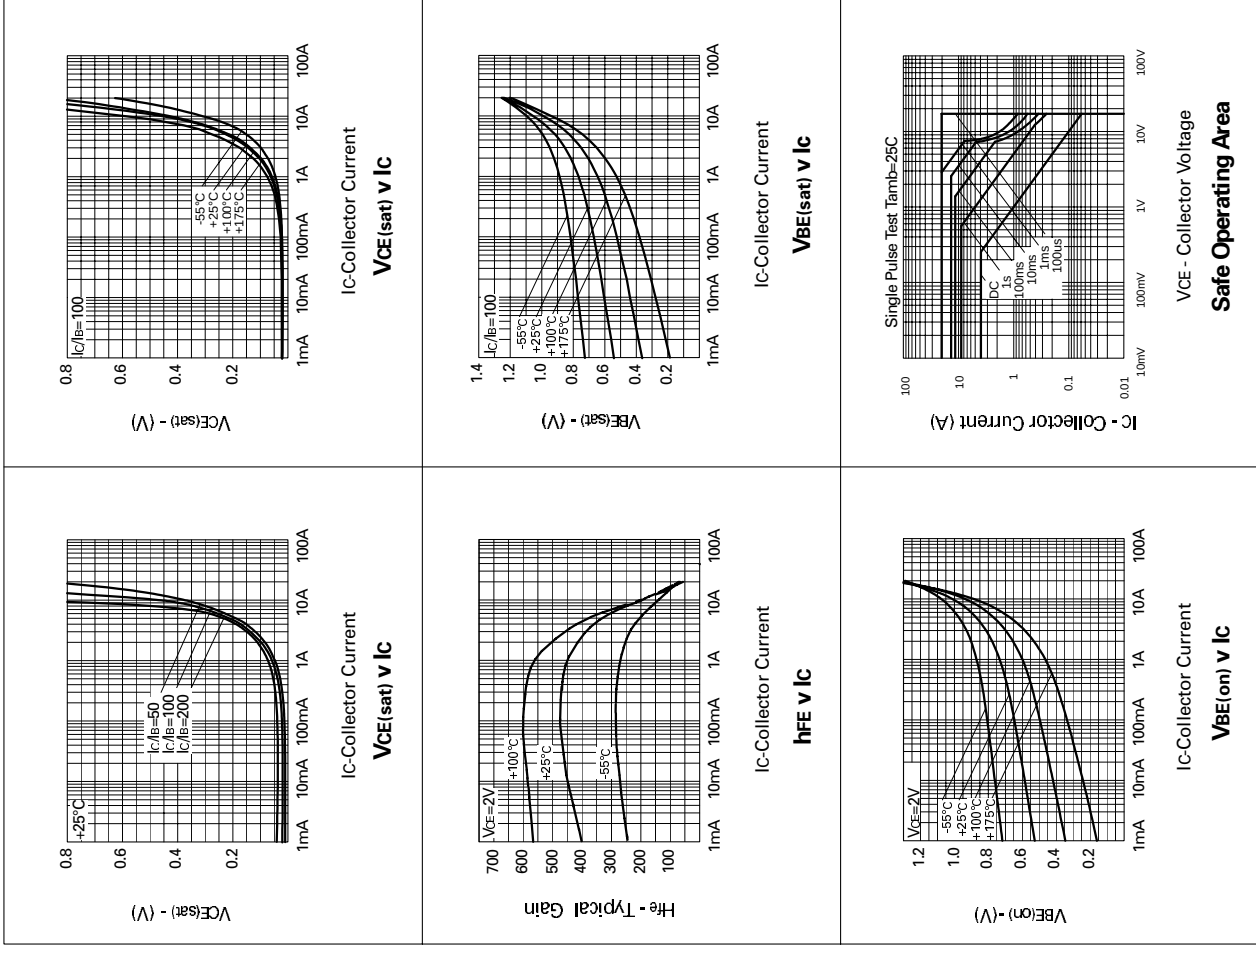

ZTX1048A

NPN SILICON PLANAR MEDIUM POWER
HIGH GAIN TRANSISTOR

ZTX1048A


ISSUE 3 – FEBRUARY 1995

FEATURES

- * $V_{CEV}=50V$
- * Very Low Saturation Voltages
- * High Gain
- * 20 Amps pulse current


APPLICATIONS

- * LCD Backlight Convertors
- * Emergency Lighting
- * DC-DC Convertors



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	ZTX1048A	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	17.5	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	20	A
Continuous Collector Current	I_C	4	A
Base Current	I_B	500	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	1	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +200	$^{\circ}C$

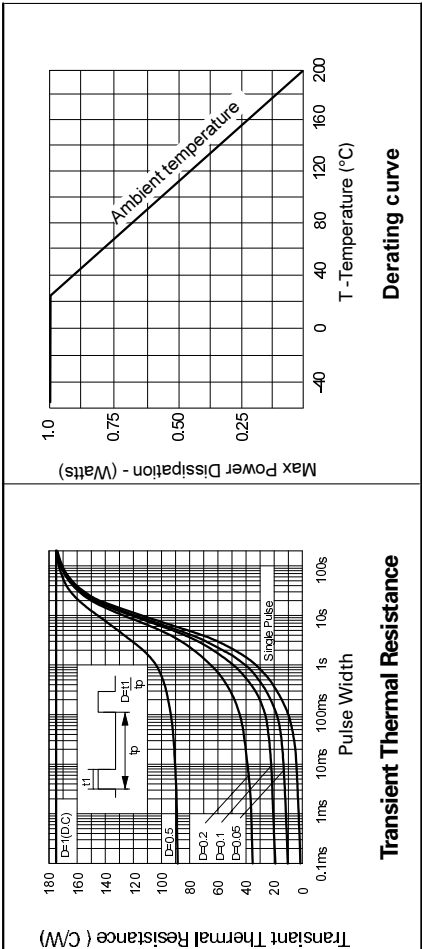

SPICE PARAMETERS

ZETEX ZTX1048A Spice model Last revision 20/01/95

MODEL ZTX1048A NPN IS=13.73E-13 NF=1.0 BF=550 IKF=8.0 VAF=120
ISE=2.6E-13 NE=1.38 NR=1.0 BR=300 IKR=6 VAR=15
ISC=1.6E-12 NC=1.4 RB=0.1 RE=0.022 RC=0.010
CJC=136E-12 CJE=559.1E-12 MJC=0.267 MJE=0.299
VJC=0.420 VJE=0.533 TF=600E-12 TR=3E-9

© 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.

ZETEX Zetex GmbH Treitfeldstraße 19 D-81673 München Telephone: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49	ZETEX Zetex Inc. 87 Modular Avenue Commack NY 11725 Telephone: (516) 543-7100 Fax: (516) 864-7630	ZETEX Zetex (Asia) Ltd. 3510 Metroplaza, Tower 2 Hing Fong Road, Kwai Fong Telephone: (852) 26100 611 Fax: (852) 24250 494
--	---	--

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

