

Series 35000X

SOIC & SOJ to DIP Adapters

FEATURES:

- A cost effective means of upgrading to SOJ or SOIC...without changing your PCB layout.
- Available on .300 [7.62] centers. Consult Data Sheet No. 18011 for adapters on .400 [10.16], or .600 [15.24] centers.

SPECIFICATIONS:

- Board material is .062 thick FR-4 with 1 oz. Copper traces, both sides.
- Pins are Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Pin plating is 200μ [5.08μm] min.93/7 Tin/Lead per MIL-P-81728 over 100μ [2.54μm] min. Nickel per QQ-N-290.
- Operating temperature=221°F [105°C].

MOUNTING CONSIDERATIONS:


- Suggested PCB hole size=.028 ± .003 [.71 ± .08]. dia.

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13]
unless otherwise specified

"A"=NO. OF PINS PER ROW X .100 [2.54]

"D"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

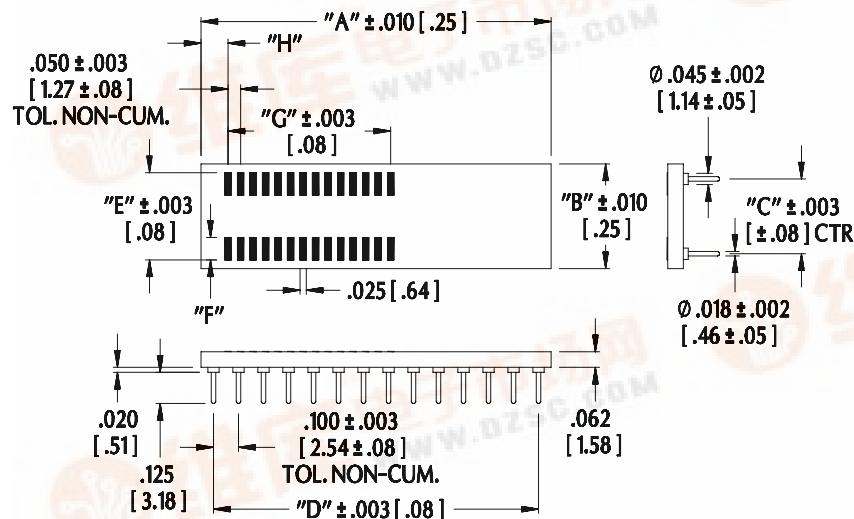

ORDERING INFORMATION

See table for
part numbers



Part No. 20-350001-10
Board pad layout - top view

Available in panelized form
with or without customer
supplied devices mounted.
Consult factory.

Part No.	Pins	Type	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
08-350000-10	8	SOIC	.460 [11.68]	.300 [7.62]	.455 [11.56]	.155 [3.94]	.150 [3.81]	.121 [3.07]
14-350000-10	14	SOIC	.450 [11.43]	.300 [7.62]	.420 [10.67]	.138 [3.51]	.300 [7.62]	.180 [4.57]
16-350000-10	16	SOIC	.450 [11.43]	.300 [7.62]	.420 [10.67]	.138 [3.51]	.350 [8.89]	.180 [4.57]
18-350000-10	18	SOIC	.450 [11.43]	.300 [7.62]	.420 [10.67]	.138 [3.51]	.400 [10.16]	.180 [4.57]
20-350000-10	20	SOIC	.450 [11.43]	.300 [7.62]	.420 [10.67]	.138 [3.51]	.450 [11.43]	.180 [4.57]
24-350000-10	24	SOIC	.450 [11.43]	.300 [7.62]	.420 [10.67]	.138 [3.51]	.550 [13.97]	.180 [4.57]
20-350001-10	20	SOJ	.420 [10.67]	.300 [7.62]	.350 [8.89]	.090 [2.29]	.600 [15.24]	.060 [1.52]
28-350002-10	28	SOIC	.400 [10.16]	.300 [7.62]	.350 [8.89]	.090 [2.29]	.650 [16.51]	.375 [9.53]

ARIES
ELECTRONICS, INC.
http://www.arieselec.com • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



UK/IRELAND/GB
TEL: +44 870 240 0249
FAX: +44 1653 600493
uking@arieselec.com

EUROPE/MAINLAND/HOLLAND
TEL: +31 78 615 94 65
FAX: +31 78 615 43 11
europe@arieselec.com

18010
REV.D

