

FEATURES AND SPECIFICATIONS

- Features and Benefits**
- Positive latching to mating headers or plugs
 - Fully isolated contacts
 - Fully polarized to mating headers and plugs
 - Integral pull tabs for ease in unmating

Reference Information
 Product Specification: PS-43650
 Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 TUV License No.: R95107
 Mates With: 43640 and 43650
 Use With: 43030
 Designed In: Millimeters

Physical
 Housing: Polyester, UL 94V-0
 Contact: Phosphor Bronze
 Plating: Tin or Gold

3.00mm (.118") Pitch






Micro-Fit 3.0™

Wire-to-Wire

Receptacle

43645

Single Row

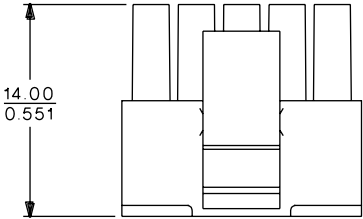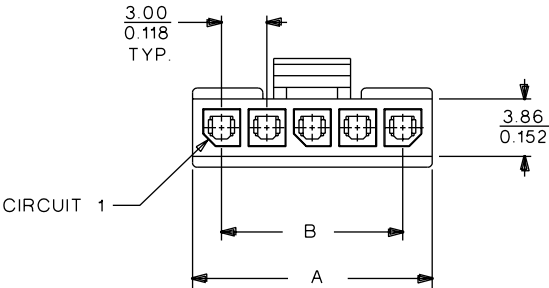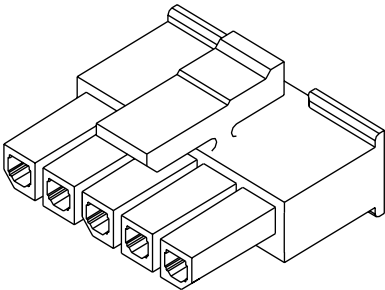

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	43645-0200	6.85 (.270)	3.00 (.118)
3	43645-0300	9.85 (.388)	6.00 (.236)
4	43645-0400	12.85 (.506)	9.00 (.354)
5	43645-0500	15.85 (.624)	12.00 (.472)
6	43645-0600	18.85 (.742)	15.00 (.591)
7	43645-0700	21.85 (.860)	18.00 (.709)
8	43645-0800	24.85 (.978)	21.00 (.827)
9	43645-0900	27.85 (1.096)	24.00 (.945)
10	43645-1000	30.85 (1.215)	27.00 (1.063)
11	43645-1100	33.85 (1.333)	30.00 (1.181)
12	43645-1200	36.85 (1.457)	33.00 (1.299)