

59060 Stainless Steel Threaded Barrel Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Stainless steel threaded barrel with retaining nuts
- M8 thread
- Choice of normally open or high voltage contacts
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- Robust construction makes this sensor well suited to harsh industrial environments
- Simple installation and adjustment using supplied retaining nuts
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium

Applications

- Position and limit
- Security systems
- Linear actuator
- Industrial process control

DIMENSIONS (in) mm

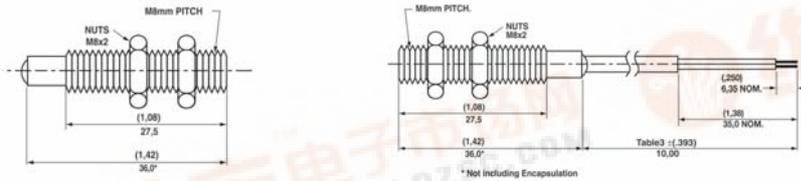

SCHEMATICS	Switch Type
	1 & 2
	3
	4

CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Contact Type			1	2	3	4
Switch Type	Power	Watt - max.	10	10	5	5
Voltage	Switching	Vdc - max.	200	300	175	175
	Breakdown	Vdc - min.	250	450	200	200
Current	Switching	A - max.	0.5	0.5	0.25	0.25
	Carry	A - max.	1.2	1.5	1.5	1.5
Resistance	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
	Insulation	Ω - min.	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>7</sup>	10 <sup>7</sup>
Capacitance	Contact	pF - typ.	0.3	0.2	0.3	0.3
	Temperature	Operating	°C	-40 to +105	-20 to +105	-40 to +105
Time	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
	Operate	ms - max.	1.0	1.0	3.0	3.0
Shock	Release	ms - max.	1.0	1.0	3.0	3.0
	11ms 1/2 sine	G - max.	100	100	50	50
Vibration	50-2000 Hz	G - max.	30	30	30	30

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2							TABLE 3		TABLE 4	
<p><b>Sensitivity Options:-</b> Activate Distances are approximate using Hamlin 57060 actuator as illustrated Switch AT before modification</p>							<p><b>Cable Type:-</b> 24 AWG 7/32 PVC 105°C DOUBLE INSULATED</p> <p>Standard Lengths</p>		<p><b>Termination Options:-</b></p>	
<b>Select Option</b>	<b>S</b>	<b>T</b>	<b>U</b>	<b>V</b>	<b>SELECT OPTION</b>	<b>CABLE LENGTH (in) mm</b>	<b>SELECT OPTION</b>	<b>DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED)</b>		
<b>Switch Type</b>	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm				
1 Normally Open	12-18	(472)	17-23	(354)	22-28	(276)	01	(3,94) 100		
2 High Voltage		12,0		9,0		7,0	02	(11,81) 300		
3 Change Over		(413)		(295)		(236)	03	(19,69) 500		
4 Normally Closed	15-20	10,5	20-25	7,5	25-30	6,0	04	(29,53) 750		
							05	(39,37) 1000		
							C	6.35mm fastons		

ORDERING INFORMATION

N.B. 57060 actuator sold separately



Series 59060

Switch Type

Sensitivity

Cable Length

Termination

Table 1

Table 2

Table 3

Table 4

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
 Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com  
 Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com  
 Hamectrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.



**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**