

DATA SHEET

TN23/14/7 Ferrite toroids

Supersedes data of September 2004

2008 Sep 01



FERROXCUBE
A YAGEO COMPANY



RING CORES (TOROIDS)

Effective core parameters


SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	1.81	mm^{-1}
V_e	effective volume	1722	mm^3
l_e	effective length	55.8	mm
A_e	effective area	30.9	mm^2
m	mass of core	≈ 8.4	g

Coating

The cores are coated with polyamide 11 (PA11), flame retardant in accordance with "UL 94V-2"; UL file number E 45228 (M).
The colour is white.
Maximum operating temperature is 160 °C.

Isolation voltage

DC isolation voltage: 2000 V.
Contacts are applied on the edge of the ring core, which is also the critical point for the winding operation.

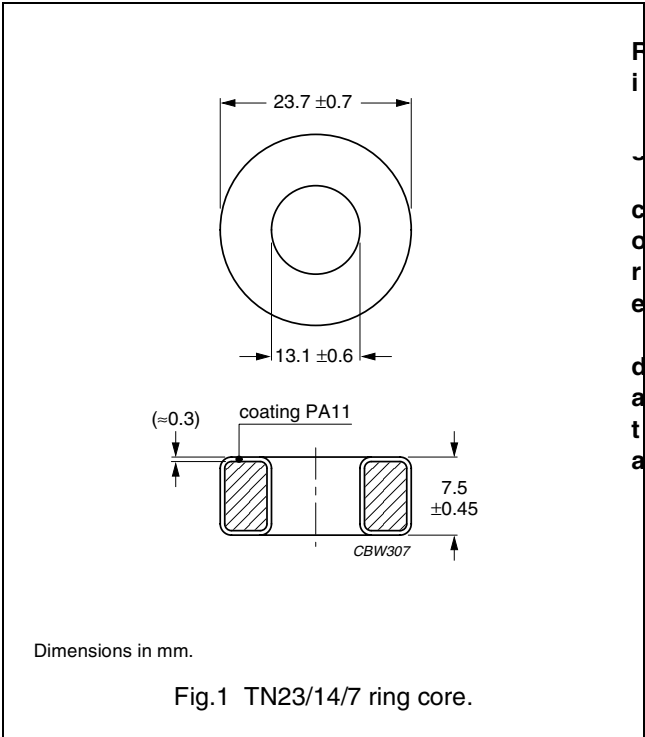

GRADE	A_L (nH)	μ_i	TYPE NUMBER
4C65	$87 \pm 25\%$	≈ 125	TN23/14/7-4C65
4A11	$486 \pm 25\%$	$\approx 700^{(1)}$	TN23/14/7-4A11
3R1 ⁽²⁾	—	≈ 800	TN23/14/7-3R1
3F3	$1250 \pm 25\%$	≈ 1800	TN23/14/7-3F3
3C90	$1600 \pm 25\%$	≈ 2300	TN23/14/7-3C90
3C11 des	$3000 \pm 25\%$	≈ 4300	TN23/14/7-3C11
3E25	$3820 \pm 25\%$	≈ 5500	TN23/14/7-3E25

- 1. Old permeability specification maintained.
- 2. Due to the rectangular BH-loop of 3R1, inductance values strongly depend on the magnetic state of the ring core and measuring conditions. Therefore no A_L value is specified. For the application in magnetic amplifiers A_L is not a critical parameter.

WARNING

Do not use 3R1 cores close to their mechanical resonant frequency. For more information refer to "3R1" material specification in this data handbook.

Ferrite toroids

TN23/14/7

Properties of cores under power conditions

GRADE	B (mT) at	CORE LOSS (W) at		
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B = 200 mT; T = 100 °C	f = 100 kHz; B = 100 mT; T = 100 °C	f = 400 kHz; B = 50 mT; T = 100 °C
3C90	≥320	≤ 0.19	≤ 0.19	
3F3	≥320		≤ 0.19	≤ 0.33

Ferrite toroids

TN23/14/7

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn