

[查询"508-930-22"供应商](#)

● PROFESSIONAL LED INDICATORS Ø8.1mm Mounting



### 508 SERIES

PACK QUANTITY = 10 PIECES

### FEATURES

- Bright nickel plated brass housing
- Low profile styling
- Sealed to IP67
- Domed lens available
- Suitable for high vibration applications
- Internal reverse protection diode fitted as standard in all voltage models.

### SPECIFICATION

Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC (Vdc) Vopr	CURRENT DC (mA) Iopr	LUMINOUS INTENSITY Iv@20mA (mcd)	WAVE LENGTH λp (nm)	OPERATING TEMP Topr	STORAGE TEMP Tstg	
<b>HIGH INTENSITY</b>									
508-501-21	Red	Smoked	12	19	11000	643	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-521-21	Yellow	Smoked	12	19	16000	591	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-532-21	Green	Smoked	12	20	23000	527	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-930-21	Blue	Smoked	12	20	7000	470	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-997-21	Cool White	Smoked	12	20	14000	*see below	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-501-23	Red	Smoked	24-28	20	11000	643	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-521-23	Yellow	Smoked	24-28	20	16000	591	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-532-23	Green	Smoked	24-28	20	23000	527	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-930-23	Blue	Smoked	24-28	20	7000	470	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
508-997-23	Cool White	Smoked	24-28	20	14000	*see below	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>	<b>°C</b>	<b>°C</b>	



Other voltages AC/DC available. Please contact our Technical Sales.

<sup>^</sup> = Products must be derated according to the derating information. Each derating graph refers to specific LEDs.

997F-C	*Typical emission colour cool white			
x	0.245	0.361	0.356	0.264
y	0.229	0.385	0.351	0.220

Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

#### How to Order:

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •

• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.




BS EN ISO 9001:2000  
Approved Manufacturer



查询"508-930-22"供应商

### 508 Series

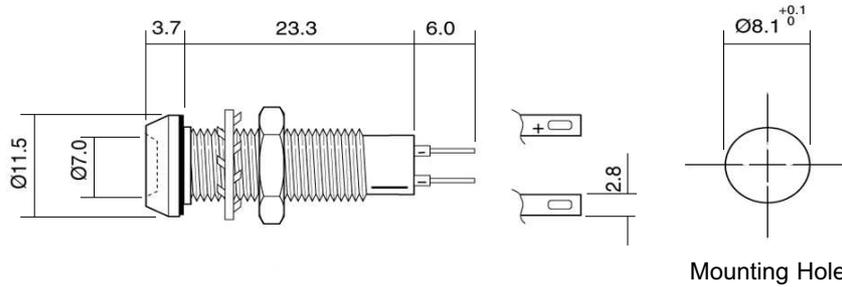


Dimensions in mm (Typical)  
Not to scale

Anode termination indicated by red sleeve  
Mounting hole to be clean and burr free

#### MATERIALS

Body	Brass to BS 2874 CZ121 Nickel plated to BS 1224
Nut	Brass to BS 2874 CZ121 nickel plated to BS 1224
Panel Seal	Viton
Termination	Brass to BS 2874 CZ108 Copper flash undercoat with silver flash finish
Lock Washer	Zinc plated steel
Fresnel lens	Polycarbonate
Encapsulation	PC5430 resin

#### PUSH-ON CONNECTORS



925-000-00 is brass tin plated.  
For use with 508 series lamps.

Dimensions in mm (Typical)  
Not to scale

#### TECHNICAL CHARACTERISTICS

SERIES	MAXIMUM POWER DISSIPATION	MAXIMUM REVERSE VOLTAGE	PANEL CUTOUT	NUT MOUNTING TORQUE	MINIMUM MOUNTING CENTRES	MIN/MAX. PANEL THICKNESS
508	700	3* / 1000•	8.1	0.65	x,y=14.5	1.5-13.0
	mw	Vdc	mm	Nm	mm	mm

\* = current version

• = voltage version

#### OPTIONAL FLYING LEAD TERMINATIONS

ORDER CODE SUFFIX	SUPPLY VOLTAGE	WIRE COLOUR	WIRE LENGTH	NO/DIAMETER OF CONDUCTORS	DIAMETER OVER INSULATION	COMMENTS
15	DC Products	Red-anode / Black-cathode	150mm	19/0.15mm	1.2mm	Customised lengths available
15	AC Products	Brown-live / Blue-neutral	150mm			
19	DC Products	Red-anode / Black-cathode	1000mm			
19	AC Products	Brown-live / Blue-neutral	1000mm			

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •



• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000  
Approved Manufacturer

**DERATING INFORMATION**

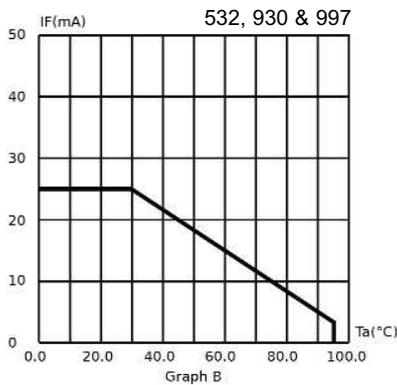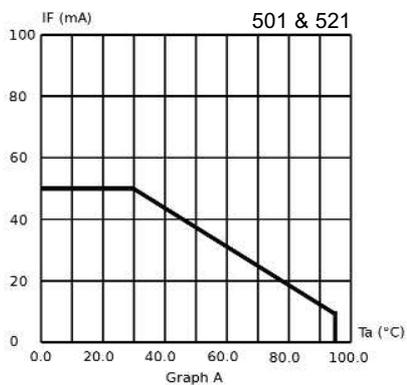

**ALSO AVAILABLE**

Part numbers also available in the 508 Series:

PART NO.	COLOUR	VOLTAGE DC (Vdc) Vopr
508-501-04	Red	20mA
508-501-20	Red	5/6 Vdc
508-501-22	Red	24 Vdc
508-502-21-29	Red	12 Vdc
508-502-75	Red	110 Vac
508-521-04	Yellow	20mA
508-521-21-29	Yellow	12 Vdc
508-521-22	Yellow	24 Vdc
508-521-75	Yellow	110 Vac
508-532-04	Green	20mA
508-532-20	Green	5/6 Vdc
508-532-22	Green	24 Vdc
508-532-22-15	Green	24 Vdc
508-532-22-50	Green	24 Vdc
508-532-22-51	Green	24 Vdc
508-930-22	Blue	24 Vdc
508-997-04	White	20mA
508-997-22	White	24 Vdc
UNITS		

The products listed above illustrate all of the options available to order. These products may have custom modifications that alter their operation beyond the generic information contained within this datasheet. Please contact sales for further information.

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •

• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000  
Approved Manufacturer