

LED displays

High efficiency, three-digit numeric displays


LB-303AK Series

The LB-303AK series were designed to meet the need for multi-digit numeric displays. These LED numeric displays use GaAsP on GaP for the emitting material (with the exception of green) and are housed in an epoxy resin package. They are three-digit displays with a character height of 8.0 mm.

●Features

- 1) Height of character : 8.0 mm
- 2) High efficiency in a compact package.
- 3) Common anode and common cathode configurations are available for red, orange and green.
- 4) The package surface is painted black and the segments are colored the display color.

●Dimensions (Unit : mm)

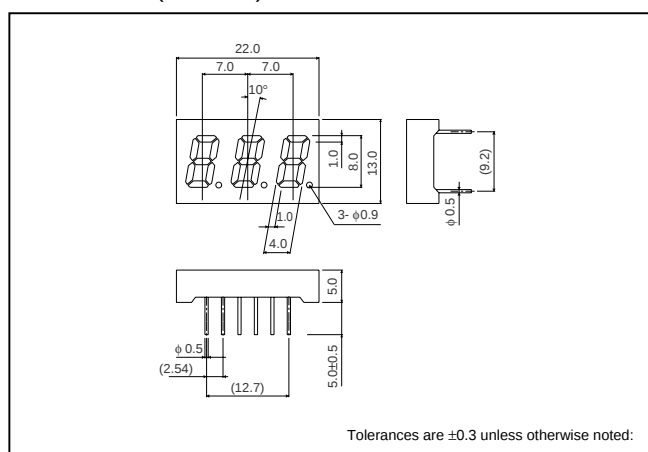


●Selection guide

Emitting color	Red	Orange	Green
Common			
Anode	LB-303VA	LB-303DA*	LB-303MA
Cathode	LB-303VK	LB-303DK*	LB-303MK

*Order-based production.


●Pin assignments

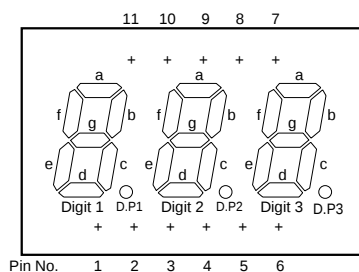

Pin No.	Function
1	Segment "c"
2	Digit 1 Common
3	Segment "d"
4	Digit 2 Common
5	Digit 3 Common
6	Segment D.P
7	Segment "b"
8	Segment "f"
9	Segment "a"
10	Segment "e"
11	Segment "g"

LED displays

●Internal circuit schematic (example of common anode)

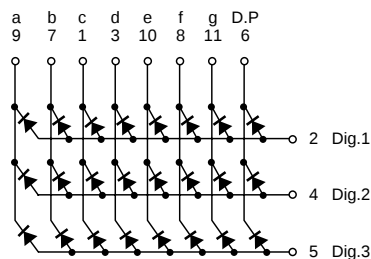

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Orange	Green	Unit
		LB-303VA / VK	LB-303DA / DK	LB-303MA / MK	
Power dissipation	P_D	960	960	1440	mW
Power dissipation	P_D / seg	40	40	60	mW
Forward current	I_F	15	15	20	mA
Peak forward current	I_{FP}	60*	60*	60*	mA
Reverse voltage	V_R	3	3	3	V
Operating temperature	T_{opr}	-25 to +75			°C
Storage temperature	T_{stg}	-30 to +85			°C

* Pulse width 1ms duty 1 / 5

●Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Orange			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 10\text{mA}$	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	V
Reverse current	I_R	$V_R = 3\text{V}$	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	650	—	—	610	—	—	563	—	nm
Spectral line half width	$\Delta\lambda$	$I_F = 10\text{mA}$	—	40	—	—	40	—	—	40	—	nm

© Not designed for radiation resistance.

●Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	LB-303VA	1.4	4.0	—	mcd
		LB-303VK				
Orange	610	LB-303DA	1.4	4.0	—	mcd
		LB-303DK				
Green	563	LB-303MA	2.2	6.3	—	mcd
		LB-303MK				

 Note : Measured at $I_F = 10\text{mA}$

Appendix

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.