

storm[®]

1000 Series

查询"1K12T101"供应商

Attack resistant keypads for use in hostile outdoor environments.

A range of attack resistant keypads for use in the most demanding public or outdoor environments. Typical applications include payphones, security and access control systems, cash and ticket dispensing machines and interactive public information systems.


Part No.s

1K0421 (F1-F4)

1K0421 (← ↓ ↑ →)

1K12T1 (Tel. Format)
1K1201 (Calc. Format)

1K16T1 (Tel. Format)
1K1601 (Calc. Format)

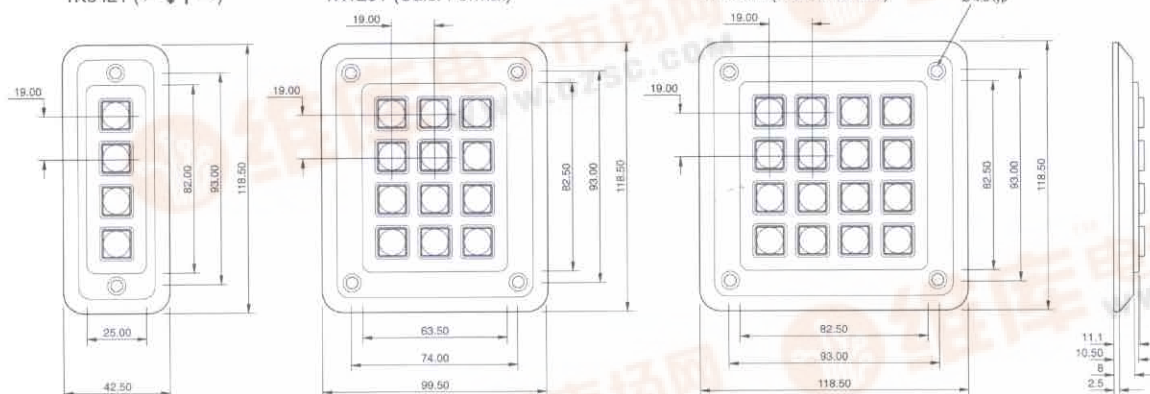

VANDAL RESISTANT

IMPACT RESISTANT

IP67 SEALED


OPERATIONS PER KEY

RESPONSIVE KEY ACTION

ESD PROTECTED

CE COMPLIANT

MOUNTING & CONNECTION DETAILS

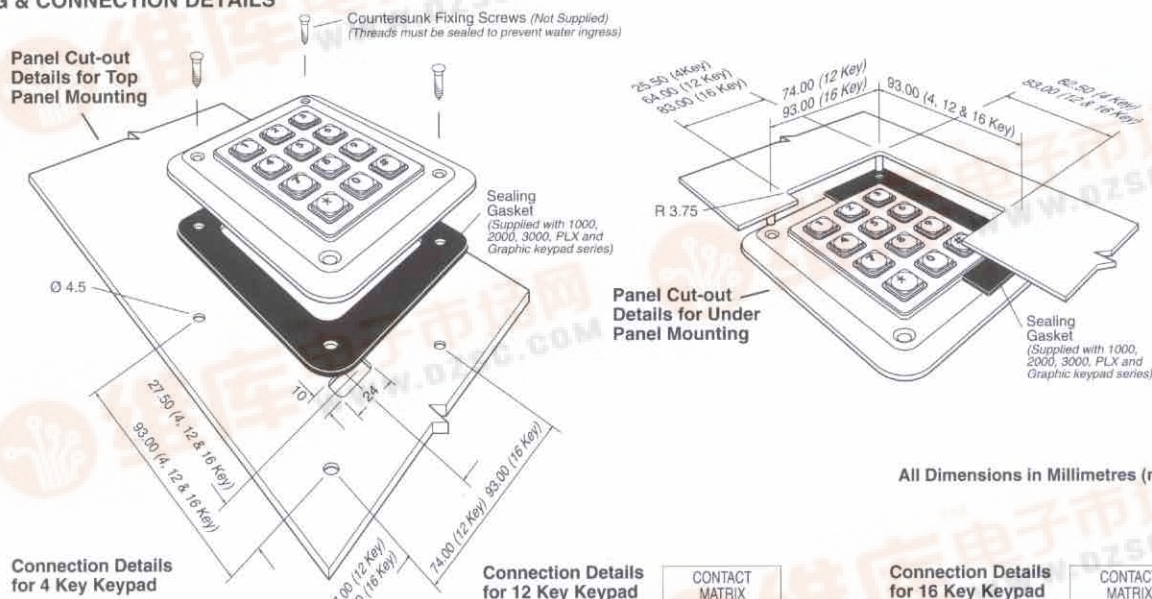

All Dimensions in Millimetres (mm).

Connection Details for 4 Key Keypad

CONTACT CONNECTIONS
5 4 3 2 1
(As viewed from rear of keypad)

A 1
B
C
D

KEY LOCATION
(As viewed from front of keypad)

CONN. PIN	ROW/COLUMN
1	common
2	D
3	C
4	B
5	A

Connection Details for 12 Key Keypad

CONTACT CONNECTIONS
8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

A 1 2 3
B
C
D

KEY LOCATION
(As viewed from front of keypad)

CONN. PIN	ROW/COLUMN
1	A
2	B
3	1
4	2
5	3
6	-
7	D
8	C

Connection Details for 16 Key Keypad

CONTACT CONNECTIONS
8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

A 1 2 3 4
B
C
D

KEY LOCATION
(As viewed from front of keypad)

CONN. PIN	ROW/COLUMN
1	A
2	B
3	1
4	2
5	3
6	4
7	D
8	C

ELECTRICAL

Contact Bounce 5ms (max)
Contact Resistance 100 ohms (max)
Insulation Resistance 50 Mohms (min)
Breakdown Voltage 500V AC (max 60 secs.)
Operating Voltage 24V DC (max)
Operating Current 50mA (max)

ENVIRONMENTAL

Water / Dust Sealed IP67 (when mounted to suitable enclosure)
Operational Temperature -40°C to +100°C (Dry)
Impact 20 Joules via 50mm Ø steel impactor

MECHANICAL

Operational Life 4 million cycles (min) per key
Keypad Travel 1.4mm nominal
Actuation Force 180gms nominal
Connector 0.1" pitch, gold plated square pin, male connector with locking ramp

MATERIAL

Casing & Keytops Chromed die-cast zinc
Keytops Legends Engraved
Contact Circuit Gold on Nickel plated FR4

Whilst every effort is made to ensure details are correct at time of production, specifications are subject to change without notice.

100-LIT-01
Issue 2 - Feb 99

STORM IS A TRADEMARK OF
KEYMAT TECHNOLOGY LTD.

Web Site: www.keymat.com
E-Mail: sales@keymat.com



FM 39602

KEYMAT
TECHNOLOGY
LTD

14 Bentinck Court Bentinck Road
West Drayton UB7 7RQ England
Telephone: +44/(0)1895 431421
Telefax: +44/(0)1895 431132

USA Office:

MGR
INDUSTRIES

450-B Industrial Drive, Fort Collins, CO 80524
Tel: 970-221 2201 Fax: 970-484 4078



Anti-vandal keypads for hostile outdoor environments



VANDAL RESISTANT



IMPACT RESISTANT



IP67 SEALED



>4 Million

OPERATIONS PER KEY



RESPONSIVE KEY ACTION



ESD PROTECTED



CE COMPLIANT

Attack resistant
keypads designed
to ensure reliable
and responsive
operation in the
most demanding
public applications.

storm[®]
1000 Series

Keymat Technology Ltd., 14 Bentinck Court,
Bentinck Road, West Drayton, Middlesex UB7 7RQ. England
Tel: +44 (0)1895 431421 Fax: +44 (0)1895 431132
E-Mail: sales@keymat.com

Web Site: www.keymat.com