

732 400

查询"52N12T044(225/175)"供应商



Automatic Reset

Quick Action Bimetallic Disc Thermostats

General Specification

Item	Description				
1 Basic Features	1/2" Disc Insulated Thermostat, SPST				
2 Operation	A: Open on temperature rise B: Close on temperature rise				
3 Temperature Range	-10°C to 100°C	100°C to 130°C	130°C to 180°C	180°C to 210°C	210°C to 250°C
4 Tolerance	4°C	5°C	6°C	8°C	12°C
5 Differential	15°C	25°C	30°C	40°C	50°C
6 Calibration Method	1C/min. Air circulation furnace with a signal current load				
7 Insulation Resistance	More than 1,000 MΩ at DC 500 V with Megger				
8 Dielectric Strength	AC 1,500 V for one minute or AC 1,800 V for one second				
9 Contact Resistance	Less than 30 milliohms				




Type 03, 54 (Phenolic)



Type 52 (Ceramic Body)

Phenolic Thermostats: Temperature up to 150°C

Type No.	Feature	Electrical Rating			
03EP	Micro Current	250VAC/30VAC	0.1A	Resistive	100M cycles
11N	Low Profile	125VAC/250VAC	15A/10A	Resistive	100M cycles
50N	Clip-on Mounting	125VAC/250VAC	15A/10A	Resistive	100M cycles
11S	Low Profile	125VAC/250VAC	6A/3A	Resistive	100M cycles
50S	Clip-on Mounting	125VAC/250VAC	6A/3A	Resistive	100M cycles
54N	General Purpose	120VAC/240VAC	15A/10A	Resistive/Inductive	100M cycles

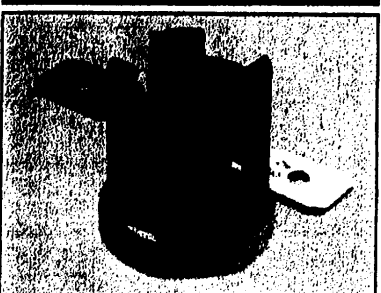

Type 50 (Phenolic), 09 (Ceramic)


Ceramic High Temperature Thermostats

Type No.	Feature	Electrical Rating			
09N	Clip-on Mounting	125VAC/250VAC	15A/10A	Resistive	100M cycles
10N	Clip-on Mounting	125VAC/250VAC	15A/10A	Resistive	100M cycles
2N	General Purpose	125VAC/250VAC	15A/10A	Resistive	100M cycles
52N•	General Purpose	125VAC/250VAC	15A/10A	Inductive•	6M cycles



Type 11 (Phenolic), 10 (Ceramic)

Structure: Automatic Reset

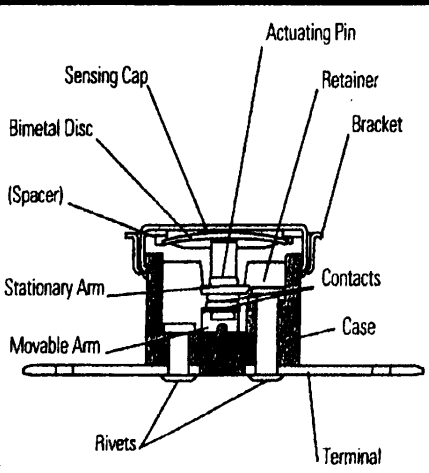


Dimensions: Automatic Reset

Type 03, 52, 54		Type 50, 09	Type 10, 11
(Fixed Bracket)	(Flange Bracket)	(Clip-on)	(Loose Bracket)
11.5, 12, 1/4" Quick Connect, M3, 16, 34, 24, 31	16, 12, 3/16" Quick Connect, M3, 20, 30, 24, 32	16, 12, 14.5, 3/16" Quick Connect, 30	16, 9, 1/4" Quick Connect, M3, 34, 24.5



Thermostat Part Number Key/Variation Chart

Our Designation of Type-Code

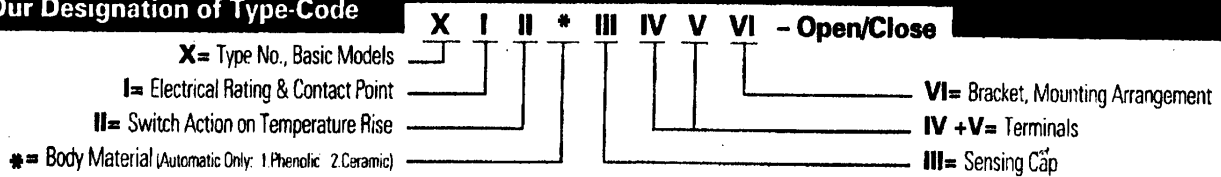


N	AC 120V/AC 240V 15A/10A	: Standard Contact Point
S	AC 120V/AC 250V 6A/3A	: For Short Body
X	AC 120V/DC 30V 10M-1A	: Cross-Bar Contact Point
P	AC 120V/DC 6-30V 10M-100mA	: Cross-Bar Contact Point

1	Open on rise (operation type A)
3	Close on rise (operation type B)
4	Open on rise: one time operation

0, 1, 4, T, W	Aluminum	No. 0	No. 1,2,3	No. 4,5	No. 6	No. 7	No. A	No. P	No. S	No. T,U,V	No. W
2, 7, S, U	Copper Alloy										
3, 5, 6, A, P, V	Stainless Steel										
0, 1, 2, 3, A, P, W	Fits w/Bracket #...										
0	Open Cap										
T, U, V	Close On Rise (Operation Type B)										
S	Screw Threads (6-32, 8-32UNC)										
7, P	Tube Mounting										

No. 01 Solder	No. 02 Solder	No. 05 .187 Quick Connect	No. 06/10 .187 Quick Connect	No. 07 Strap
No. 08 Weld	No. 11 Strap	No. 12 Crimp	No. 14 .187 Quick Connect	No. 27 Tube
No. 28 Strap	No. 36 .187 Quick Connect	No. 43 .250 Quick Connect	No. 44 .250 Quick Connect	

0	No Bracket
B, E, H	Fixed Bracket
1, 2, 3, 4, A	Loose Bracket
E, A (With Spring)	Tube Mounting

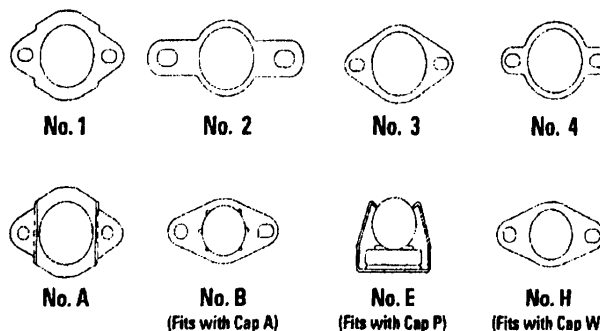

MICROTHERM LIMITED

Merrow Business Centre Merrow Lane Guildford Surrey GU4 7WA
 Telephone 0483 450100