


ENERGIZER NO. 1222



Industry Standard Dimensions in mm (inches)

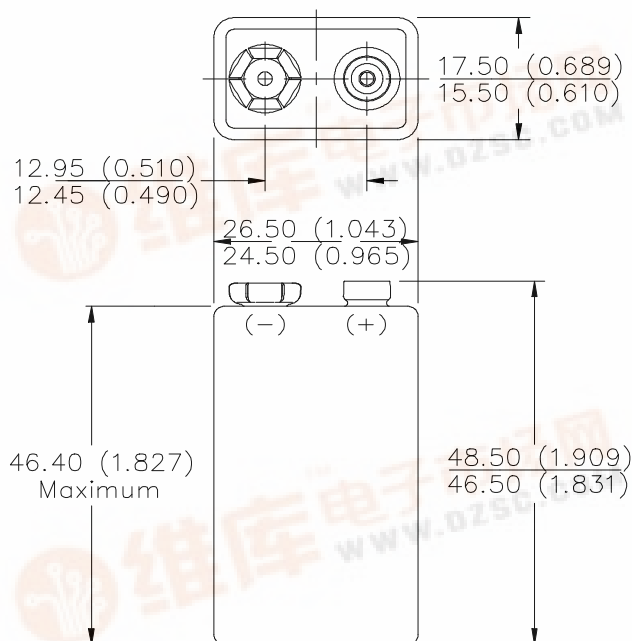


9V


SUPER HEAVY DUTY

Chemical System:	Leclanche Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-1604D, IEC-6F22
Battery Voltage:	9.0 Volts
Operating Temp:	-5°C to 55°C (20°F to 130°F)
Average Weight:	37.0 grams (1.3 oz.)
Volume:	20.3 cubic centimeters (1.2 cubic inch)
Average Capacity:	400 mAh to 0.8 volts per cell (Rated capacity at 5 mA continuous at 21°C)
Cell:	Six No. 118P in series
Jacket:	Metal


TEMPERATURE EFFECTS
Typical Service to 4.8 Volts

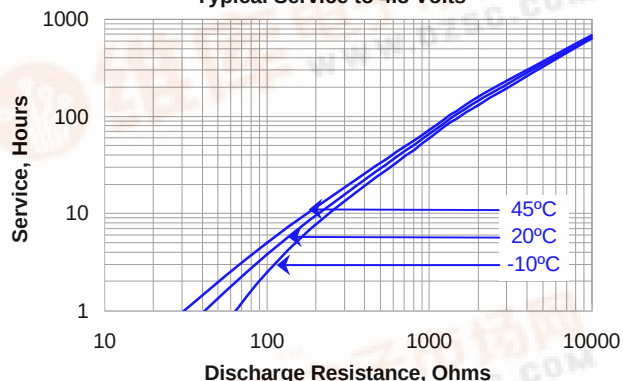

CONSTANT RESISTANCE PERFORMANCE
Typical Service

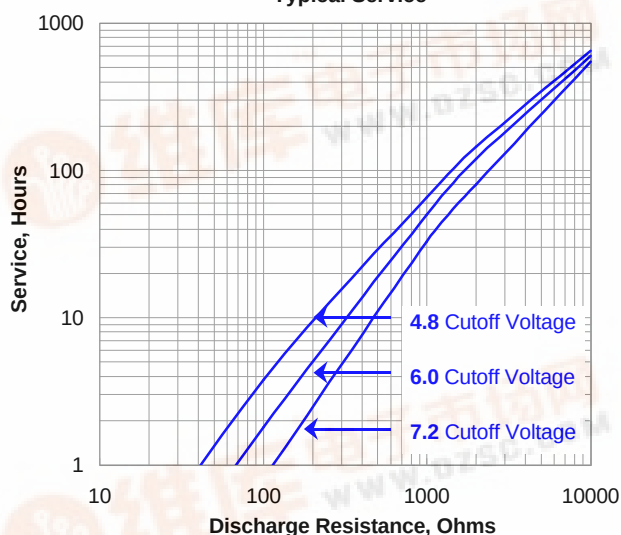



CONSTANT CURRENT DISCHARGE
Typical Service

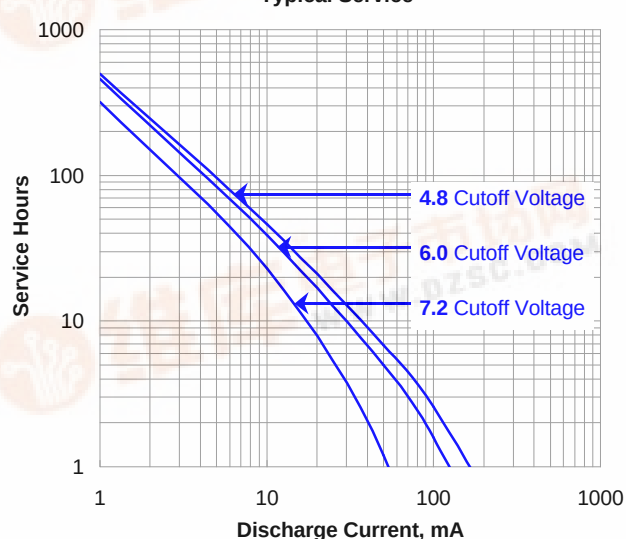

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

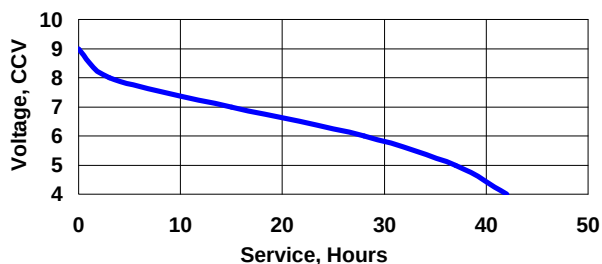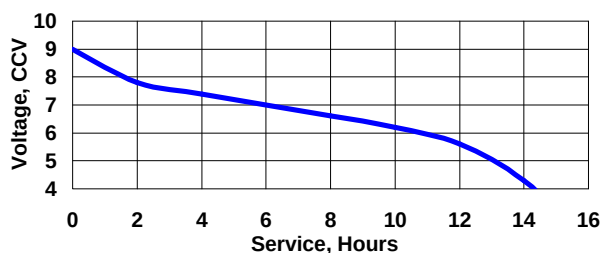ENERGIZER NO. 1222Typical Applications**RADIO**
620 ohm - 2 hours/day**TOY**
270 ohm - 1 hr/day**CALCULATOR**
180 ohm - 0.5 hr/day**RECORDER**
180 ohms - 1 hr/day**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.