



November 1988
Revised November 1999

74AC169

4-Stage Synchronous Bidirectional Counter

General Description

The AC169 is fully synchronous 4-stage up/down counter. The AC169 is a modulo-16 binary counter. It features a preset capability for programmable operation, carry lookahead for easy cascading and a U/D input to control the direction of counting. All state changes, whether in counting or parallel loading, are initiated by the LOW-to-HIGH transition of the Clock.

Features


- I_{CC} reduced by 50%
- Synchronous counting and loading
- Built-In lookahead carry capability
- Presettable for programmable operation
- Outputs source/sink 24 mA

Ordering Code:


Order Number	Package Number	Package Description
74AC169SC	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Body
74AC169SJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74AC169MTC	MTC16	16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
74AC169PC	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

Logic Symbols

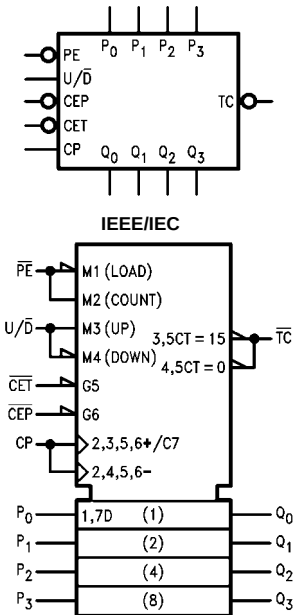

Connection Diagram



Pin Descriptions

Pin Names	Description
$\overline{CEP}$	Count Enable Parallel Input
$\overline{CET}$	Count Enable Trickle Input
CP	Clock Pulse Input
P_0-P_3	Parallel Data Inputs
$\overline{PE}$	Parallel Enable Input
$U/\overline{D}$	Up-Down Count Control Input
Q_0-Q_3	Flip-Flop Outputs
$\overline{TC}$	Terminal Count Output

FACT™ is a trademark of Fairchild Semiconductor Corporation.


74AC169

Functional Description

The AC169 uses edge-triggered J-K-type flip-flops and have no constraints on changing the control or data input signals in either state of the Clock. The only requirement is that the various inputs attain the desired state at least a setup time before the rising edge of the clock and remain valid for the recommended hold time thereafter. The parallel load operation takes precedence over the other operations, as indicated in the Mode Select Table. When $\overline{PE}$ is LOW, the data on the P_0 – P_3 inputs enters the flip-flops on the next rising edge of the Clock. In order for counting to occur, both $\overline{CEP}$ and $\overline{CET}$ must be LOW and $\overline{PE}$ must be HIGH; the $\overline{U/D}$ input then determines the direction of counting. The Terminal Count ($\overline{TC}$) output is normally HIGH and goes LOW, provided that $\overline{CET}$ is LOW, when a counter reaches zero in the Count Down mode or reaches 15 in the Count Up mode. The $\overline{TC}$ output state is not a function of the Count Enable Parallel ($\overline{CEP}$) input level. If an illegal state occurs, the AC169 will return to the legitimate sequence within two counts. Since the $\overline{TC}$ signal is derived by decoding the flip-flop states, there exists the possibility of decoding spikes on $\overline{TC}$. For this reason the use of $\overline{TC}$ as a clock signal is not recommended (see logic equations below).

1. Count Enable = $\overline{CEP} \cdot \overline{CET} \cdot \overline{PE}$
2. Up: $\overline{TC} = Q_0 \cdot Q_1 \cdot Q_2 \cdot Q_3 \cdot (Up) \cdot \overline{CET}$
3. Down: $\overline{TC} = \overline{Q_0} \cdot \overline{Q_1} \cdot \overline{Q_2} \cdot \overline{Q_3} \cdot (Down) \cdot \overline{CET}$

Logic Diagram

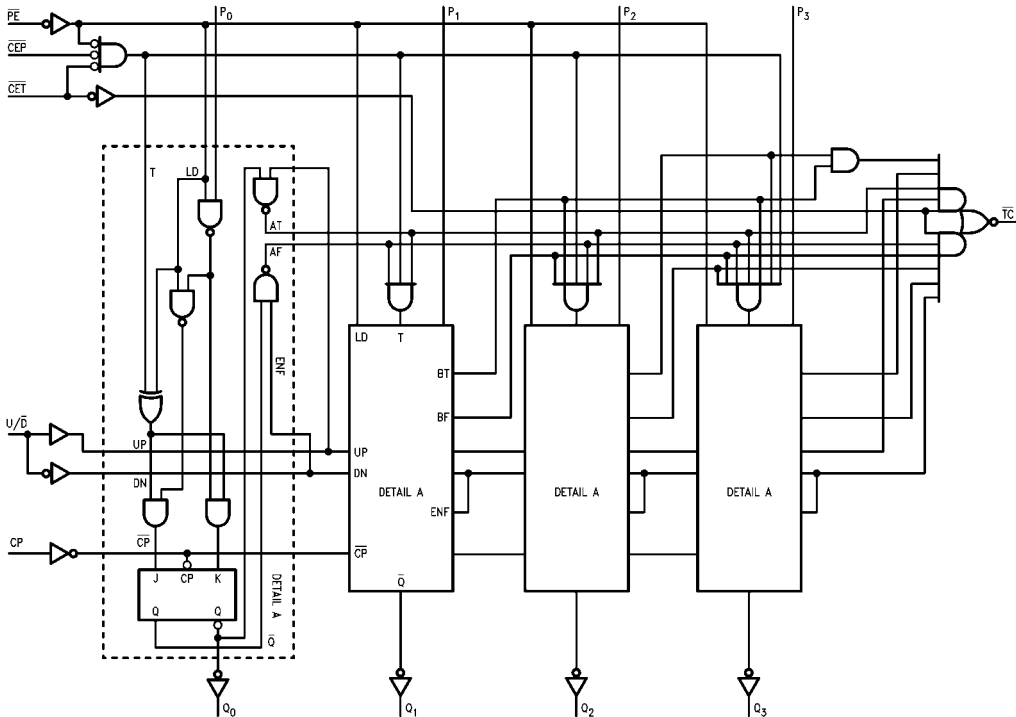


Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Mode Select Table

$\overline{PE}$	$\overline{CEP}$	$\overline{CET}$	$\overline{U/D}$	Action on Rising Clock Edge
L	X	X	X	Load (P_n to Q_n)
H	L	L	H	Count Up (Increment)
H	L	L	L	Count Down (Decrement)
H	H	X	X	No Change (Hold)
H	X	H	X	No Change (Hold)

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

State Diagram




Absolute Maximum Ratings ^(Note 1)			Recommended Operating Conditions			
Supply Voltage (V _{CC})		-0.5V to +7.0V	Supply Voltage (V _{CC})		2.0V to 6.0V	
DC Input Diode Current (I _{IK})			Input Voltage (V _I)		0V to V _{CC}	
V _I = -0.5V		-20 mA	Output Voltage (V _O)		0V to V _{CC}	
V _I = V _{CC} + 0.5V		+20 mA	Operating Temperature (T _A)		-40°C to +85°C	
DC Input Voltage (V _I)		-0.5V to V _{CC} + 0.5V	Minimum Input Edge Rate (ΔV/Δt)			
DC Output Diode Current (I _{OK})			V _{IN} from 30% to 70% of V _{CC}			
V _O = -0.5V		-20 mA	V _{CC} @ 3.3V, 4.5V, 5.5V		125 mV/ns	
V _O = V _{CC} + 0.5V		+20 mA				
DC Output Voltage (V _O)		-0.5V to V _{CC} + 0.5V				
DC Output Source						
or Sink Current (I _O)		±50 mA				
DC V _{CC} or Ground Current						
per Output Pin (I _{CC} or I _{GND})		±50 mA				
Storage Temperature (T _{STG})		-65°C to +150°C				
Junction Temperature (T _J)						
PDIP		140°C				
Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of FACT™ circuits outside databook specifications.						
DC Electrical Characteristics						
Symbol	Parameter	V _{CC} (V)	T _A = +25°C		Units	Conditions
			Typ	Guaranteed Limits		
V _{IH}	Minimum HIGH Level Input Voltage	3.0	1.5	2.1	V	V _{OUT} = 0.1V or V _{CC} - 0.1V
		4.5	2.25	3.15		
		5.5	2.75	3.85		
V _{IL}	Maximum LOW Level Input Voltage	3.0	1.5	0.9	V	V _{OUT} = 0.1V or V _{CC} - 0.1V
		4.5	2.25	1.35		
		5.5	2.75	1.65		
V _{OH}	Minimum HIGH Level Output Voltage	3.0	2.99	2.9	V	I _{OUT} = -50 μA
		4.5	4.49	4.4		
		5.5	5.49	5.4		
		3.0		2.56	V	V _{IN} = V _{IL} or V _{IH} I _{OH} = -12 mA I _{OH} = -24 mA I _{OH} = -24 mA (Note 2)
		4.5		3.86		
		5.5		4.86		
V _{OL}	Maximum LOW Level Output Voltage	3.0	0.002	0.1	V	I _{OUT} = 50 μA
		4.5	0.001	0.1		
		5.5	0.001	0.1		
		3.0		0.36	V	V _{IN} = V _{IL} or V _{IH} I _{OL} = 12 mA I _{OL} = 24 mA I _{OL} = 24 mA (Note 2)
		4.5		0.36		
		5.5		0.36		
I _{IN} (Note 4)	Maximum Input Leakage Current	5.5		±0.1	μA	V _I = V _{CC} , GND
I _{OLD}	Minimum Dynamic	5.5		75	mA	V _{OLD} = 1.65V Max
I _{OHD}	Output Current (Note 3)	5.5		-75	mA	V _{OHD} = 3.85V Min
I _{CC} (Note 4)	Maximum Quiescent Supply Current	5.5		40.0	μA	V _{IN} = V _{CC} or GND
Note 2: All outputs loaded; thresholds on input associated with output under test.						
Note 3: Maximum test duration 2.0 ms, one output loaded at a time.						
Note 4: I _{IN} and I _{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V _{CC} .						

74AC169



AC Electrical Characteristics								
Symbol	Parameter	V _{CC} (V) (Note 5)	T _A = +25°C, C _L = 50 pF			T _A = -40°C to +85°C, C _L = 50 pF		Units
			Min	Typ	Max	Min	Max	
f _{MAX}	Maximum Clock	3.3	75	118		65		MHz
	Frequency	5.0	100	154		90		
t _{PLH}	Propagation Delay	3.3	2.5	9.5	13.0	2.0	14.5	ns
	CP to Q _n ($\overline{PE}$ HIGH or LOW)	5.0	1.5	7.0	10.0	1.5	11.0	
t _{PHL}	Propagation Delay	3.3	2.5	10.5	14.5	2.0	16.0	ns
	CP to Q _n ($\overline{PE}$ HIGH or LOW)	5.0	1.5	7.5	11.0	1.5	12.0	
t _{PLH}	Propagation Delay	3.3	4.5	13.5	18.0	3.5	22.0	ns
	CP to $\overline{TC}$	5.0	3.0	9.5	13.0	2.0	14.0	
t _{PHL}	Propagation Delay	3.3	3.5	13.5	18.0	3.0	20.5	ns
	CP to $\overline{TC}$	5.0	2.5	9.5	13.0	2.0	14.5	
t _{PLH}	Propagation Delay	3.3	3.5	11.0	15.0	3.0	16.5	ns
	$\overline{CET}$ to $\overline{TC}$	5.0	3.0	8.0	10.5	2.5	12.0	
t _{PHL}	Propagation Delay	3.3	3.0	9.5	12.5	2.5	14.5	ns
	$\overline{CET}$ to $\overline{TC}$	5.0	2.0	7.0	9.0	1.5	10.0	
t _{PLH}	Propagation Delay	3.3	3.5	11.0	15.0	3.0	17.0	ns
	U/ $\overline{D}$ to $\overline{TC}$	5.0	2.5	8.0	10.5	2.0	12.0	
t _{PHL}	Propagation Delay	3.3	2.5	10.0	13.5	2.0	15.5	ns
	U/ $\overline{D}$ to $\overline{TC}$	5.0	1.5	7.0	9.5	1.5	10.5	
Note 5: Voltage Range 3.3 is 3.3V ± 0.3V Voltage Range 5.0 is 5.0V ± 0.5V								
AC Operating Requirements								
Symbol	Parameter	V _{CC} (V) (Note 6)	T _A = +25°C, C _L = 50 pF		T _A = -40°C to +85°C, C _L = 50 pF		Units	
			Typ	Guaranteed Minimum				
t _S	Setup Time, HIGH or LOW	3.3	3.0	4.5	5.0		ns	
	P _n to CP	5.0	1.5	2.5	2.5			
t _H	Hold Time, HIGH or LOW	3.3	-1.5	0.5	0.5		ns	
	P _n to CP	5.0	-0.5	1.5	1.5			
t _S	Setup Time, HIGH or LOW	3.3	7.5	10.5	12.5		ns	
	$\overline{CEP}$ to CP	5.0	4.5	7.0	8.0			
t _H	Hold Time, HIGH or LOW	3.3	-4.5	0	0		ns	
	$\overline{CEP}$ to CP	5.0	-2.0	0.5	1.0			
t _S	Setup Time, HIGH or LOW	3.3	7.0	10.0	12.0		ns	
	$\overline{CET}$ to CP	5.0	4.0	6.5	8.0			
t _H	Hold Time, HIGH or LOW	3.3	-6.0	0	0		ns	
	$\overline{CET}$ to CP	5.0	-4.0	0.5	1.0			
t _S	Setup Time, HIGH or LOW	3.3	3.5	5.5	6.5		ns	
	$\overline{PE}$ to CP	5.0	2.0	3.5	4.0			
t _H	Hold Time, HIGH or LOW	3.3	-3.5	0	0		ns	
	$\overline{PE}$ to CP	5.0	-1.5	0.5	0.5			
t _S	Setup Time, HIGH or LOW	3.3	7.0	10.0	11.5		ns	
	U/ $\overline{D}$ to CP	5.0	4.5	6.5	7.5			
t _H	Hold Time, HIGH or LOW	3.3	-7.0	0	0		ns	
	U/ $\overline{D}$ to $\overline{CP}$	5.0	-4.0	0.5	0.5			
t _W	CP Pulse Width,	3.3	2.0	3.0	4.0		ns	
	HIGH or LOW	5.0	2.0	3.0	3.0			
Note 6: Voltage Range 3.3 is 3.3V ± 0.3V Voltage Range 5.0 is 5.0V ± 0.5V								
Capacitance								
Symbol	Parameter	Typ	Units	Conditions				
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = OPEN				
C _{PD}	Power Dissipation Capacitance	60.0	pF	V _{CC} = 5.0V				

Physical Dimensions inches (millimeters) unless otherwise noted

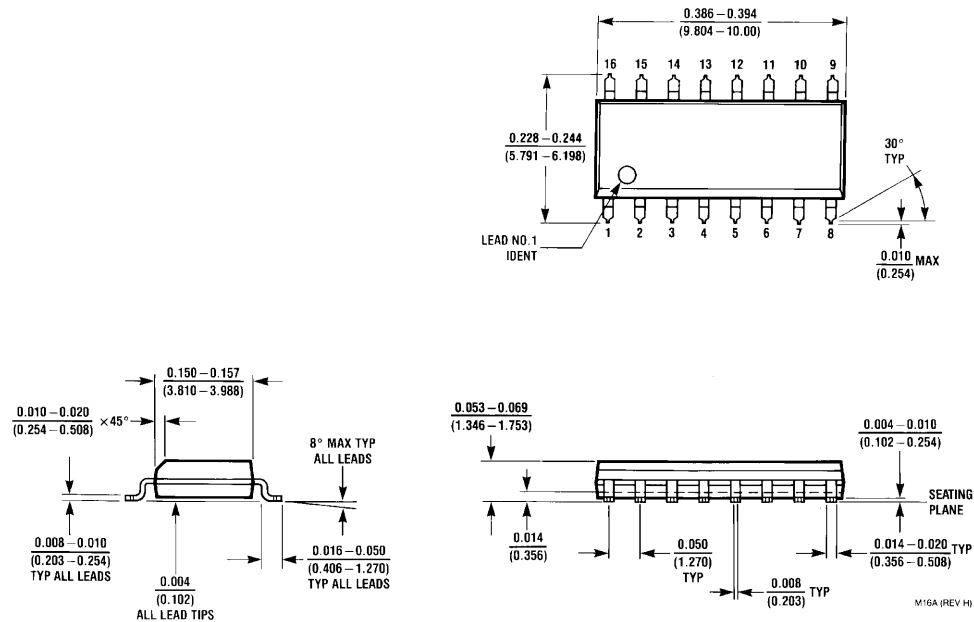


**16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 1.150" Narrow Body
Package Number M16A**


74AC169

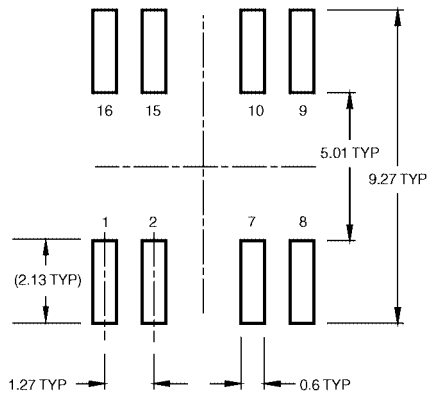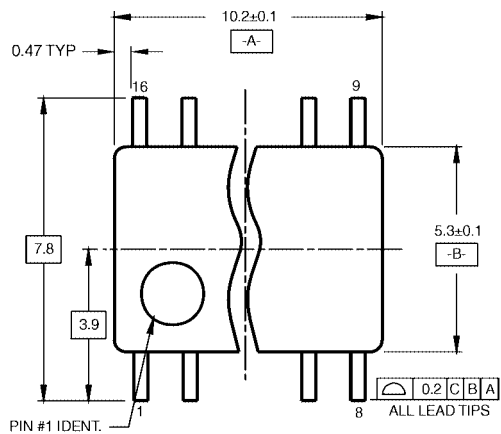Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

LAND PATTERN RECOMMENDATION

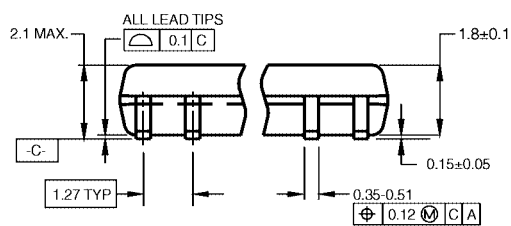


DIMENSIONS ARE IN MILLIMETERS

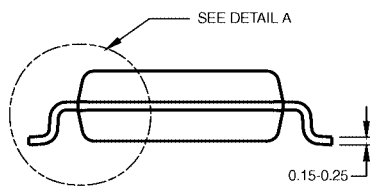

NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION,
ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD
FLASH, AND TIE BAR EXTRUSIONS.

M16DRevB1

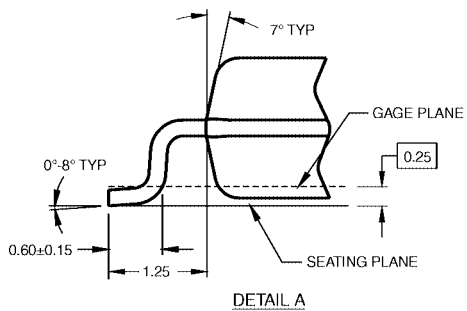

DETAIL A

**16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
Package Number M16D**

