

NOTES:

1.0 PINS NOT ELECTRICALLY CONNECTED ARE OMITTED.


ELECTRICAL SPECIFICATIONS:

1.0 INDUCTANCE: P1–J1=P2–J2 ; P4–J4=P5–J5 : 65 uH 0.01V, 10 KHz, nominal.

2.0 DC RESISTANCE: P1–J1 : .5 ohm MAX
P2–J2 : .5 ohm MAX
P4–J4 : .5 ohm MAX
P5–J5 : .5 ohm MAX

3.0 COMMON MODE: CMA (–dB)

FREQUENCY (MHZ)		TYPICAL	MIN
1	8	5	
5	17	15	
20	23	15	
70	25	20	
200	22	17	
500	11	6	




THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

MagJack

Part Number
CNTRY YVWW-FC
Bel Stewart


NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD,
50 MICRO-INCHES MIN. IN CONTACT AREA.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE $\pm .005$ [0.13]
- WAVE SOLDER COMPATIBLE - PREHEAT 125C/90SECS.

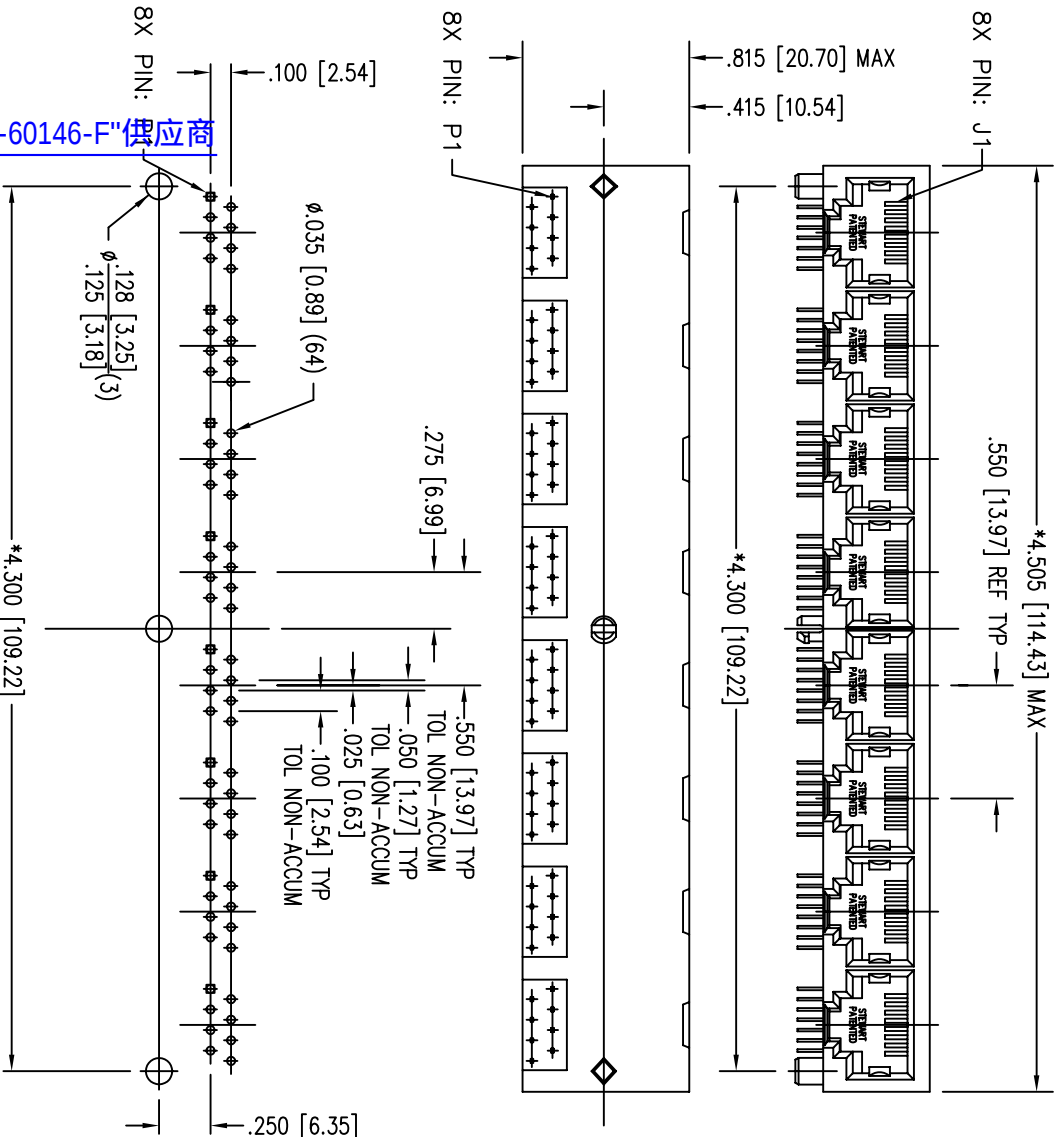

查询"SI-60146-F"供应商

P.C.B. RECOMMENDED HOLE LAYOUT
SEEN FROM COMPONENT SIDE
TOLERANCE $\pm .003$ [0.08] UNLESS OTHERWISE SPECIFIED



Bel Stewart Connector
11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512

<http://www.stewartconnector.com>

MagJack

SHEET
2 OF 2

DRAWING NO.

SI-60146-F

REV.
06

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.