

TABLE I - 36 AWG

NOMINAL NO. OF CARRIERS PER LAYER	NOMINAL I. D.	NO. OF ENDS PER LAYER	CURRENT RATING AMPS	LBS/ 100 FT
24	.031	24	7.0	.20
24	.062	48	11.0	.40
24	.078	72	16.0	.60
24	.109	96	19.0	.83
24	.125	120	25.0	1.03
24	.156	240	40.0	2.09
24	.171	168	32.0	1.43
24	.188	192	33.0	1.63
24	.203	312	46.0	2.80
24	.250	384	53.0	3.45
48	.375	384	53.0	3.95
48	.500	528	62.0	4.77
48	.625	720	85.0	5.94
48	.781	864	88.0	7.35
64	.937	640	65.0	5.83
64	1.000	768	90.0	7.50
72	1.250	792	T80	T80
72	1.375	864	T80	T80
72	1.500	936	T80	T80
96	2.000	1152	T80	T80
96	2.500	1248	T80	T80

PART NUMBER DEVELOPMENT

EXAMPLE: 100 - 002 A 203 L

PRODUCT SERIES

BASIC NO

A = 36 AWG
B = 34 AWG

DASH NO TABLE I

INSERT LETTER L
FOR LANYARD (OMIT FOR NONE)

NOTES:

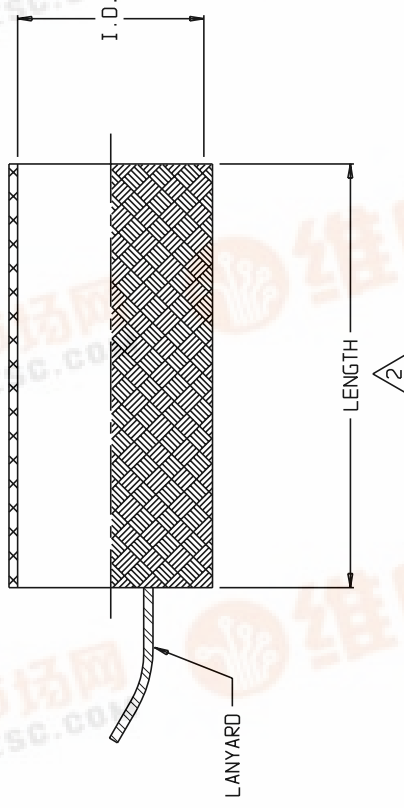
- DIRECT CURRENT RATING ARE GIVEN FOR INFORMATION ONLY. VALUES SHOWN ARE FOR UNINSULATED BRAID IN FREE AIR, AT 30°C (86°F). ACTUAL VALUES WILL DEPEND ON PERMISSIBLE TEMPERATURE RISE, VOLTAGE DROP AND OTHER CONDITIONS OF SERVICE. VALUES SHOULD BE DE-RATED IF THE BRAID IS INSULATED OR IN CLOSE CONTACT WITH OTHER COMPONENTS.

2. MINIMUM ORDER LENGTH: 100 FEET, FOR LONGER LENGTHS BRAID WILL BE SUPPLIED IN RANDOM LENGTHS, NR. OF REELS & SIZE MFG. OPTION. CONTINUOUS LENGTHS MUST BE SPECIFIED BY CUSTOMER.

- MATERIAL/FINISH:
BRAID - COPPER/SILVER PLATED I.A.W. QQ-B-575B, ASTM B298 CLASS C
LANYARD - SYNTHETIC FIBER

REVISIONS

SYM.	DESCRIPTION	DATE	APPROVED
A	RELEASED	06/10/99	T.L.
B	REVISED PER DCN 17245	12/12/00	T.L.
C	REDRAWN PER DCN 22773	08/20/01	E.L.

[查询"100-002A781L"供应商](#)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN T.L.E.	06/09/99	GLENAIR, INC.		CAO 1995
TOLERANCES:		CHECK P.D.	06/09/99	1211 AIR WAY - GLENDALE - CALIFORNIA 91201		
FRACTIONS ± 1/16		ENGR R. PAINTER	06/09/99	BRAID, SINGLE LAYER TUBULAR, SILVER/COPPER		
DECIMALS .XX ± .03		APPROVED				
ANGLES ± 2°		P.D. C. J. J.				
DO NOT SCALE THIS DRAWING		RELEASE DATE	06/10/99	CODE IDENT. NO.	06324	REV.
B/F 99-7281 P/C 100		NON REPAIRABLE	COMMERCIAL ITEM	SCALE	N/A	100-002
				WEIGHT	N/A	SHEET 1 OF 1