



No. 370 / TR5®

IEC 60127-3/III, 250 V, F

Specifications

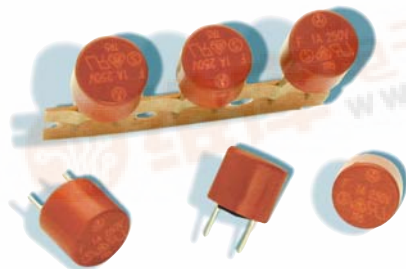

Dimensions (mm)

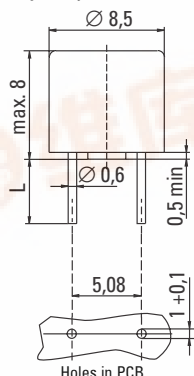

Long Leads (L=18.8mm)
Short Leads (L=4.3mm)

Time-Current Characteristic

Quick Acting (F)

Standard

IEC 60127-3/III

Approvals

VDE
SEMCO
cULus Recognized
METI
CCC

Features

Reduced PCB space requirements
Direct solderable or plug-in versions
Internationally approved
Low internal resistance
Shocksafe casing
Vibration resistant
Halogen free

WebLinks

Further infos see:

www.wickmanngroup.com

Further application infos see

Fuseology:

www.wickmanngroup.com/download/fuseology.pdf

Packaging

000: Tape/Ammopack (1000 pcs.)
041: Short Leads - Bulk (1000 pcs.)

Materials

Base/Cap: Brown Thermoplastic
Polyamide PA 6.6, UL 94 V0
Round Pins: Copper, Sn plated

Operating Temperature

-40 °C to +85 °C (consider de-rating)

Climatic Category

-40 °C/+85 °C/21 days
(IEC 60068-1,-2-1,-2-2,-2-78)

Stock Conditions

+10 °C to +60 °C
relative humidity ≤ 75 % yearly average,
without dew, maximum value for 30 days-95 %

Vibration Resistance

24 cycles at 15 min. each (EN 60068-6)
10 - 60 Hz at 0.75 mm amplitude
60 - 2000 Hz at 10 g acceleration

Lead Pull Strength

10 N (EN 60068-2-21)

Solderability

260 °C, ≤ 3 s (Wave)
350 °C, ≤ 3 s (Soldering iron)

Soldering Heat Resistance

260 °C, 10 s (IEC 60068-2-20)

Marking

Ⓜ, 370, 250 V, F, Current Rating, Approvals

Unit Weight

0.77 g (approx.)

Limits for Pre-arcing Time

Rated Current	1.5 x I _N	2.1 x I _N	2.75 x I _N	4 x I _N	10 x I _N
40 mA ... 6.30 A	> 1h	< 30 min	10 ms ... 3 s	3 ms ... 300 ms	< 20 ms



Permissible continuous operating current is ≤ 100 % at ambient temperature of 23 °C (73.4 °F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I _N Ⓜ max. (mV)	Power Dissipation 1.5 x I _N Ⓜ max. (mW)	Melting Integral 10 x I _N Ⓜ max. (A²s)	Approvals
							VDE SEMKO cULus METI-T-Mark CCC
40mA	0040	250V		900	100	0.0002	• • • •
50mA	0050	250V		320	80	0.00035	• • • •
63mA	0063	250V		350	100	0.0005	• • • •
80mA	0080	250V		370	120	0.0014	• • • •
100mA	0100	250V		600	130	0.0038	• • • •
125mA	0125	250V		550	172	0.0066	• • • •
160mA	0160	250V		500	165	0.014	• • • •
200mA	0200	250V		465	190	0.03	• • • •
250mA	0250	250V		400	250	0.051	• • • •
315mA	0315	250V	35 A / 250 V AC ¹ 50-60Hz cos φ = 1.0	380	250	0.1	• • • •
400mA	0400	250V		120	135	0.025	• • • •
500mA	0500	250V		120	155	0.042	• • • •
630mA	0630	250V		115	200	0.076	• • • •
800mA	0800	250V		120	310	0.12	• • • •
1.00A	1100	250V		110	310	0.2	• • • •
1.25A	1125	250V		100	360	0.31	• • • •
1.60A	1160	250V		100	600	0.53	• • • •
2.00A	1200	250V		85	500	0.98	• • • •
2.50A	1250	250V		80	660	1.8	• • • •
3.15A	1315	250V		90	950	3.1	• • • •
4.00A	1400	250V	40 A / 250 V AC	80	920	6.7	• • • •
5.00A	1500	250V	50 A / 250 V AC	80	1000	12.00	• • • •
6.30A*	1630	250V		70	1200	24.00	G • • •

* Per UL, approved breaking capacity is 50 A at 250 V.

* Conducting path min. 0.2 mm²

G = Expert Report

Order

Information

Qty.	Order-Number	Series	Amp Code	Packaging
		370		

Specifications are subject
to change without notice

Europe Tel: +49 2302 662-107
E-mail: sales@wickmann.com

Americas Tel: +1 404 699-7820
E-mail: service@wickmannusa.com


Asia Tel: +852 26 14-1108
E-mail: sales@wickmann.com.hk

China Tel: +86 21 6432 5146
E-mail: sales@wickmann.cn



[查询"370"供应商](#)

TR5® / No. 370

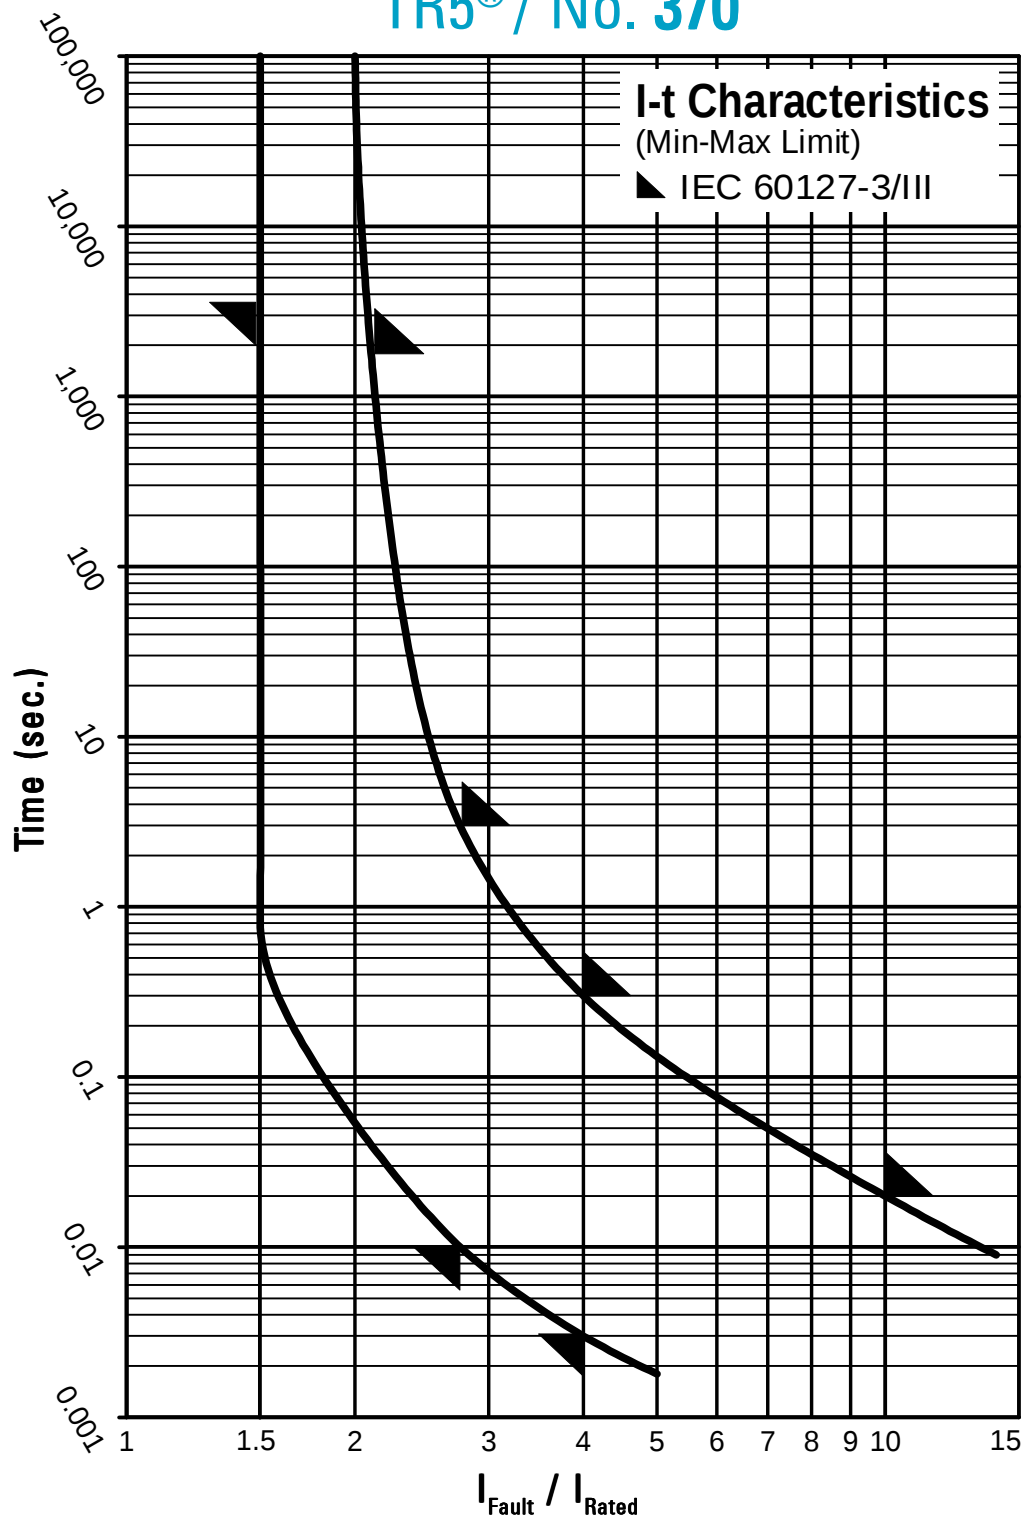

Contact WICKMANN for individual I-t curves