


ENERGIZER NO. E90




Industry Standard Dimensions in mm (inches)

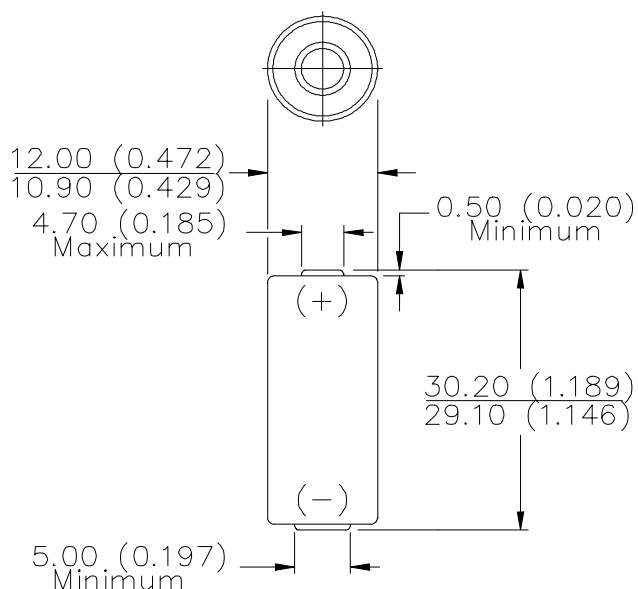


Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-910A, IEC-LR1
Battery Voltage:	1.5 Volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	1,000 mAh (to 0.8 volts) (Rated capacity at 25 mA continuous drain)
Average Weight:	9.0 grams (0.3 oz.)
Volume:	3.3 cubic centimeters (0.2 cubic inch)
Cell:	One No. 3-0411 (size 'N')
Jacket:	Plastic Label
Shelf Life:	7 years (80% of rated capacity)


TEMPERATURE EFFECTS
Typical Service to 0.8 Volts

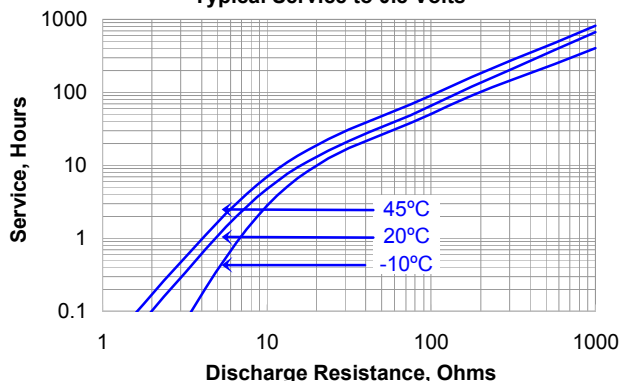

CONSTANT RESISTANCE PERFORMANCE
Typical Service

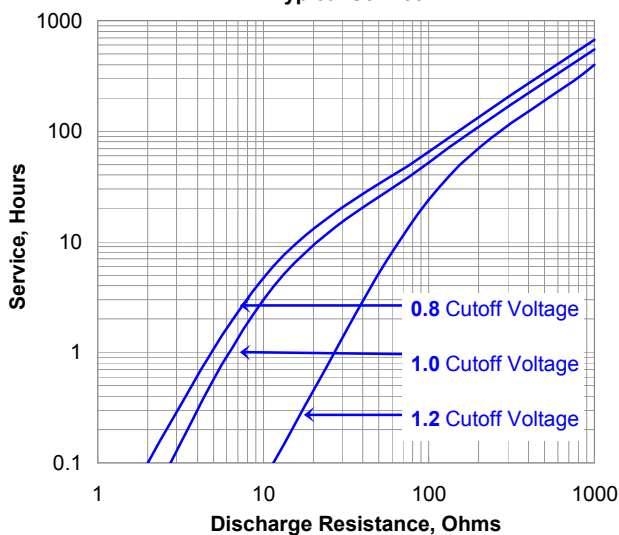

CONSTANT CURRENT DISCHARGE
Typical Service

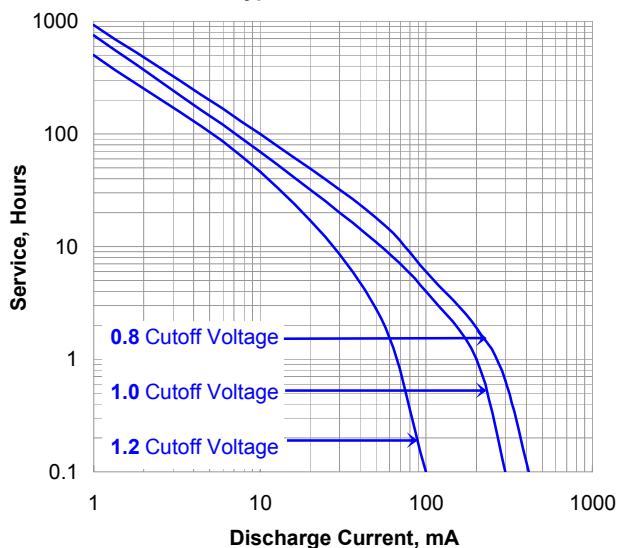

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved


ENERGIZER NO. E90

RESISTANCE TEST 300 ohms 12 hours/day

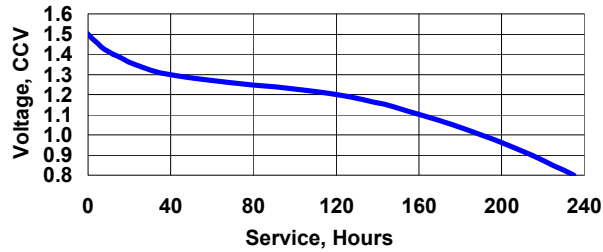


ANSI - IEC Industry Standard Tests @ 20° C

PORTABLE LIGHTING 5.1 ohms 5 min/day

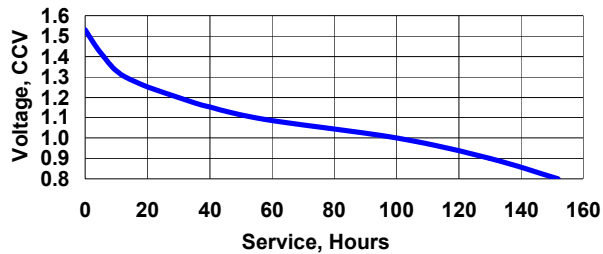

PAGER 3k ohms 24 hours/day - 10 ohms 5 sec/hour

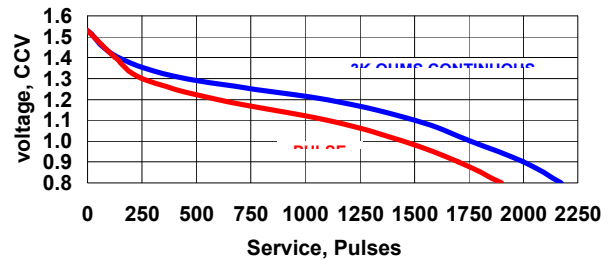

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved