

121-003

Type C Series 72 Annular Convuluted Tubing Thermally Stabilized Kynar®





Series 72
Convuluted
Tubing

121-003-16

Product Series Dash No.
 (Table I)

Basic No.

**TYPE
C
EXTERNAL
TIN/COPPER
BRAID**

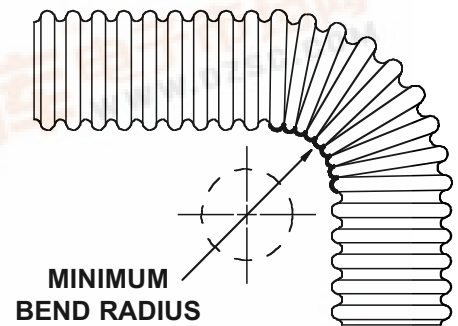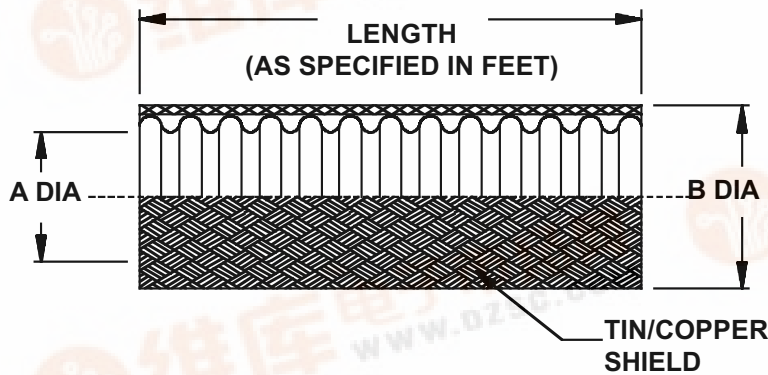

DASH NO.	A DIA		B DIA		MINIMUM BEND RADIUS
	MIN	MAX	MIN	MAX	
09	.24 (6.1)	.28 (7.1)	.42 (10.7)	.46 (11.7)	.75 (19.1)
12	.33 (8.4)	.37 (9.4)	.52 (13.2)	.56 (14.2)	1.00 (25.4)
16	.45 (11.4)	.50 (12.7)	.64 (16.3)	.70 (17.8)	1.38 (35.1)
20	.57 (14.5)	.62 (15.7)	.75 (19.1)	.81 (20.6)	1.69 (42.9)
24	.69 (17.5)	.75 (19.1)	.92 (23.4)	.98 (24.9)	1.88 (47.8)
28	.81 (20.6)	.87 (22.1)	1.04 (26.4)	1.12 (28.4)	2.00 (50.8)
32	.93 (23.6)	1.00 (25.4)	1.16 (29.5)	1.24 (31.5)	2.38 (60.5)
40	1.18 (30.0)	1.25 (31.8)	1.40 (35.6)	1.48 (37.6)	2.88 (73.2)

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.
For specific size lengths, consult factory.