
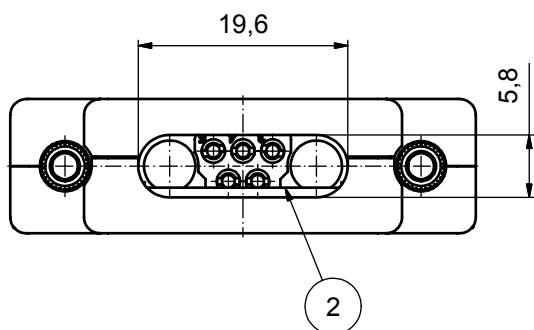
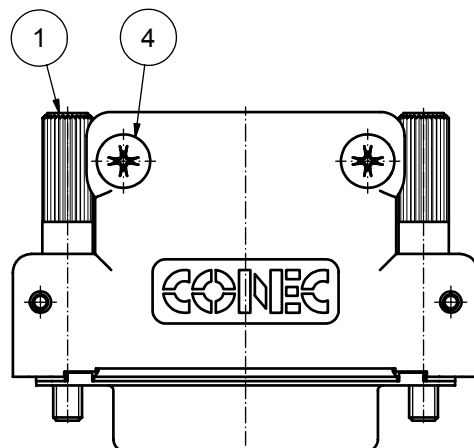
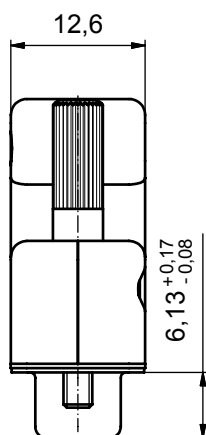
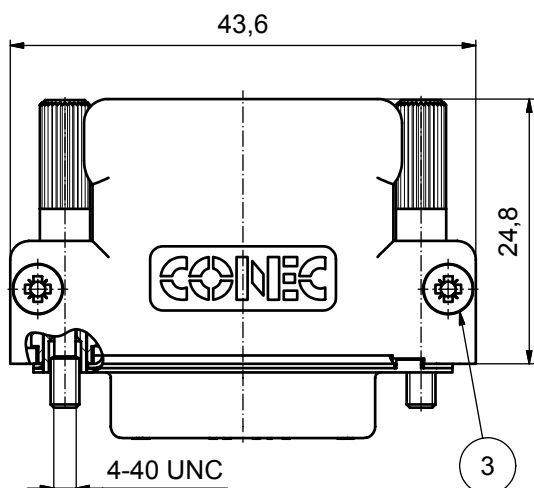
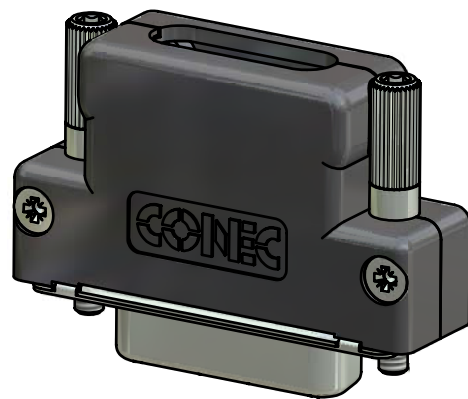


查询"13-000370"供应商

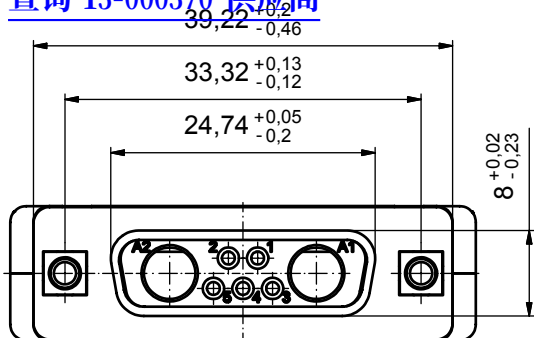

NOTES:

1. HOOD: PBT GF UL 94 V0
2. JACKSCREW 4-40 UNC: STEEL; NICKEL PLATED
3. SCREW FOR STRAIN RELIEF: STEEL; NICKEL PLATED
4. COVER SCREW: STEEL; NICKEL PLATED
5. STRAIN RELIEF: STEEL; NICKEL PLATED
6. FEMALE CONNECTOR 7W2, WITHOUT CONTACTS


Directive 2002/95/EC
"RoHS"
Compliant

POS. 1



2x JACKSCREW 4-40 UNC
with allen wrench head

POS. 2



1x CABLE STRAIN RELIEF

POS. 3



2x COVER SCREW

POS. 4



2x CABLE STRAIN RELIEF SCREW

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	ISO 2768-m
dim. in mm	
drawn	17.12.07 Schmidt
appd.	17.12.07 Mickenbecker
norm	
d-old	

CONEC

scale:	2:1
material:	see notes
title: PLASTIC HOOD with 7W2 Female Crimp Connector straight cable exit	
dwg no:	Inventor 10
13K3A2364	
part no:	13-000370
DIN-A3	sh: 1