
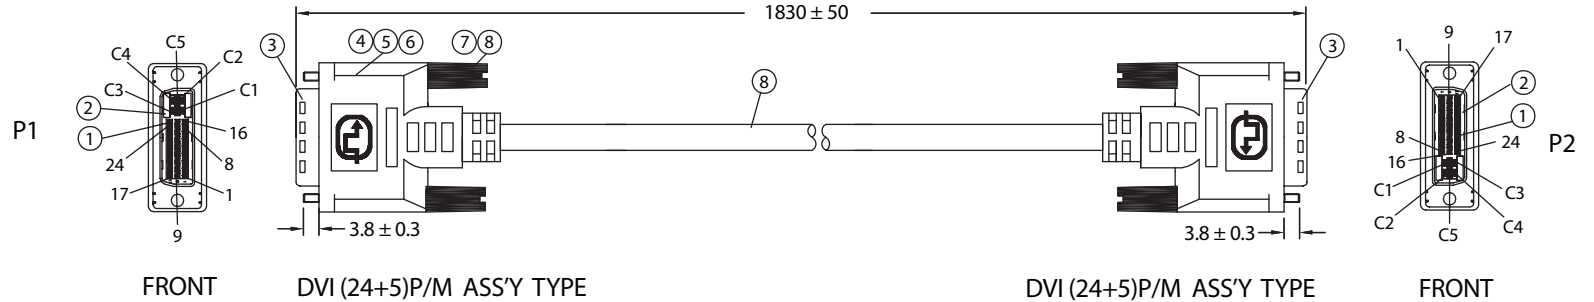


查询"1321020-06"供应商

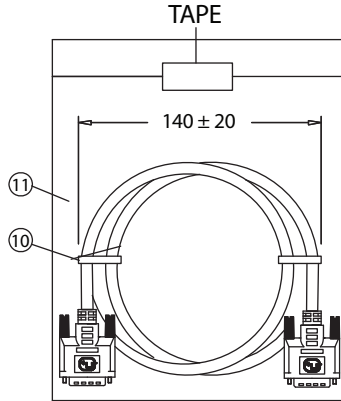

PIN OUT

P1	P2	P1	P2	P1	P2
1 WHITE	1 WHITE	6 WHITE	6 WHITE	C1 RED	C1 RED
2 ORANGE	2 ORANGE	7 YELLOW	7 YELLOW	C5 GREEN	C5 GREEN
3 DRAIN	3 DRAIN	17 WHITE	17 WHITE	C2 BLUE	C2 BLUE
4 DRAIN	4 DRAIN	18 YELLOW	18 YELLOW	C5 YELLOW	C5 YELLOW
5 BROWN	5 BROWN	19 DRAIN	19 DRAIN	8 BLUE	8 BLUE
9 WHITE	9 WHITE	20 WHITE	20 WHITE	14 RED	14 RED
10 BLACK	10 BLACK	21 GREEN	21 GREEN	15 BLACK	15 BLACK
11 DRAIN	11 DRAIN	22 DRAIN	22 DRAIN	16 BROWN	16 BROWN
12 WHITE	12 WHITE	23 WHITE	23 WHITE	SHELL BRAID SHELL	SHELL BRAID SHELL
13 BLUE	13 BLUE	24 RED	24 RED		

NOTES:

1. CABLE: UL20276

[(28AWGx1P+DW+FOIL)x7+(28AWG+SP+FOIL)x3+28AWGx5C+28AWGx1P+MYLAR+FOIL+BD]x1

OUTER JACKET COLOR: BEIGE, OD: 9.5 ± 0.3mm

PRINTING: "E166307 AWM 20276 28AWG 80°C 30V VW-1

LOW VOLTAGE COMPUTER CABLE"

2. CONNECTORS: DVI (24+5)P/M - DVI (24+5)P/M

3. HOOD: ASS'Y TYPE, COLOR: BEIGE

4. CABLE ELECTRICAL TEST:

<1>.100% OPEN SHORT & MISS WIRE TEST

<2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.

<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.

5. PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	DVI (24+5)P/M - CONTACT	BRONZE/GOLD PLATED SOLDER TYPE	58	
②	DVI (24+5)P/M - INSULATOR	THERMOPLASTIC/BLACK UL94V-0	2	
③	DVI (24+5)P/M - SHELL	NICKEL PLATED	2	
④	DVI (24+5)P/M -CAN	STEEL TIN PLATED	2	
⑤	COPPER FOIL	WIDTH: 15mm	2	
⑥	DVI (24+5)P/M - COVER	45P PVC/COLOR: BEIGE	2	
⑦	THUMB SCREW	#4-40 2.8x45, NICKEL PLATED	4	
⑧	SCREW - MOLD	35P PVC/COLOR: BEIGE	4	
⑨	CABLE DVI 24+5 UL20276	KL03009ABK01A	1	
⑩	MINI TIE	PE/BLACK	2	
⑪	POLYBAG	PE/0.08x180x220mm	1	

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 1321020-06 RoHS Compliant		
0-1	0.15	Description: DVI(24+5)P/M - DVI(24+5)P/M		
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Grubb 01-03-07	01-03-07	JJH / 01-03-07
250-500	1.20			