


Features


- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTA)
- Built-In Biasing Resistor, R1 only
- Lead Free/RoHS Compliant (Note 2)

Mechanical Data

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 2)
- Weight: 0.002 grams (approx.)
- Ordering Information (See Page 2)

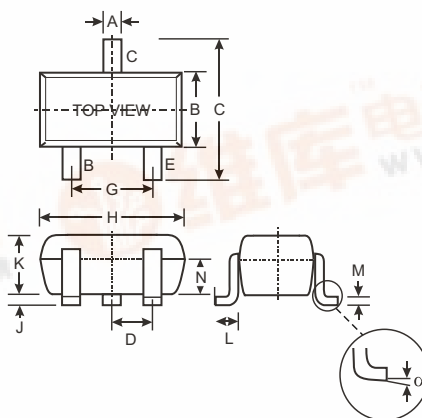

SOT-523			
Dim	Min	Max	Typ
A	0.15	0.30	0.22
B	0.75	0.85	0.80
C	1.45	1.75	1.60
D			0.50
G	0.90	1.10	1.00
H	1.50	1.70	1.60
J	0.00	0.10	0.05
K	0.60	0.80	0.75
L	0.10	0.30	0.22
M	0.10	0.20	0.12
N	0.45	0.65	0.50
	0	8	
All Dimensions in mm			

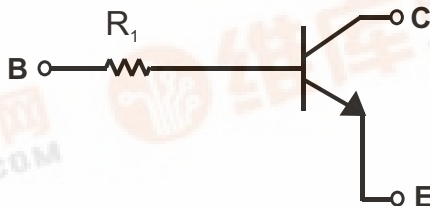

SCHEMATIC DIAGRAM

P/N	R1 (NOM)	MARKING
DDTC113TE	1K	N01
DDTC123TE	2.2K	N03
DDTC143TE	4.7K	N07
DDTC114TE	10K	N12
DDTC124TE	22K	N16
DDTC144TE	47K	N19
DDTC115TE	100K	N23
DDTC125TE	200K	N25

Maximum Ratings @ T_A = 25 °C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CB0}	50	V
Collector-Emitter Voltage	V _{CE0}	50	V
Emitter-Base Voltage	V _{EB0}	5	V
Collector Current	I _C (Max)	100	mA
Power Dissipation	P _d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{JA}	833	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

- Note:
- Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 - No purposefully added lead

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	50			V	$I_C = 50\text{ A}$
Collector-Emitter Breakdown Voltage	BV_{CEO}	50			V	$I_C = 1\text{ mA}$
Emitter-Base Breakdown Voltage	BV_{EBO}	5			V	$I_E = 50\text{ A}$
Collector Cutoff Current	I_{CBO}			0.5	A	$V_{CB} = 50\text{ V}$
Emitter Cutoff Current	I_{EBO}			0.5	A	$V_{EB} = 4\text{ V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			0.3	V	$I_C/I_B = 10\text{ mA}/1\text{ mA}$ DDTC113TE $I_C/I_B = 5\text{ mA}/0.5\text{ mA}$ DDTC123TE $I_C/I_B = 2.5\text{ mA}/.25\text{ mA}$ DDTC143TE $I_C/I_B = 1\text{ mA}/.1\text{ mA}$ DDTC114TE $I_C/I_B = 5\text{ mA}/0.5\text{ mA}$ DDTC124TE $I_C/I_B = 2.5\text{ mA}/.25\text{ mA}$ DDTC144TE $I_C/I_B = 1\text{ mA}/0.1\text{ mA}$ DDTC115TE $I_C/I_B = .5\text{ mA}/.05\text{ mA}$ DDTC125TE
DC Current Transfer Ratio	h_{FE}	100	250	600		$I_C = 1\text{ mA}$, $V_{CE} = 5\text{ V}$
Input Resistor (R_1) Tolerance	R_1	-30		+30	%	
Gain-Bandwidth Product*	f_T		250		MHz	$V_{CE} = 10\text{ V}$, $I_E = -5\text{ mA}$, $f = 100\text{ MHz}$

* Transistor - For Reference Only

Ordering Information (Note 3)

Device	Packaging	Shipping
DDTC113TE-7-F	SOT-523	3000/Tape & Reel
DDTC123TE-7-F	SOT-523	3000/Tape & Reel
DDTC143TE-7-F	SOT-523	3000/Tape & Reel
DDTC114TE-7-F	SOT-523	3000/Tape & Reel
DDTC124TE-7-F	SOT-523	3000/Tape & Reel
DDTC144TE-7-F	SOT-523	3000/Tape & Reel
DDTC115TE-7-F	SOT-523	3000/Tape & Reel
DDTC125TE-7-F	SOT-523	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information


XXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

[查询"DDTC125TE-7-F"供应商](#)

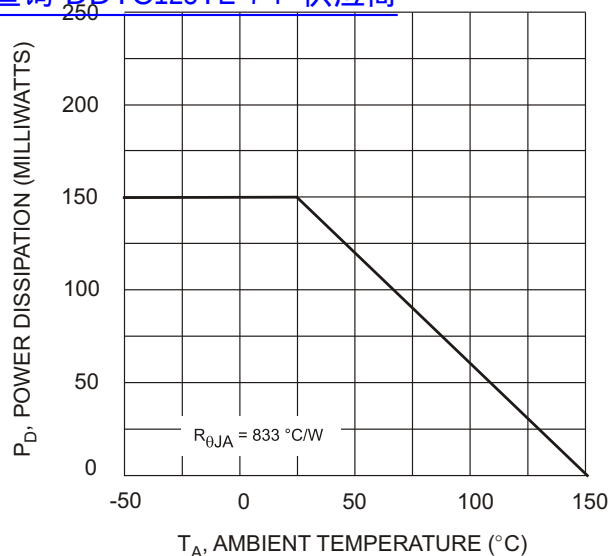


Fig. 1 Derating Curve

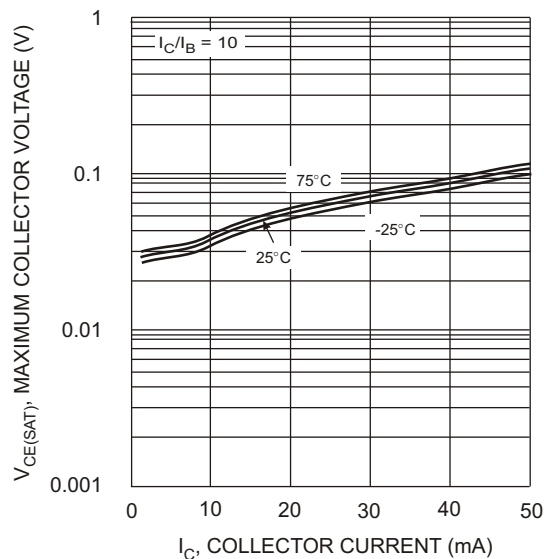


Fig. 2 $V_{CE(SAT)}$ vs. I_C

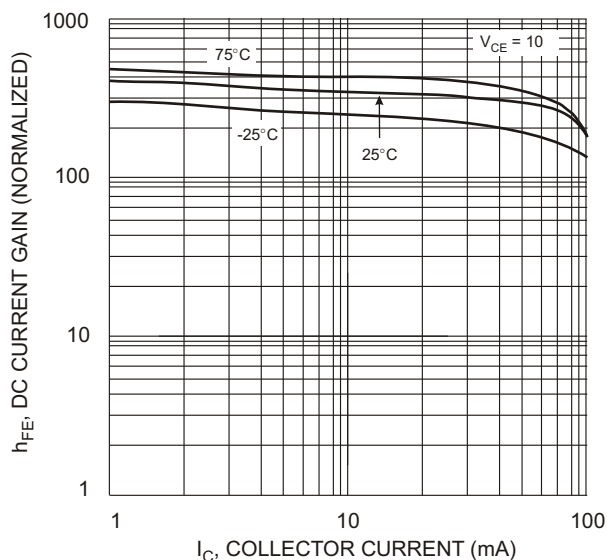


Fig. 3 DC Current Gain

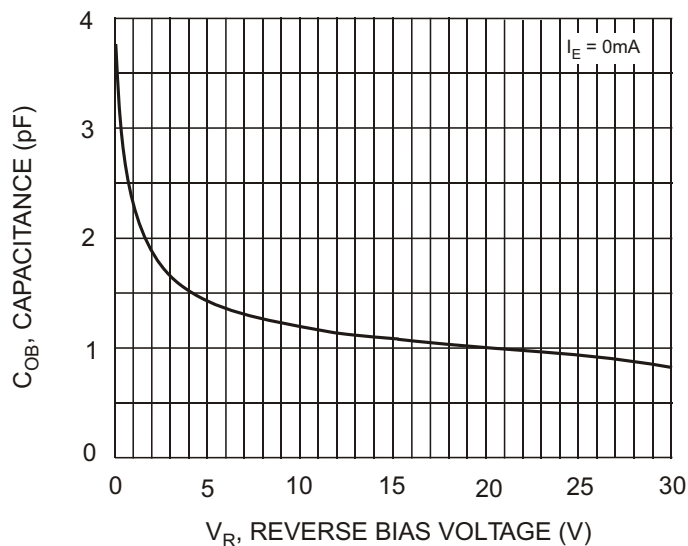


Fig. 4 Output Capacitance

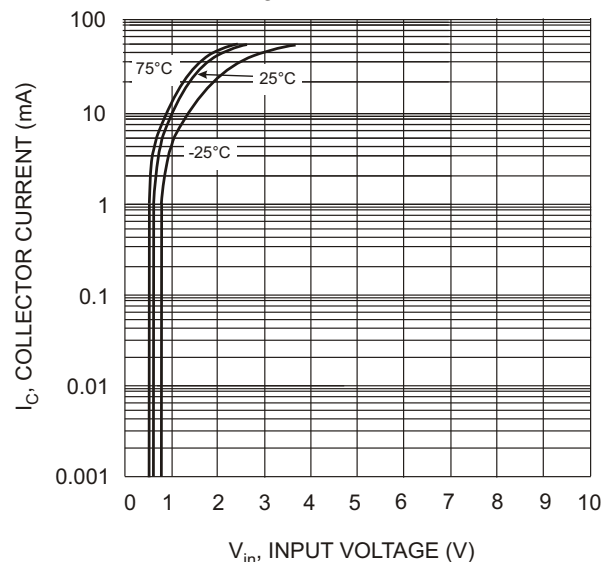


Fig. 5 Collector Current Vs. Input Voltage

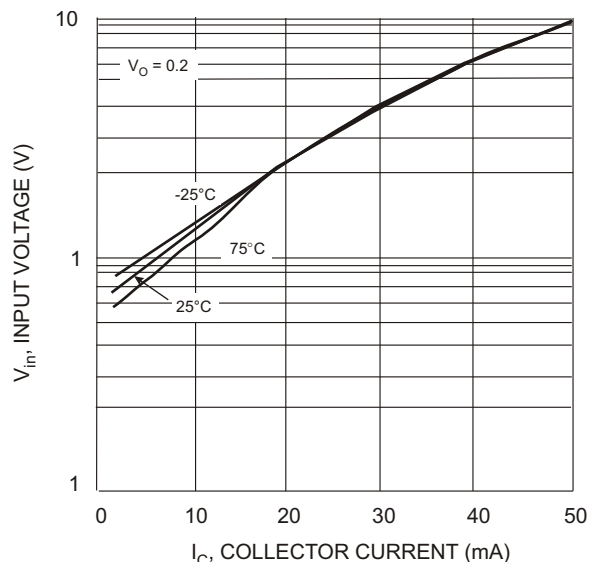


Fig. 6 Input Voltage vs. Collector Current

[查询"DDTC125TE-7-F"供应商](#)**IMPORTANT NOTICE**

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at **www.diodes.com** are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.