

273-302
↓
273-338

查询 01393346 016 供应商

DIP-FIX Links/Switches A1347 for Printed Circuits

DIP-FIX links/switches; multi-section



Tails suitable for center spacing 2,54 mm in acc. with DIN 40803

DIP-FIX make contacts (8 or 24-section in-line switches)

Plastic lug for locating
the spring contact in
the OFF position

Separating points,
for individual
connection



Circuit diagram and recommended
coding for the connections
(Example: 8 make contacts)

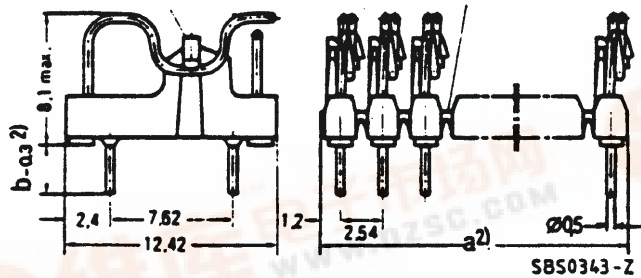

DIP-FIX changeover contacts (4 or 12-section in-line switches)

Separating points,
for individual connection

Circuit diagram and recommended
coding for the connections
(Example: 8 changeover contacts)

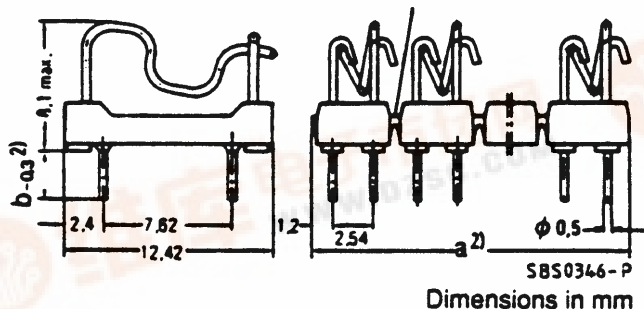

Dimensions in mm

Contact materials
Contact surface
Surface of the tails

Sn Pb } whiskerproof
Sn Pb }

Voltage rating
Current rating
Switch capacity

10 mV ... 60 V }
≤ 0,5 A } connection
≤ 5 VA } not soldered¹⁾

Contact resistance (millivolt method); initial value
Insulation resistance; initial value
Dielectric
Ambient temperature range

≤ 100 mΩ
≥ 10⁵ MΩ
PBTP-GF
- 40 ... + 85 °C

¹⁾ Safeguarding the ON position is possible by manual soldering, if required.

²⁾ For dimensions "a" and "b" see ordering table

Switch	In-line switch sections	Dim. "a"	Dim. "b"	Ordering code	PU Pcs/ea	Price each			
						1 +	50 +	100 +	500 +
Make contact	8	20,32	3,1	C42315-A1347-A108	75				
	24	60,62	3,1	C42315-A1347-A124	25				
Change- over contact	4	20,32	3,1	C42315-A1347-A204	75				
	12	60,62	3,1	C42315-A1347-A212	75				
	12	60,62	5,4	C42315-A1347-A312	25				

Other number of sections upon request.