

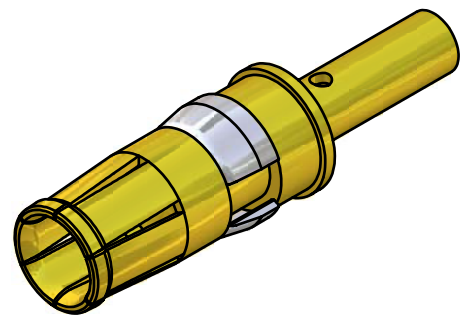
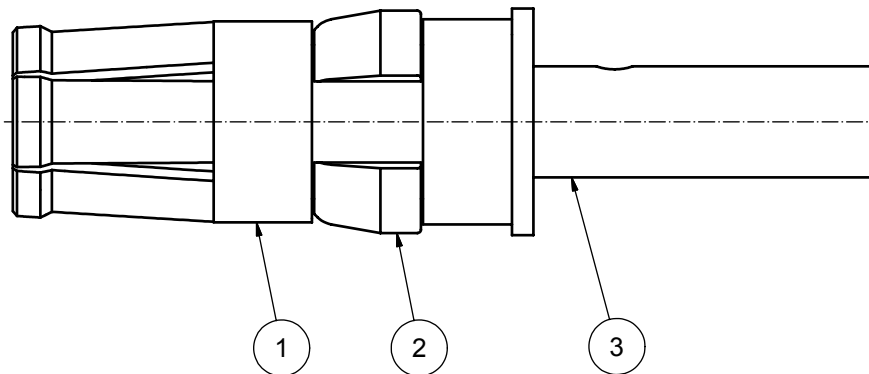


查询"13-000291"供应商

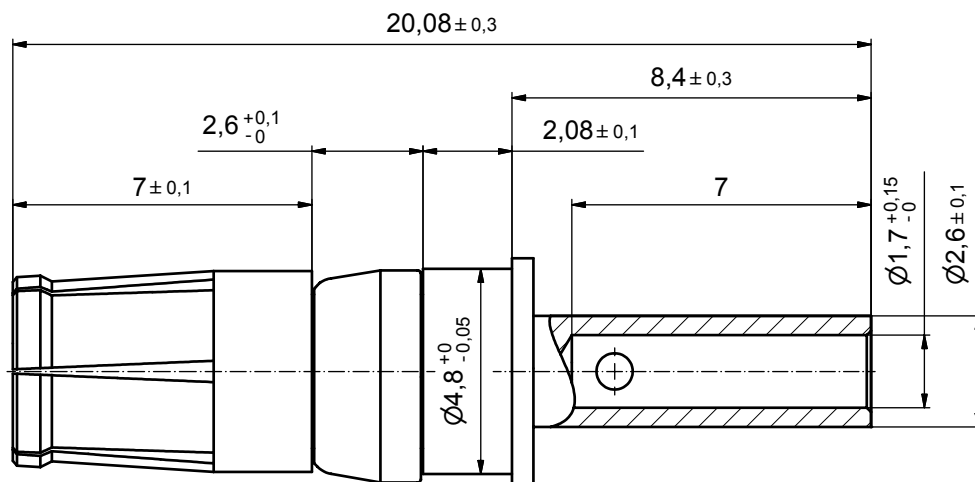

STRIPPING DIMENSIONS



Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

CRIMPING:

USE CRIMP TOOL: 360X10409X

WITH TOOL INSERT: 36-000060

SELECTOR SETTINGS: 3 FOR AWG 16

2 FOR AWG 18

2 FOR AWG 20

3	1	REAR SIDE	COPPER ALLOY	min. 8µin HARD GOLD over min. 50µin NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
item	quantity	part description	material	plating
partlist				
tolerance			ISO 2768-m	dim. in mm
date			name	scale: 8:1
drawn			03.01.08	Schmidt
appd.			03.01.08	Koch
norm				
d-old				
a			Origin	
rev.			description	date
name				
DO NOT ALTER CAD DRAWING BY HAND				
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				
CONEC®				
scale:			8:1	
material:			see partlist	
title:			HIGH POWER CONTACT FEMALE	
			CRIMP VERSION 10A	
			D-SUB COMBINATION	
dwg no:			Inventor 10	DIN-A3
			13K1A2381	sh: 1
part no:			13-000291	

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:
NAME: TITLE:
COMPANY NAME:
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL