


**Models 72926**  
**IEC Insulated BNC Male 50 ohm Cable**

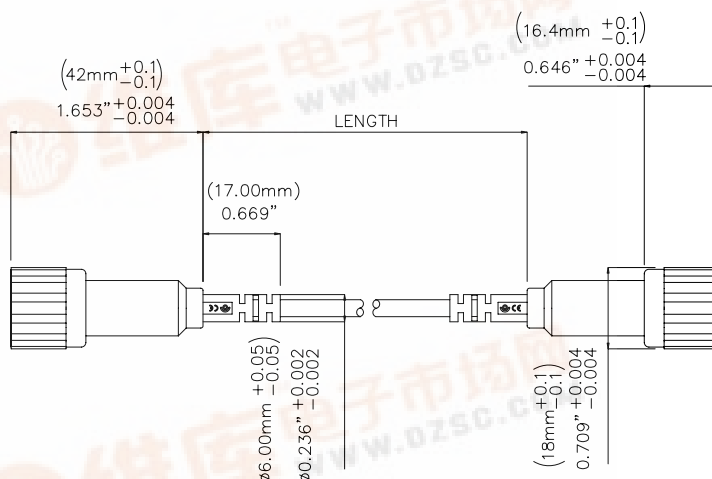

**Features**

- IEC Insulated BNC Male to BNC Male 50 ohm cable.

**Materials**

- Connector body: Nickel plated Brass
- Center Contact: Gold Plated Brass
- Dielectric: White PTFE

**Ordering Information**

Model: 72926-C-Length

Available Lengths: 40 inches (-40) or 80 inches (-80)

**Specifications**

|             |                              |
|-------------|------------------------------|
| Max Current | 3 A Max                      |
| Max Voltage | 500 V CAT I<br>150 V CAT III |
| Cable       | 50 Ω                         |

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

