


查询"SK3"供应商

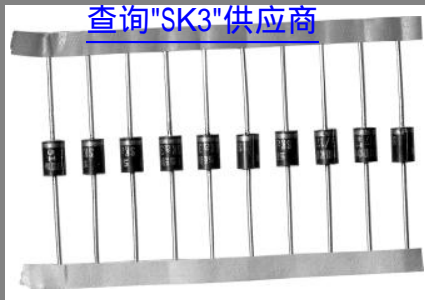

## Axial Lead Diode

## Rectifier Diode

SK 3

### Features

- Reverse voltages up to 1600 V
- Taped for automatic insertion
- Available with formed leads on request
- Plastic material used carries Underwriter Laboratories flammability classification 94V-0

### Typical Applications






- All-purpose rectifier diodes

$V_{RSM}$ V	$V_{RRM}$ V	$I_{FRMS} = 6,7$ A (maximum value for continuous operation) $I_{FAV} = 3$ A (sin. 180; $T_r = 90$ °C)	
1000	1000	SK 3/10	
1200	1200	SK 3/12	
1400	1400	SK 3/14	
1600	1600	SK 3/16	

Symbol	Conditions	Values	Units
$I_{FAV}$	sin. 180; L = 10 mm; $T_r = 85$ (100) °C	3,3 (2,7)	A
$I_{FSM}$	$T_{vj} = 25$ °C; 10 ms	180	A
	$T_{vj} = 150$ °C; 10 ms	150	A
$i^2t$	$T_{vj} = 25$ °C; 8,3 ... 10 ms	162	A <sup>2</sup> s
	$T_{vj} = 150$ °C; 8,3 ... 10 ms	112,5	A <sup>2</sup> s
$V_F$	$T_{vj} = 25$ °C; $I_F = 10$ A	max. 1,2	V
$V_{(TO)}$	$T_{vj} = 150$ °C	max. 0,85	V
$r_T$	$T_{vj} = 150$ °C	max. 30	mΩ
$I_{RD}$	$T_{vj} = 150$ °C; $V_{RD} = V_{RRM}$	max. 0,6	mA
$Q_{rr}$	$T_{vj} = 150$ °C; $-di_F/dt = 10$ A/μs; $I_F = 10$ A	25	μC
$R_{th(j-r)}$	L = 10 mm	18	K/W
$R_{th(j-a)}$	PCB 50 x 50 mm	60	K/W
$T_{vj}$		- 40 ... + 150	°C
$T_{stg}$		- 40 ... + 150	°C
$T_{sold}$	max. 10 s; L > 9mm	250	°C
$V_{isol}$		-	V~
a		5 * 9,81	m/s <sup>2</sup>
m	approx.	1	g
Case	1500 diodes per reel	E 34	




查询"SK3"供应高

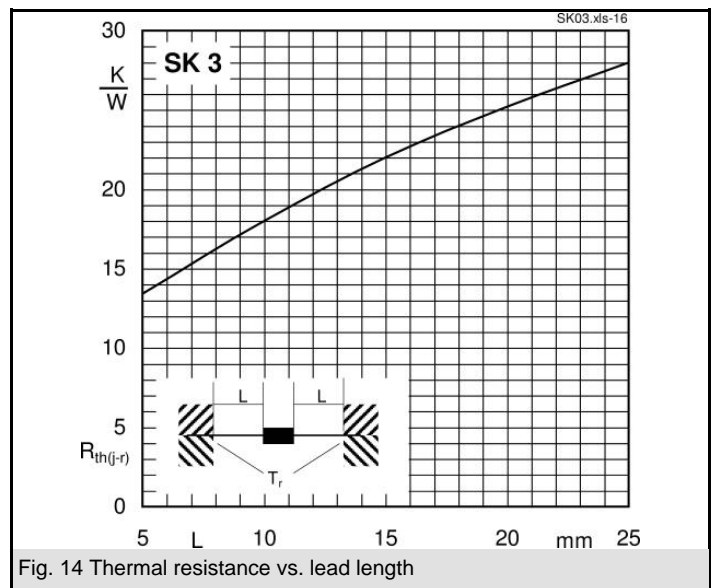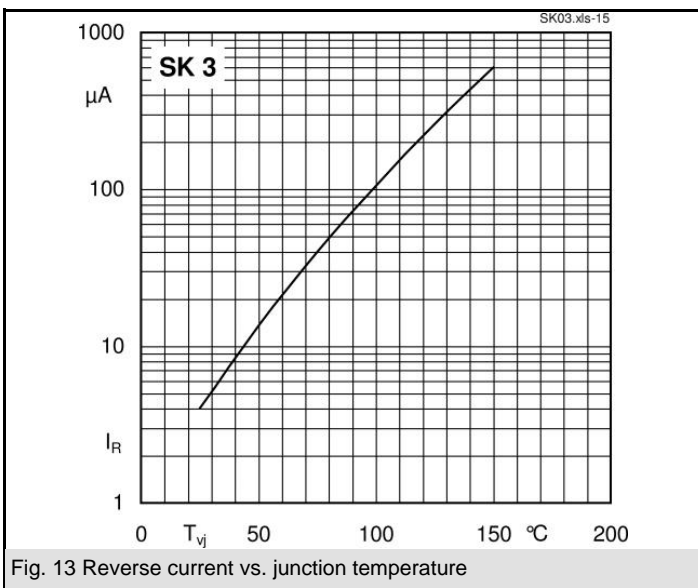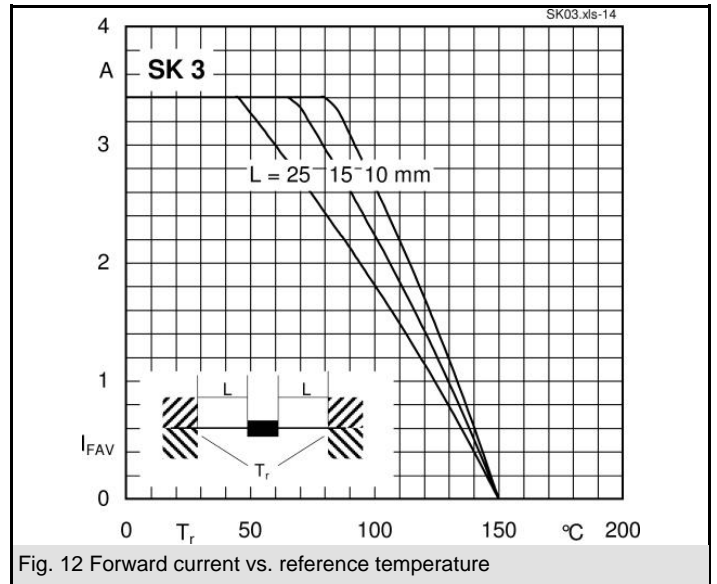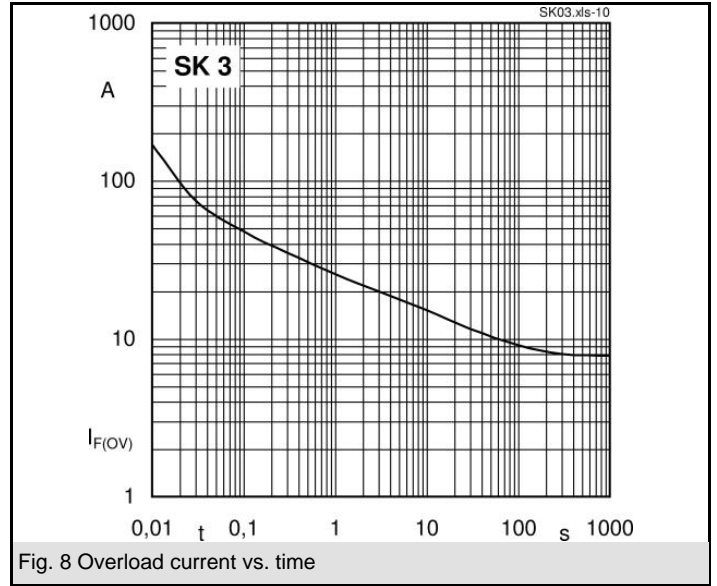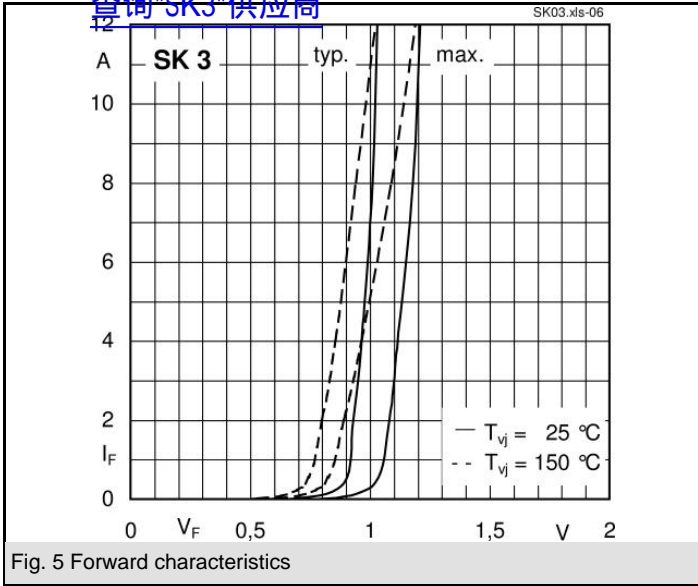

[查询"SK3"供应商](#)

Dimensions in mm

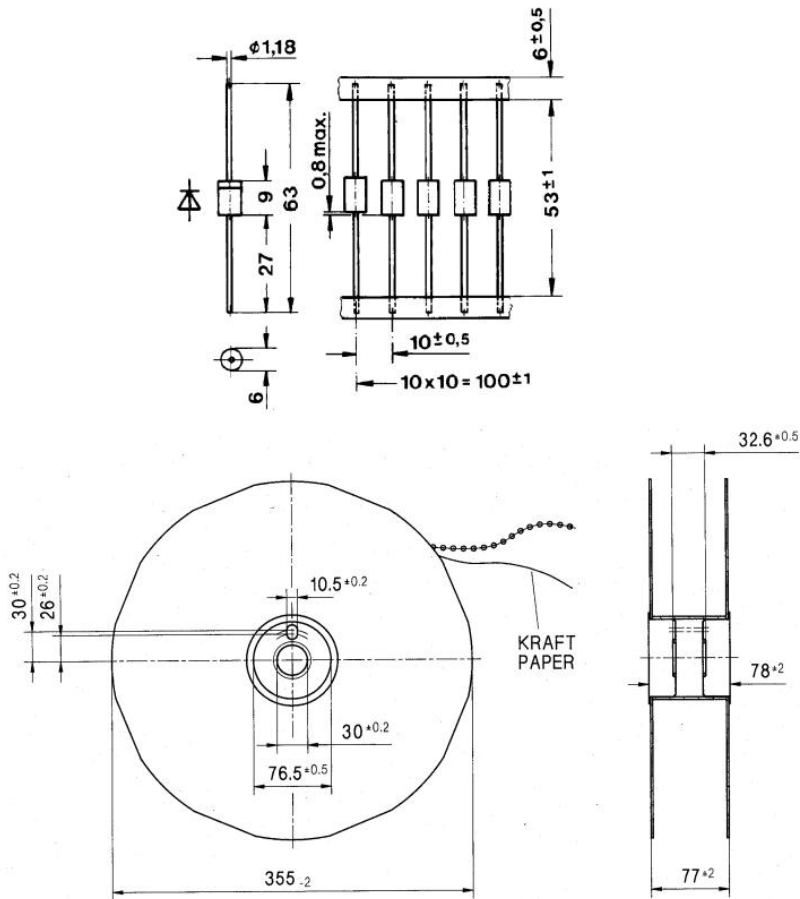

Case E 34

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.