


## Model 4846 SMA (Male) Each End Cable Assembly

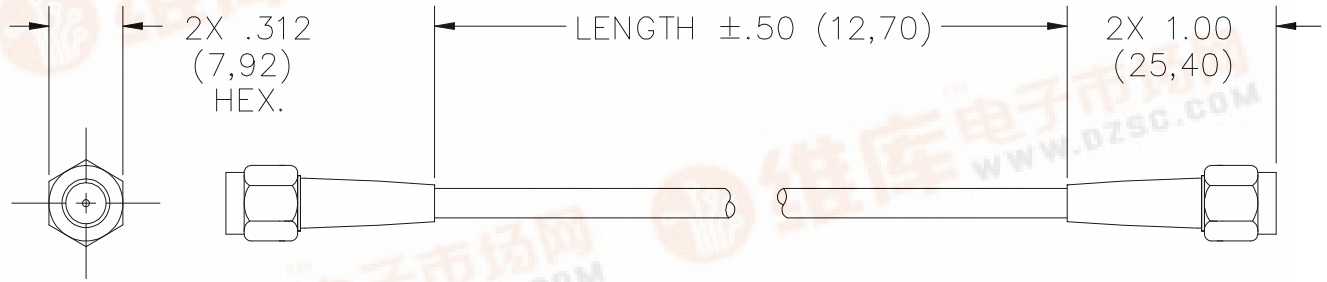

### FEATURES:

- RG142B/U cable is Pomona's premium cable, double shielded, high temperature and 12.4 GHz rating
- RG316/U is Pomona's mid performance cable. The cable is single shield, high temperature and 3.0 GHz rated.
- RG174/U is Pomona's most economically SMA cable assembly. Cable is a single shield with 1.0 GHz frequency rating.

### MATERIAL/RATINGS:

SMA (Male) Connectors: Body/Fittings: Stainless Steel, Finish – Passivated Steel  
 Contacts: Brass, Gold Plated  
 Impedance: 50 Ohms

| Cable               | RG174/U                      | RG316/U   | RG142B/U  |
|---------------------|------------------------------|---|---|
| Impedance (Nom.):   | 50 Ohms                      | 50 Ohms   | 50 Ohms   |
| Cap. PF/ft.         | 30.8                         | 29.0  | 29.0  |
| Loss (Max.):        | .45 dB/ft. @ 1 GHz           | .56 dB/ft. @ 3 GHz                                    | .67 dB/ft. @ 12.4 GHz                           |
| Temperature (Max.): | +85°C (+185°F)               | +200°C (+392°F)                                       | +200°C (+392°F)                                 |
| Jacket:             | Vinyl, Color: Black          | FEP, Color: Tinted Brown                              | FEP, Color: Tinted Brown                        |
| Cable Marking:      | POMONA 4846-K- Length        | POMONA 4846-BB-Length                                 | POMONA 4846-X-Length                            |
| Center Conductor:   | 26 AWG (7 x .34) bare copper | 26 AWG (7 x .0067) silver coated copper covered steel | 18 AWG solid silver coated copper covered steel |

### ORDERING INFORMATION: Model 4846-Cable Code-Length in Inches

Cable Codes: K = RG174/U, BB – RG316/U, X – RG142B/U

Standard Lengths: 12" (30,48 cm)\*, 24" (61cm), 48" (121,92 cm), & 60" (152,4 cm)

\*Available for "X" only

Additional lengths can be quoted upon request.

Ordering Example: 4846-X-24, Cable is RG142B/U, Length: 24" (61 cm)

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844  
 Technical Support: technicalsupport@pomonatest.com

www.pomonaelectronics.com

