




SM531-1 and PT532-1 ADSL Line Transformers



Features

- For use with Analog Devices AD20msp918 ADSL Chipset
- Excellent Total Harmonic Distortion (THD) performance in a small size
- Both SMD and Thru-Hole Package Version
- Designed to meet UL1950 and EN60950 Supplementary Insulation requirements for voltages up to 250Vrms maximum

ELECTRICAL SPECIFICATIONS AT 25°C:



OPERATING TEMP: 0°C TO 70°C

URNS RATIO	1 : 1.27±2%
OCL @10kHz, 0.1V	
(1-4) WITH (2-3) SHORTED	1.80mH MIN
(10-7) WITH (8-9) SHORTED	2.90mH MIN
LEAKAGE INDUCTANCE @100kHz 0.1V	
(1-4) WITH (2-3), (8-9), (10-7) SHORTED	7.5μH MAX
LONGITUDINAL BALANCE 30kHz – 1.1MHz	50dB MIN
INSERTION LOSS @100kHz	<0.5dB
ISOLATION VOLTAGE (MAX)	1500 Vrms
LOAD RESISTANCE	100Ω
DC RESISTANCE (1-4), (10-7)	2Ω MAX
THD LINEARITY @30kHz	-80dB TYP
PACKAGE	SMT

OUTLINE DIMENSIONS

SMT

THT

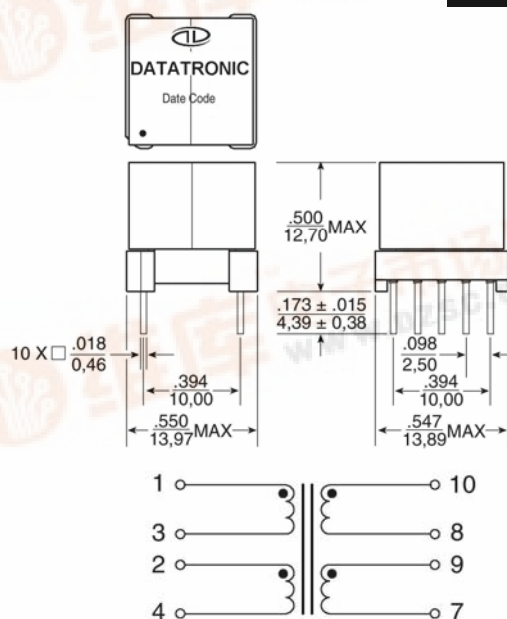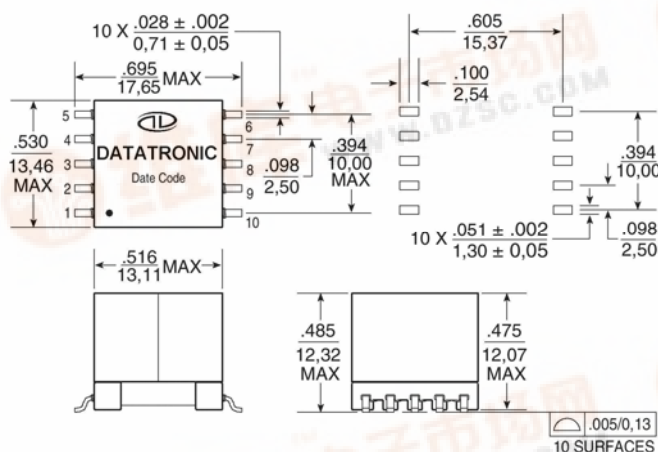

SCHEMATIC

NOTES:

1. Dimensions are shown in inches/millimeters
Unless otherwise specified, tolerance = Inches: ±0.010
= Millimeters: ±0,25
2. For non-RoHS parts replace SM prefix with 42- (e.g. SM531-1 becomes 42-531-1)
3. Terminal finish is compliant to RoHS requirements. Solder in accordance with J-STD-020C.

DATATRONICS:

28151 Highway 74, Romoland, CA 92858 Tel: 951-928-7700 Toll Free: 888-889-5391 Fax: 951-928-7701

Email: ddisales@datatronics.com

499 King's Road, Hong Kong Tel: (852) 2562 3858, (852) 2564 8477 Fax: (852) 2565 7214, (852) 2563 1290

All specifications are subject to change without notice.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn