



ENERGIZER NO. L91

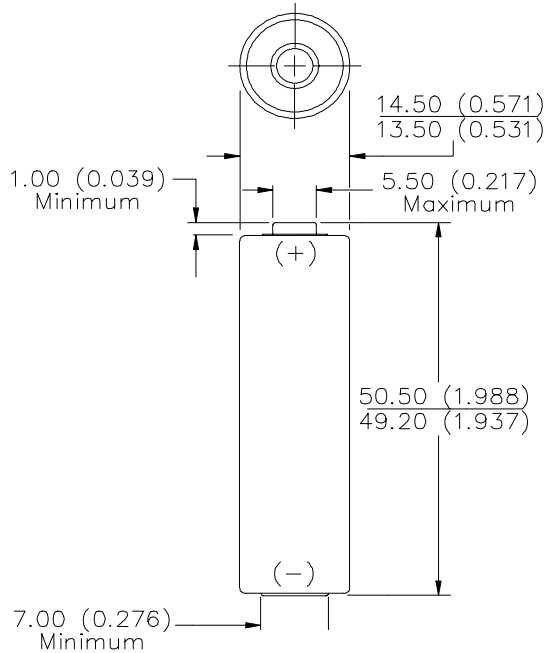


Chemical System:	Lithium Lithium/Iron Disulfide (Li/FeS ₂)
Designation:	ANSI-15LF, IEC-FR6
Battery Voltage:	1.5 Volts
Average Weight:	14.5 grams (0.5 oz.)
Volume:	8.0 cubic centimeters (0.5 cubic inch)
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Average Capacity:	3000 mAh (to 1.0 volts) (Rated capacity at 200 mA drain.)
Max Discharge:	2 Amps Continuous 3 Amps Pulse (2 seconds max)
Lithium Content:	Less than 1 gram (0.04 oz.) per cell
Jacket:	Non-magnetic Plastic Label
Transportation:	Meets requirements of 49CFR 173.185 (b)


CONSTANT CURRENT DISCHARGE Typical Service

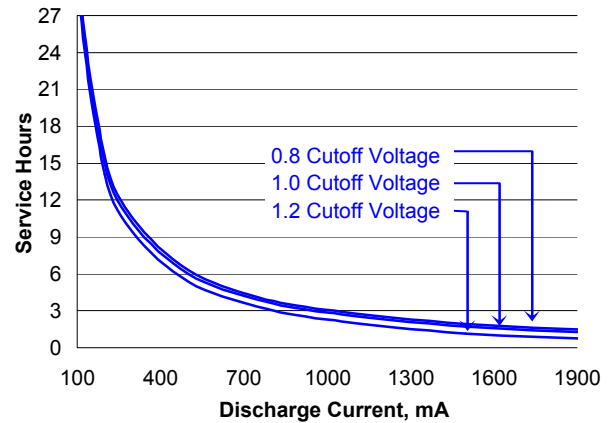

CONSTANT POWER DISCHARGE Continuous @ 20°C to 0.9 volts

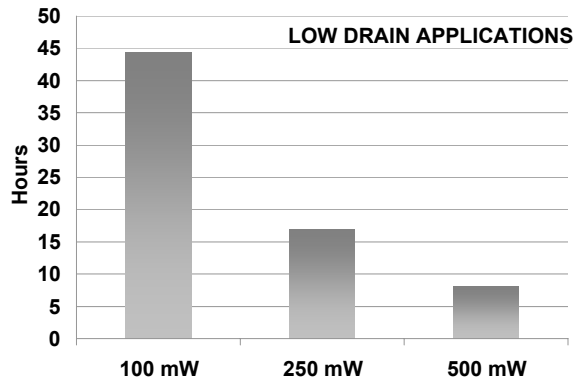



CONSTANT POWER DISCHARGE Continuous @ 20°C to 1.0 volts

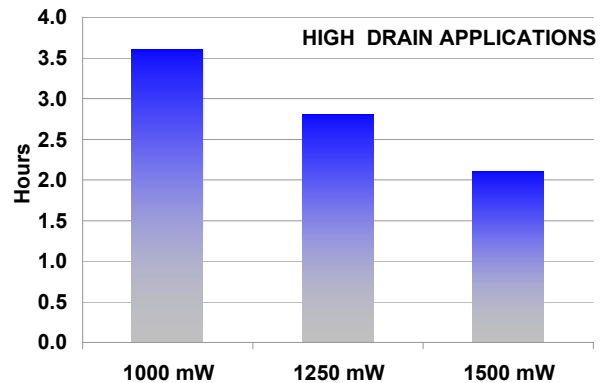







查询"L91"供应商

ENERGIZER NO. L91

Temperature Effects

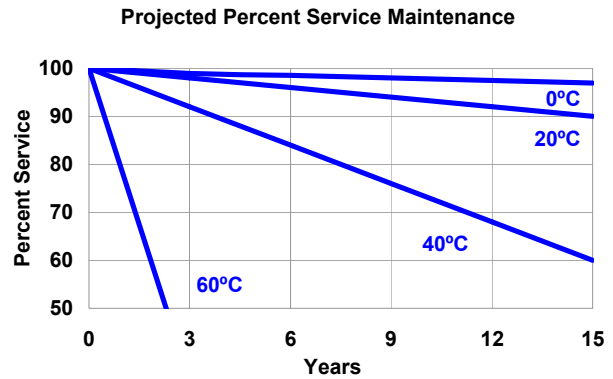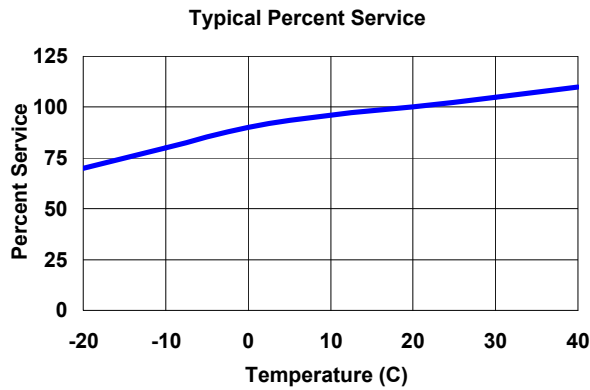

Industry Standard Tests @ 20° C

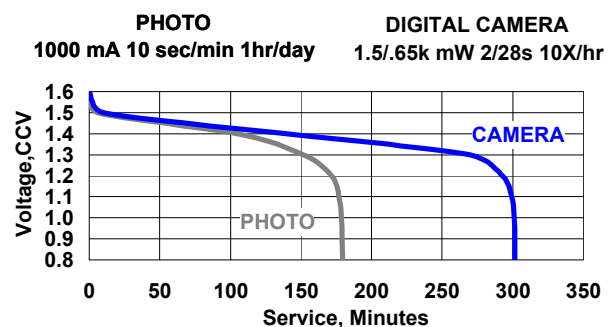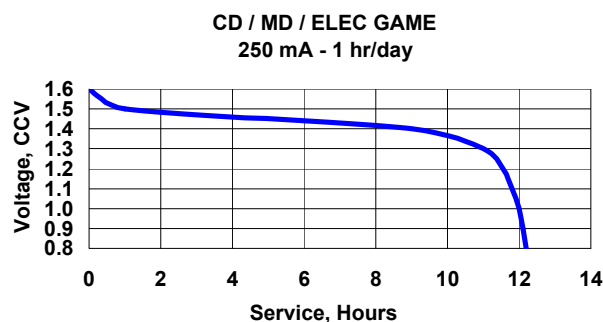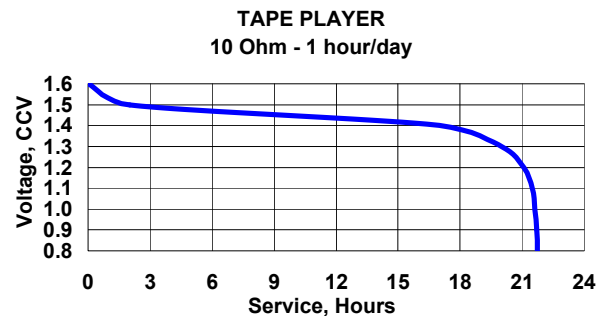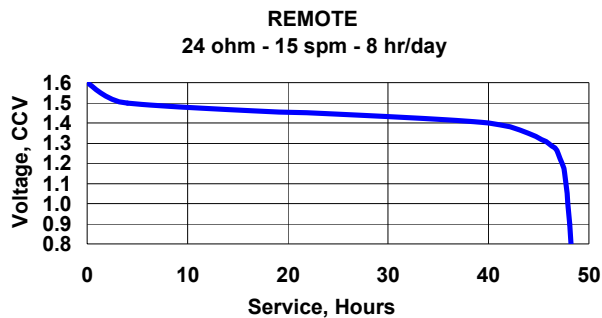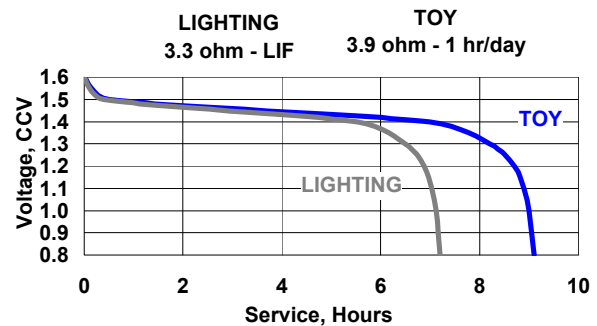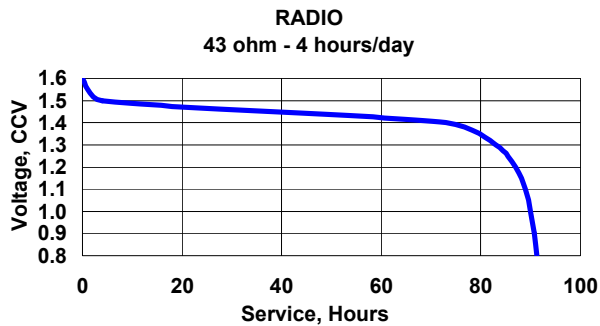

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

© Energizer - All Rights Reserved