



SPECIFICATION FOR APPROVAL

REF: 20090825-B
查詢 0034.6617 供應商


PAGE: 1

PROD.	SHIELDED SMD	ABC'S DWG No.	HP1206□□□□2□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM No.	

I . MECHANICAL DIMENSIONS :


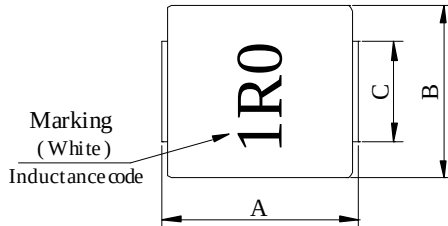


A :	13.5±0.4	m/m
B :	12.5±0.3	m/m
C :	4.00±0.3	m/m
D :	6.50 max.	m/m
E :	2.00 ±0.5	m/m
F :	5.00 typ.	m/m
G :	8.00 typ.	m/m
H :	14.0 typ.	m/m



(PCB Pattern)

II . SCHEMATIC DIAGRAM :




III . MATERIALS LIST :

- a . Core : Iron powder
- b . Wire : Enamelled copper wire
- c . Cilp : Cu / Ni /Sn
- d . Remark : Products comply with RoHS' requirements

IV . GENERAL SPECIFICATION :

- a . Storage temp. : -55°C ~ +125°C
- b . Operating temp. : -55°C ~ +125°C
(Temp. rise included)
- c . Resistance to solder heat : 260°C. 10 secs.

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

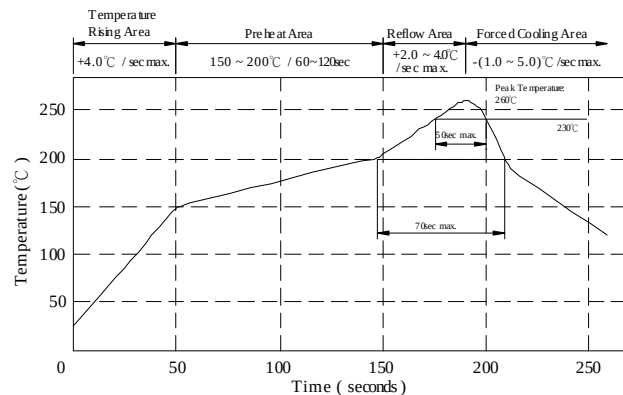

AR-001A

ABC 千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

查询#003466175供应商

PAGE: 2

PROD.	SHIELDED SMD	ABC'S DWG No.	HP1206□□□□2□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM No.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Isat(A) typ.	Irms(A) typ.	RDC ($m\Omega$)	
				max.	typ.
HP1206R10M2□-□□□	0.10 $\pm$ 20 %	120.0	60.0	0.5	0.45
HP1206R15M2□-□□□	0.15 $\pm$ 20 %	118.0	55.0	0.6	0.55
HP1206R22M2□-□□□	0.22 $\pm$ 20 %	112.0	53.0	0.7	0.65
HP1206R30M2□-□□□	0.30 $\pm$ 20 %	72.0	48.0	0.8	0.70
HP1206R33M2□-□□□	0.33 $\pm$ 20 %	65.0	46.0	0.9	0.85
HP1206R40M2□-□□□	0.40 $\pm$ 20 %	64.0	44.0	1.0	0.90
HP1206R47M2□-□□□	0.47 $\pm$ 20 %	63.0	41.0	1.2	1.00
HP1206R56M2□-□□□	0.56 $\pm$ 20 %	62.0	37.0	1.4	1.20
HP1206R68M2□-□□□	0.68 $\pm$ 20 %	60.0	35.0	1.6	1.40
HP1206R82M2□-□□□	0.82 $\pm$ 20 %	50.0	33.0	1.9	1.60
HP12061R0M2□-□□□	1.00 $\pm$ 20 %	49.0	32.0	2.0	1.70
HP12061R2M2□-□□□	1.20 $\pm$ 20 %	48.0	30.0	2.5	2.00
HP12061R5M2□-□□□	1.50 $\pm$ 20 %	45.0	27.0	3.0	2.50
HP12061R8M2□-□□□	1.80 $\pm$ 20 %	41.0	24.0	3.2	3.00
HP12062R2M2□-□□□	2.20 $\pm$ 20 %	40.0	22.0	4.2	3.50
HP12063R3M2□-□□□	3.30 $\pm$ 20 %	35.0	18.0	6.8	6.00
HP12064R7M2□-□□□	4.70 $\pm$ 20 %	30.0	13.5	11.2	9.50
HP12065R6M2□-□□□	5.60 $\pm$ 20 %	26.5	13.5	12.0	11.00
HP12066R8M2□-□□□	6.80 $\pm$ 20 %	16.5	11.5	14.0	13.00
HP12068R2M2□-□□□	8.20 $\pm$ 20 %	16.0	10.5	15.5	14.50
HP1206100M2□-□□□	10.0 $\pm$ 20 %	15.5	10.0	17.0	16.00
HP1206120M2□-□□□	12.0 $\pm$ 20 %	14.0	9.0	30.0	28.00

- 1). □ : Packaging information ... ☐A : Bulk ☐B : Taping Reel
- 2). "-□□□":Reference code
- 3). Measured frequency of inductance is 100 KHz / 0.25V
- 4). Isat base on inductance drop 20% typ. of L value at 20°C
- 5). Irms base on temp. rise 40°C typ.

AR-001A



SPECIFICATION FOR APPROVAL


查詢 0034.8817 供應商

PAGE: 3


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No.	HP1206□□□□2□-□□□
		ABC'S ITEM No.	

VI . PACKAGING INFORMATION :

(1) Configuration

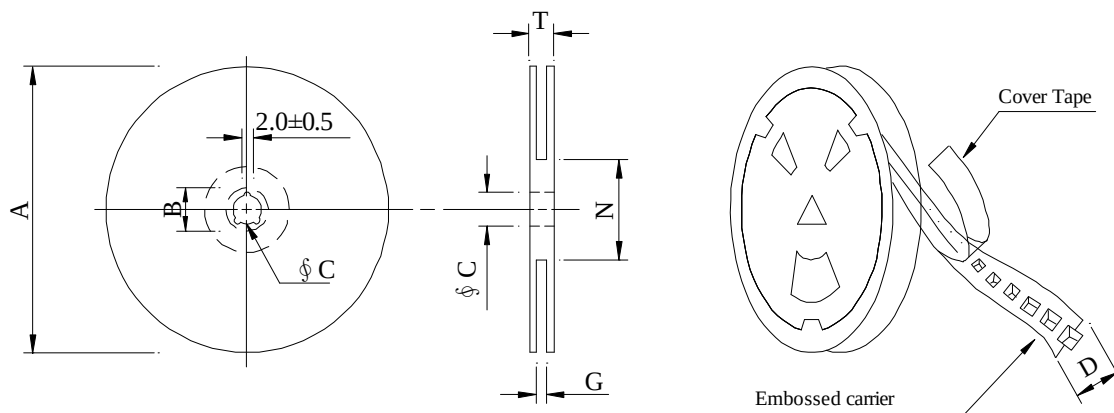

※Carrier tape width : D

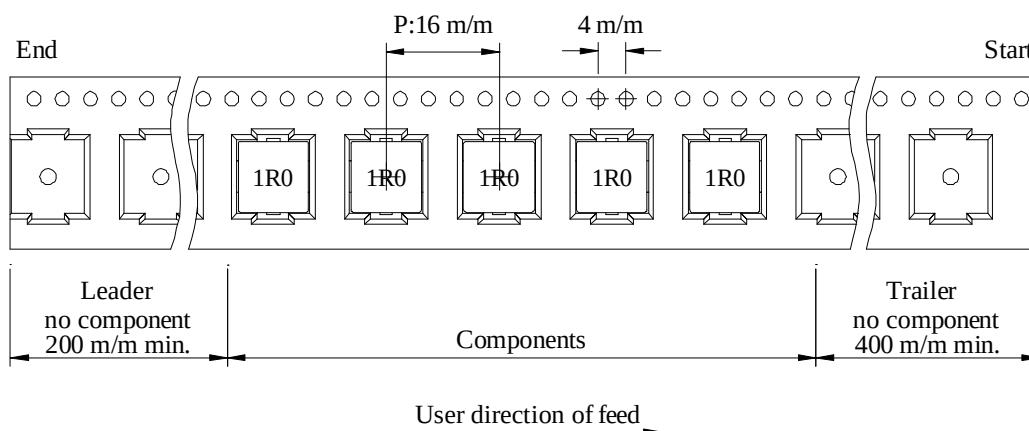

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
HP1206	500	3,200	13 - 24	2,000	14.0	40 x 40 x 24

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.


SPECIFICATION FOR APPROVAL

查询"00346617"供应商
REF.: 20090825-B

PAGE: 4

PROD.	SHIELDED SMD	ABC'S DWG No.	HP1206□□□□2□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM No.	

VII . DWGING NUMBER EXPRESSION :

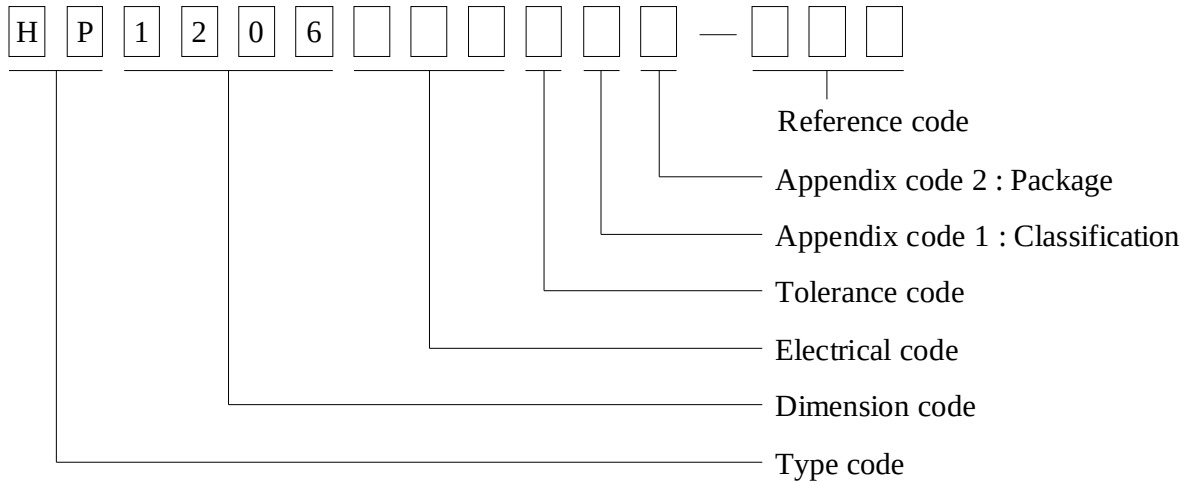

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package QTY	Remark
A	T.B.D.	T.B.D	
B	T / R (Reel package)	500 pcs	

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

查詢 003400617 供應商

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No.	HP1206□□□□2□-□□□
		ABC'S ITEM No.	

Ⅷ . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 95% of the terminal electrode Shall be covered With fresh solder.	Preconditioning: 150℃ /16Hrs±30min Dry Bake Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. :245±5℃ Flux : Rosin Dip time: 5±0.5sec
Thermal shock test (Temp. cycle)	Electrical oharacteristics shall not change more than ±20%	Room temp. 15 minutes → -55 ℃ 30 minutes Room temp. 15 minutes → +125 ℃ 30 minutes Total : 50 cycles
Humidity Test		Temperature : 40±2℃ Humidity : 90±5% Time : 1000 hours
High temp. Resistance test		Temperature : 125±5℃ Applied current : Per spec. Time : 96 hours

AR-001A

SPECIFICATION FOR APPROVAL

查询"0034 6617"供应商
REF: 20090825-B

PAGE: 6

PROD.	SHIELDED SMD	ABC'S DWG No.	HP1206□□□□2□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM No.	

IX . UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component
JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	—	Polyamideimide	MW35C	200
EILOCKY	—	Polyesterimide	—	Polyamide	—	180
EILOCKW	—	Polyesterimide	—	Modified Epoxy	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	—	Polyamide	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	—	Nylon	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	—	Nylon	MW27-C	155
SF.FLY@	—	Modified Polyester	—	Nylon	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	—	Modified Polyamide	—	155
SF.EILOCKY#	—	Polyesterimide	—	Polyamide	—	180
SF.EILOCKBS	—	Polyesterimide	—	Modified Polyamide	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	—	Polyamide	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	—	Nylon	MW28-C	130
UEY-2	—	Polyurethane	—	Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.

LZ - Signifies magnd wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 聚世偉業, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2/E174837
September 8, 2000

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.