


5x20 mm / No. 194

This product is not recommended for new designs. Please refer to Littelfuse No. 216.



Dimensions (mm)

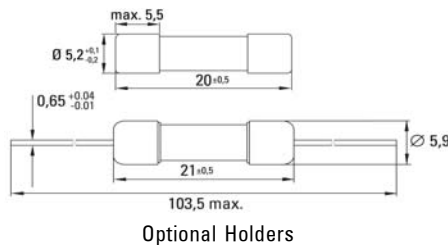

only 2 A / 2.5 A / 4 A / 8 A / 10 A

Limits for Pre-arcing Time

Rated Current	1.5 x I _N	2.1 x I _N	2.75 x I _N	4 x I _N	10 x I _N
200 mA ... 3.15 A	> 1 h	< 30 min	10 ms ... 2 s	3 ms ... 300 ms	< 20 ms
4.00 A ... 6.30 A	> 1 h	< 30 min	10 ms ... 3 s	3 ms ... 300 ms	< 20 ms
8.00 A ... 10.00 A	> 30 min	< 30 min	10 ms ... 3 s	3 ms ... 300 ms	< 20 ms
12.50 A ... 16.00 A	> 1 h	< 30 min	40 ms ... 20 s	10 ms ... 1 s	< 30 ms

Permissible continuous operating current is ≤ 100 % at ambient temperature of 23 °C (73.4 °F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I _N (W) max. (mV)	Power Dissipation 1.5 x I _N (W) max. (W)	Melting Integral 10 x I _N (W) max. (A ² s)	Approvals VDE SEMKO cULus CCC
200 mA ¹	0200	250 V		3500	1.2	0.007	• • p
250 mA ¹	0250	250 V		1000	0.8	0.013	• • p
315 mA ¹	0315	250 V		950	0.8	0.015	• • • p
400 mA ¹	0400	250 V		900	0.9	0.027	• • • p
500 mA ¹	0500	250 V		850	1.0	0.041	• • • p
630 mA ¹	0630	250 V		800	1.1	0.075	• • • p
800 mA ¹	0800	250 V		750	1.3	0.12	• • • p
1.00 A	1100	250 V		700	1.4	0.29	• • • •
1.25 A	1125	250 V		650	1.6	0.7	• • • •
1.60 A	1160	250 V		500	1.8	1.0	• • • •
2.00 A	1200	250 V		400	2.0	1.8	• • • •
2.50 A	1250	250 V		350	2.3	3.0	• • • •
3.15 A	1315	250 V		300	2.8	7.8	• • • •
4.00 A	1400	250 V		270	3.5	15	• • • •
5.00 A	1500	250 V		250	3.7	35	• • • •
6.30 A	1630	250 V		200	4.0	75	• • • •
8.00 A	1800	250 V		150	3.8	70	p p •
10.00 A	2100	250 V		170	3.9	150	p p •
12.50 A ¹	2125	250 V	750 A / 250 V AC 50-60 Hz cos φ = 0.7-0.8	100	4.0	250	G * •
16.00 A ¹	2160	250 V	1000 A / 125 V AC cos φ = 1	90	4.5	480	G * •

¹ Not mentioned in the fuse standards.

* test report available
G Expert Report
p=pending

Specifications are subject to change without notice.

IEC 60127-2/I, 250V, F

Time-Current Characteristic
Quick Acting (F)

Standard
IEC 60127-2/I
DIN 41660

Approvals
VDE
SEMKO
cULus Recognized
CCC

Features

High breaking capacity
Direct solderable or plug-in versions
Internationally approved
Worldwide availability

WebLinks

Further info see:
www.wickmanngroup.com

Further application info see fuseology:
www.wickmanngroup.com/download/fuseology.pdf

Specifications

Packaging

000: Bulk (1000 pcs.)
002: Bulk (20x10 pcs.)
043: With mounted holder - Tape/Reel (1250 pcs.) on request

Materials

Tube: Ceramic
End Caps: Nickel-plated brass
Optional Holders: Nickel-plated caps
Tin-plated copper wires

Operating Temperature

-40 °C to +85 °C (consider de-rating)

Climatic Category

-40 °C / +85 °C / 21 days
(IEC 60068-1,-2-1,-2-2,-2-78)

Stock Conditions

+10 °C to +60 °C
relative humidity ≤ 75 % yearly average,
without dew, maximum value for 30 days-95 %

Vibration Resistance

24 cycles at 15 min. each (EN 60068-6)
10 - 60 Hz at 0.75 mm amplitude
60 - 2000 Hz at 10 g acceleration

Solderability

260 °C, ≤ 3 s (Wave)
350 °C, ≤ 1 s (Soldering iron)

Soldering Heat Resistance

260 °C, 10 s (IEC 60068-2-20)

Marking

Ⓜ, F, Current Rating, H, 250 V, Approvals

Unit Weight

1.2 g (approx.)
2.2 g (with mounted holders)



Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		194		

WebSite

Europe Tel: +49 2302 662-107
E-mail: sales@wickmann.com

Americas Tel: +1 404 699-7820

E-mail: service@wickmannusa.com


Asia Tel: +852 26 14-1108

E-mail: sales@wickmann.com.hk

China Tel: +86 21 6432 5146

E-mail: sales@wickmann.cn

5x20 mm / No. 194

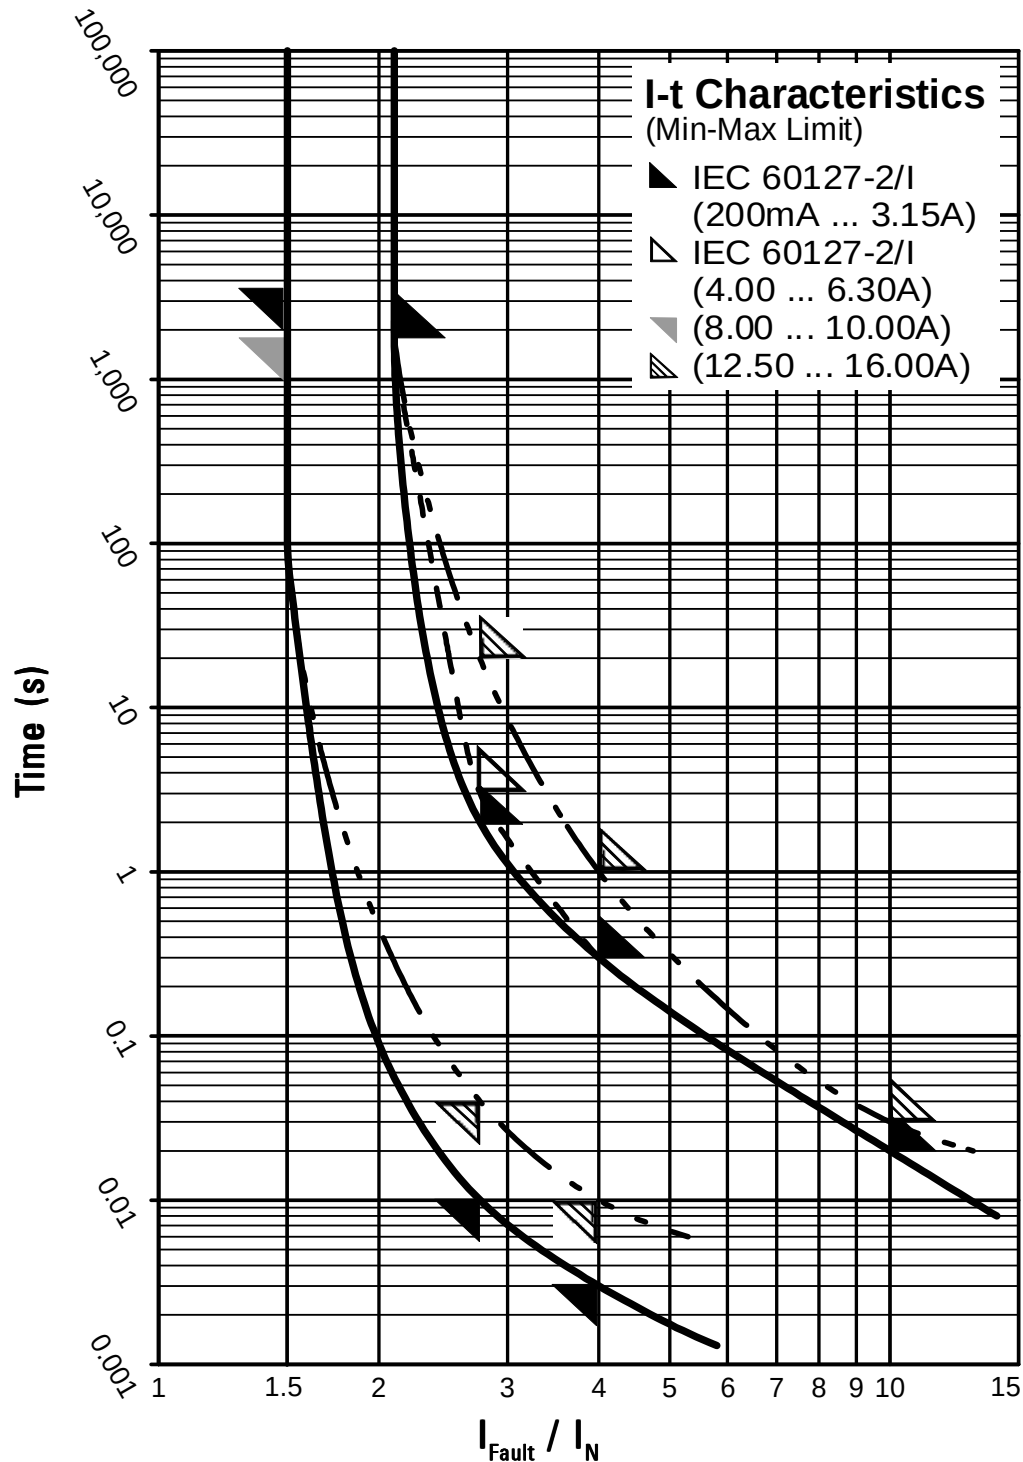

Contact WICKMANN for individual I-t curves