


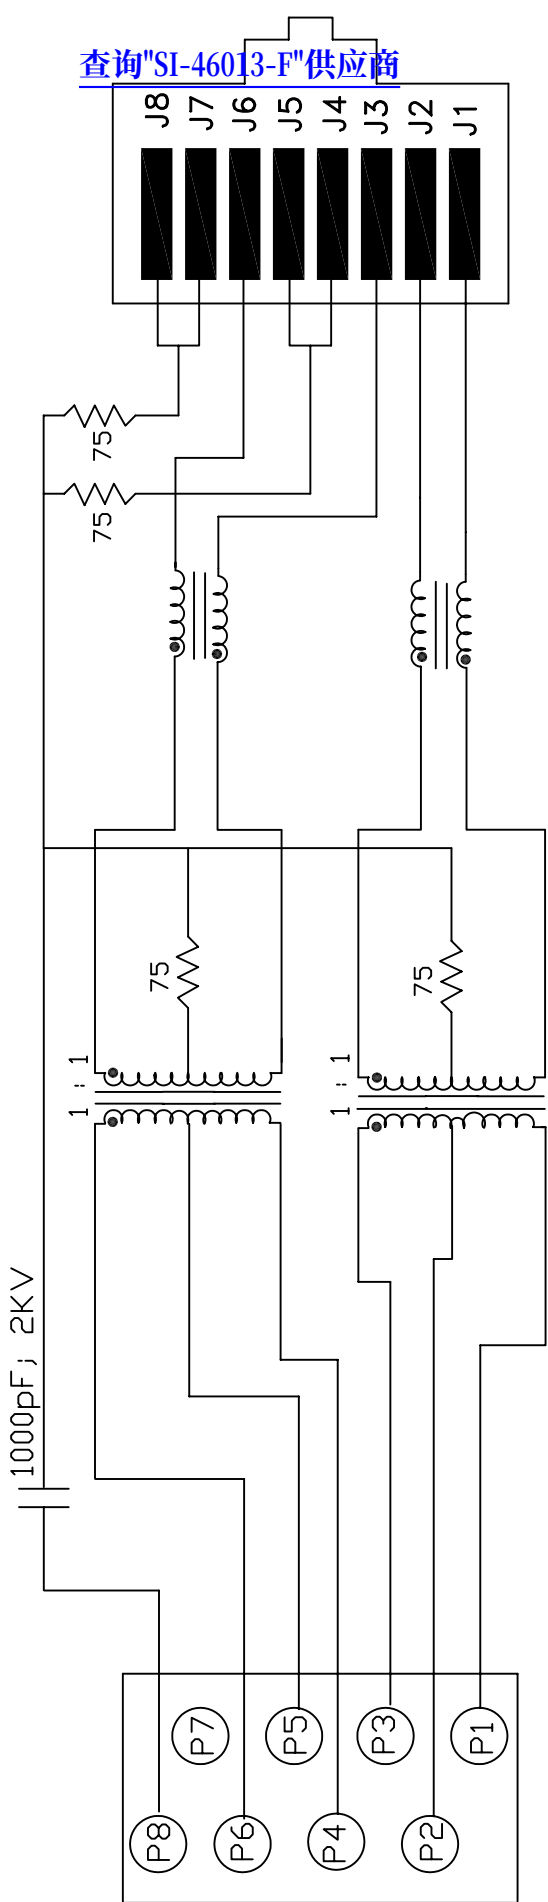

ELECTRICAL SPECIFICATIONS:

1.0 TURNS RATIO: (P6-P5-P4) : (J6-J3)  
(P3-P2-P1) : (J2-J1)

2.0 INDUCTANCE: (P6-P4)  
(P3-P1)

3.0 LEAKAGE INDUCTANCE: P6-P4 (WITH J6 AND J3 SHORT)  
P3-P1 (WITH J2 AND J1 SHORT)

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3)  
(P3,P2,P1) TO (J2,J1)

5.0 DC RESISTANCE: (J6-J3)=(J2-J1)

: 1CT : 1CT± 3%  
: 1CT : 1CT ± 3%

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias  
: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias


: 0.3 MAX. @ 1MHZ  
: 0.3 MAX. @ 1MHZ

: 30pf MAX @ 1MHZ  
: 30pf MAX. @ 1MHZ

: 1.2 ohms Max.

NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.



Bel Stewart Connector  
11118 Susquehanna Trail, South  
Glen Rock, Pa 17327-9199  
717.234.7512



http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET  
1 OF 3

DRAWING NO.

SI-46013-F

REV.

04

6.0 RETURN LOSS:  $\langle P6-P4 \rangle = 100 \text{ } \Omega \text{HMS}$  AND  $\langle P1-P3 \rangle = 100 \text{ } \Omega \text{HM REF.}$

1MHz TO 30MHz

60MHz TO 80MHz

: 18dB MIN.

: 12dB MIN.

NOTE: 100  $\Omega \text{HMS}$  CONNECTED TO  $\langle J2-J1 \rangle$  OR  $\langle J6-J3 \rangle$ .

7.0 VOLTAGE WITHSTAND:

$\langle J1, J2 \rangle$  TO  $\langle P1, P3 \rangle$

$\langle J3, J6 \rangle$  TO  $\langle P4, P6 \rangle$

: 1500 VAC

: 1500 VAC

8.0 INSERTION LOSS:  $RS=RL=100 \text{ ohms}$

100KHz TO 100MHz

1.1 dB TYP

9.0 RISE TIME:  $RS=100 \text{ } \Omega \text{HMS}$  AND  $RL = 100 \text{ } \Omega \text{HMS}$

OUTPUT VOLTAGE = 1 V peak

PULSE WIDTH= 112ns

3.0 nS MAX

3.0 nS MAX

10.0 CROSS TALK:

1MHz TO 100MHz


40 dB TYP

11.0 COMMON TO COMMON MODE ATTENUATION:

30MHz TO 100MHz

35dB TYP


# LED POLARITY (ENLARGED VIEW)



SINGLE COLOR LED


| LED SPECIFICATION |            |                 |        |
|-------------------|------------|-----------------|--------|
| STANDARD LED      | WAVELENGTH | FORWARD V (MAX) | *(TYP) |
| GREEN             | 565 nm     | 2.5 V           | 2.2 V  |

\*WITH A FORWARD CURRENT OF 20 mA (TYP)

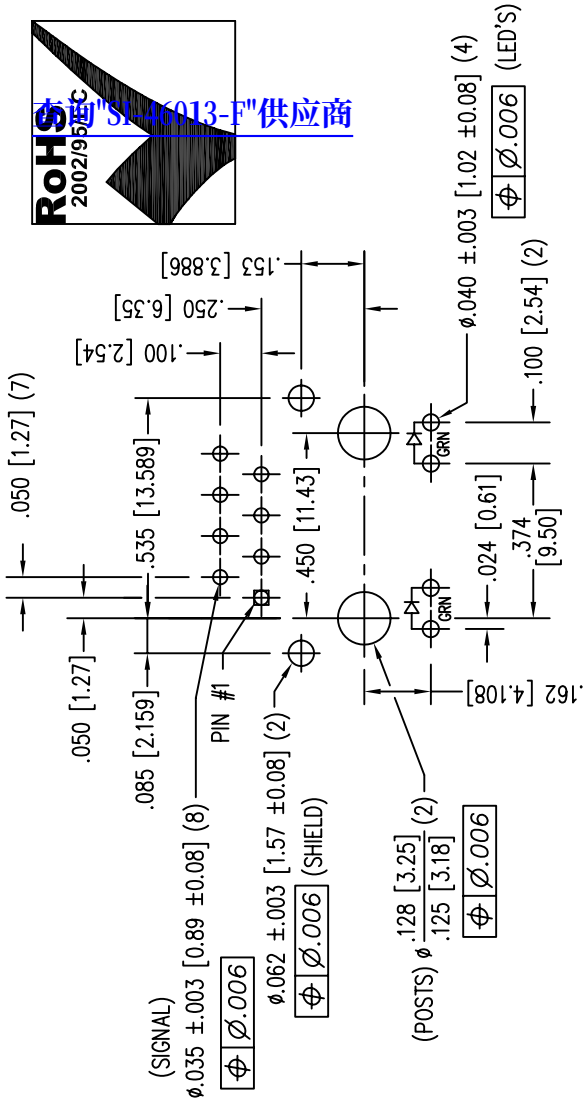

P.C.B. RECOMMENDED HOLE LAYOUT  
SEEN FROM COMPONENT SIDE

ALL CENTERLINE DIMENSIONS ARE BASIC.

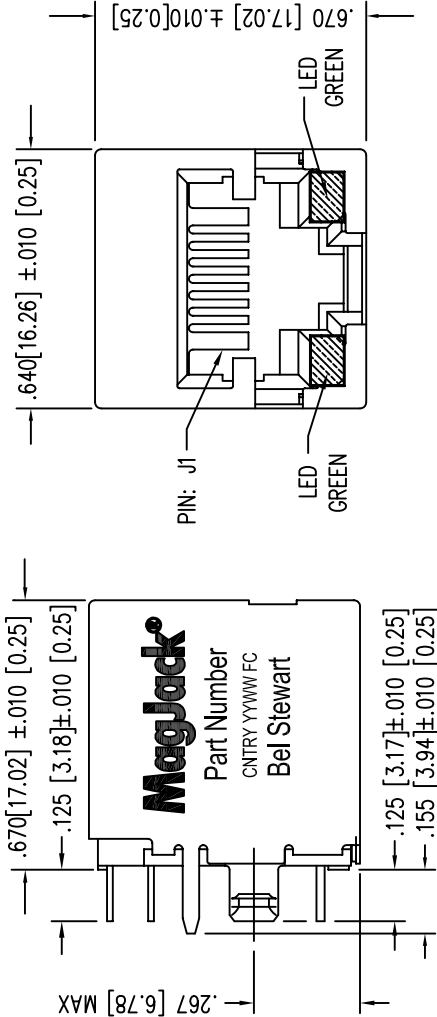

## NOTES:

- CONNECTOR MATERIALS:  
HOUSING: THERMOPLASTIC UL94 V-0  
CONTACT/SHIELD: COPPER ALLOY  
SHIELD PLATING: NICKEL OR TIN  
CONTACT PLATING: SELECTIVE GOLD,  
50 MICRO-INCHES MIN. IN CONTACT AREA.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.  
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

Bel Stewart Connector  
11118 Susquehanna Trail, South  
Glen Rock, Pa 17327-9199  
717.234.7512

**MagJack®**

<http://www.stewartconnector.com>

SHEET 3 OF 3 DRAWING NO. SI-46013-F REV. 01