


SEALED LEAD ACID BATTERIES: INDIVIDUAL DATA SHEET


查询"LC-R063R4P"供应商
LC-R063R4P

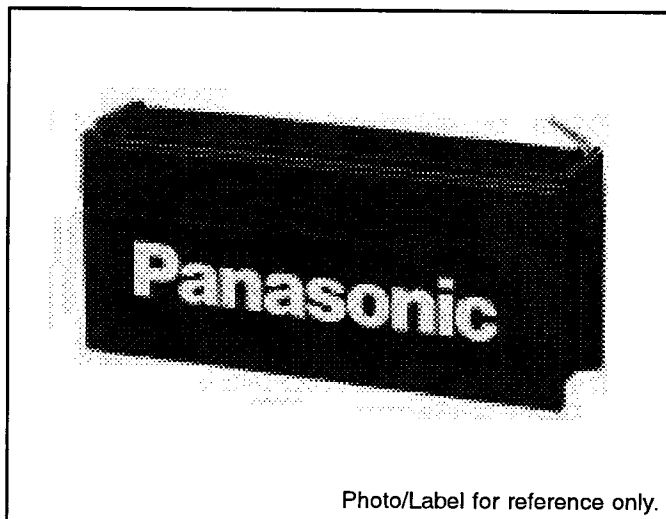

For main and standby power supplies.
Expected trickle life: 3-5 years at 25°C, Approx. 5 years at 20°C.

Dimensions (mm)

Terminal type: Faston 187

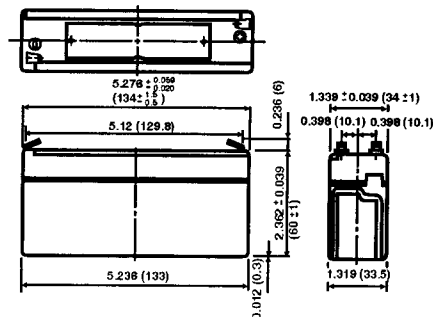


Battery case resin: Standard (UL94HB) Color is black.

Specifications

Nominal voltage		6V
Rated capacity (20 hour rate)		3.4Ah
Dimensions	Length	5.276 inches (134.0 mm)
	Width	1.339 inches (34.0 mm)
	Height	2.362 inches (60.0 mm)
	Total Height	2.598 inches (66.0 mm)
Approx. mass		1.37 lbs (0.62 kg)
Standard Terminals and Resin	UL94HB Faston 187	LC-R063R4P

Discharge characteristics 77°F (25°C) (Note)

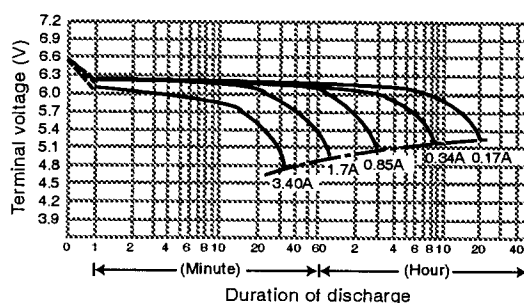

Characteristics

Capacity (note) 77°F (25°C)		20 hour rate (170mA)	3.4Ah
		10 hour rate (300mA)	3Ah
		5 hour rate (540mA)	2.7Ah
		1 hour rate (2100mA)	2.1Ah
		1.5 hour rate discharge Cut-off voltage 5.25 V	1.5A
Internal resistance		Fully charged battery 77°F (25°C)	Approx. 30mΩ
Temperature dependency of capacity (20 hour rate)		104°F (40°C)	102%
		77°F (25°C)	100%
		32°F (0°C)	85%
		5°F (-15°C)	65%
Self discharge 77°F (25°C)		Residual capacity after standing 3 months	91%
		Residual capacity after standing 6 months	82%
		Residual capacity after standing 12 months	64%
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	1.36 A or smaller
		Control voltage	7.25V to 7.45 V (per 6V cell 25°C)
	Trickle use	Initial current	0.51 A or smaller
		Control voltage	6.8V to 6.9V (per 6V cell 25°C)

(Note) The above characteristics data are average values obtained within three charge/discharge. Cycles not the minimum values.

Duration of discharge vs. Discharge current (Note)

