
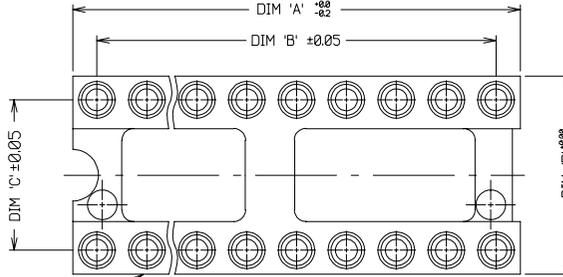


Customer Information Sheet


DRAWING No.- D2XXX-01 / D2XXX-21 SHEET 2 OF 2 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

[查询"741-085"供应商](http://www.harwin.com.cn)

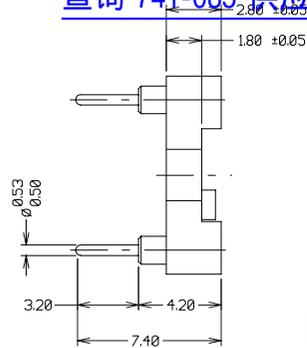

MOULDING: MATERIAL = 30% GLASS FILLED POLYESTER (UL94V-0) FINISH = BLACK

CONTACTS: MATERIAL - SHELL = BRASS CLIP = BERYLLIUM COPPER FINISH - 01 = SHELL: TIN, CLIP: GOLD 21 = SHELL: TIN, CLIP: GOLD FLASH

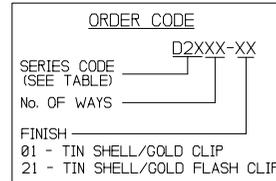



- * NOTES:
1. COMPONENTS SUPPLIED IN PLASTIC TUBES 537mm LONG.
2. RECOMMENDED MOUNTING HOLE SIZE = $\varnothing 0.80\text{mm}$

HARWIN PART No.	No. OF WAYS	STYLE	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'
D2806-XX	6	1	7.6	5.08	7.62	10.02
D2808-XX	8	1	10.1	7.62	7.62	10.02
D2814-XX	14	1	17.7	15.24	7.62	10.02
D2816-XX	16	1	20.3	17.78	7.62	10.02
D2818-XX	18	2	22.8	20.32	7.62	10.02
D2820-XX	20	2	25.3	22.86	7.62	10.02
D2922-XX	22	2	27.8	25.4	7.62	10.02
D2822-XX	22	2	27.8	25.4	10.16	12.6
D2824-XX	24	2	30.4	27.94	15.24	17.64
D2924-XX	24	2	30.4	27.94	7.62	10.02
D2724-XX	24	2	30.4	27.94	10.16	12.6
D2828-XX	28	2	35.5	33.02	15.24	17.64
D2832-XX	32	2	40.6	38.1	15.24	17.64
D2840-XX	40	3	50.8	48.26	15.24	17.64
D2948-XX	48	3	60.9	58.42	15.24	17.64
D2864-XX	64	4	81.2	78.74	22.86	25.4


SPECIFICATIONS:

- * MECHANICAL: INITIAL INSERTION FORCE = 3N MAX ($\varnothing 1.3\text{mm}$ \varnothing GAUGE) INITIAL WITHDRAWAL FORCE = 0.5N MIN ($\varnothing 1.3\text{mm}$ \varnothing GAUGE) RETENTION FORCE MEASURED WITH A POLISHED STEEL GAUGE DIAMETER $\varnothing 1.0\text{mm}$ AFTER 3 INSERTIONS OF A PIN WITH A DIAMETER $\varnothing 0.53\text{mm}$; $\varnothing 0.14\text{N}$ MIN MECHANICAL LIFE = 100 CYCLES MIN
- * ELECTRICAL: MAXIMUM WORKING CURRENT (1 TERMINAL) = 1 AMP RATED VOLTAGE = 100V RMS / 150V DC CONTACT RESISTANCE = 10 MILLIOHMS MAXIMUM INSULATION RESISTANCE = 10000 MEGOHMS DIELECTRIC STRENGTH = 1000V RMS MIN
- * GENERAL: OPERATING TEMPERATURE = -55°C TO 125°C
- * FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C004XX (LATEST ISSUE).


STYLE '1'



STYLE '2'

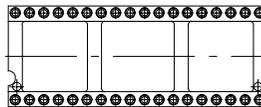

STYLE '3'

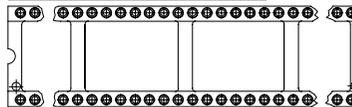

STYLE '4'

I2	29.10/97	4118
I1	11/09/96	3461
ISS.	DATE	C/N
APPROVED:		
CHECKED:		
DRAWN: A LIOTTA		
CUSTOMER REF.		
ASSEMBLY DRG.		



HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0058	HARWIN PLC UK TEL: 01705 370451 FAX: 01705 324010	HARWIN PTE SINGAPORE TEL: 05 7794909 FAX: 05 7793868	HARWIN CONNECTORS KOREA TEL: 822 521 0747 FAX: 822 521 0749
--	--	---	--

TOLERANCES
X = $\pm 1\text{mm}$
XX = $\pm 0.25\text{mm}$
XXX = $\pm 0.10\text{mm}$
X-XXX = $\pm 0.1\text{mm}$
ANGLES = $\pm 1^\circ$
UNLESS STATED

MATERIAL: SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE: DIL IC SOCKET OPEN FRAME

DRAWING NUMBER: D2XXX-01/D2XXX-21

SHT 2 OF 2