

## FEATURES AND SPECIFICATIONS

[查询"39421-0008"供应商](#)

### Take power to the max with the new EuroMax™ high-power pluggable terminal blocks

EuroMax terminal blocks are the highest amperage pluggable terminal blocks currently available on the market, offering up to 85.0A per circuit at 600V. Available in 2 to 10 circuits, with a wire range of 3 to 14 AWG, the EuroMax terminal blocks are an exciting addition to our popular 600V one-piece fixed high-power terminal blocks (Series 39910, 39920, 39950 and 39960). EuroMax terminal blocks provide an additional advantage of pluggability for easy servicing or field repair and replacement.

The two-piece pluggable connection system features a highly redundant parallel contact system to maximize performance. All hardware components are copper-based alloys to optimize thermal compatibility. The high-temperature housing material withstands lengthy solder pre-heat conditions. In addition, the header blade has 3 PCB tails, allowing for a robust connection to the PCB. A screw-driver slot is built-in on circuit

### Features and Benefits

- Rising-cage pressure-clamp termination compresses wires evenly, providing a secure contact without wire damage
- High-temperature housing material is able to withstand lengthy solder pre-heat conditions
- Pluggable design provides easy servicing or replacement of device in the field
- Stamped, one-piece terminals improve cost efficiency
- Header blade has 3 PCB tails, providing a robust connection to PCB

counts of 4 or higher to help ease de-plugging. Reliable, economically stamped, one-piece terminals offer cost efficiency. They are also available with mounting ends for added security.

EuroMax terminal blocks combine the benefits of high-power terminal blocks with the convenience of a pluggable design.




## 12.00mm (.472") Pitch EuroMax™ High-Power Pluggable Terminal Blocks

### 39421 Horizontal Plug

### 39422 Horizontal Plug With Mounting Ends

### 39425 Right-Angle Header

### 39426 Right-Angle Header With Mounting Ends

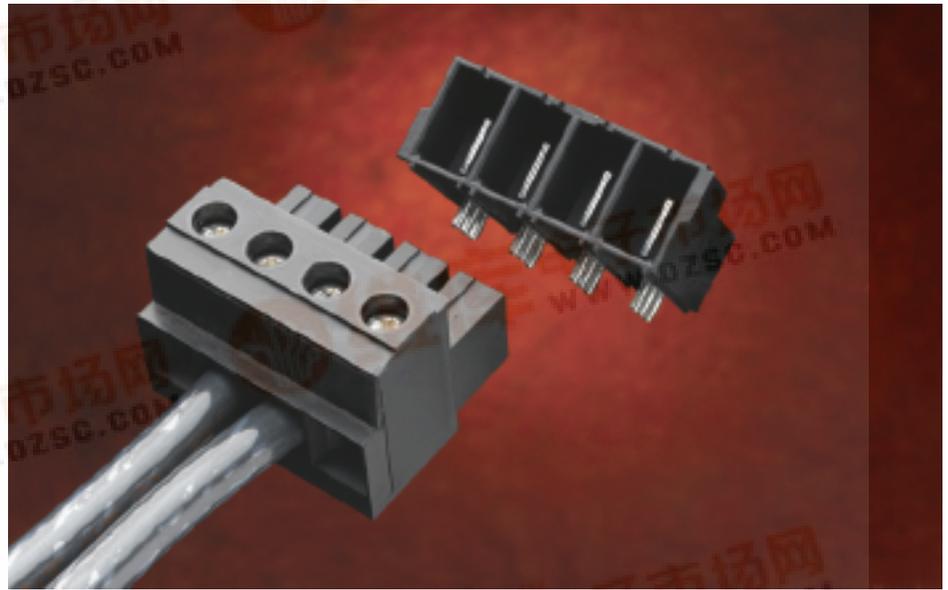

EuroMax Terminal Block without mounting ends

## SPECIFICATIONS

### Reference Information

Packaging: Box  
UL File No.: E48521  
Guide No.: XCFR2  
UL for Canada File No.: E48521  
Guide No.: XCFR8

### Electrical

Voltage: 600V  
Current: 85.0A  
Dielectric Withstanding Voltage: 8500V DC min.  
Insulation Resistance: 5,000 Megohms min.

### Mechanical

Wire Range: 3 to 14 AWG (21.20 to 2.08mm<sup>2</sup>)  
Strip Length: 16.00mm (.630 inch)  
Tightening Torque: 2.70Nm (24 in-lbs)  
Screwdriver: .25" Slotted, #2 Pozi

### Physical

Plugs:  
Housing: Polybutylene Terephthalate (PBT)  
Valox\* 420 SEO, Black  
Contact: Copper Alloy  
Contact Plating: Tin  
Screw: M5 Pan head, slotted, Silicon Bronze  
Screw Plating: Tin  
Pressure Clamp: Brass  
Pressure Clamp Plating: Nickel

Headers:  
Housing: Polyamide 6/6, Black  
Contact: Copper Alloy  
Contact Plating: Tin  
Operating Temperature: +130°C

\*Valox is a registered trademark of GE Plastics




APPLICATIONS

[查询"39421-0008"供应商](#)



12.00mm (.472") Pitch  
EuroMax™ High-Power  
Pluggable Terminal Blocks

- Motors and drives
- Power controls and converters
- Process controls
- Invertors
- Distributed power systems
- Cellular base stations
- Load control systems
- Solar power systems
- Fuel cells

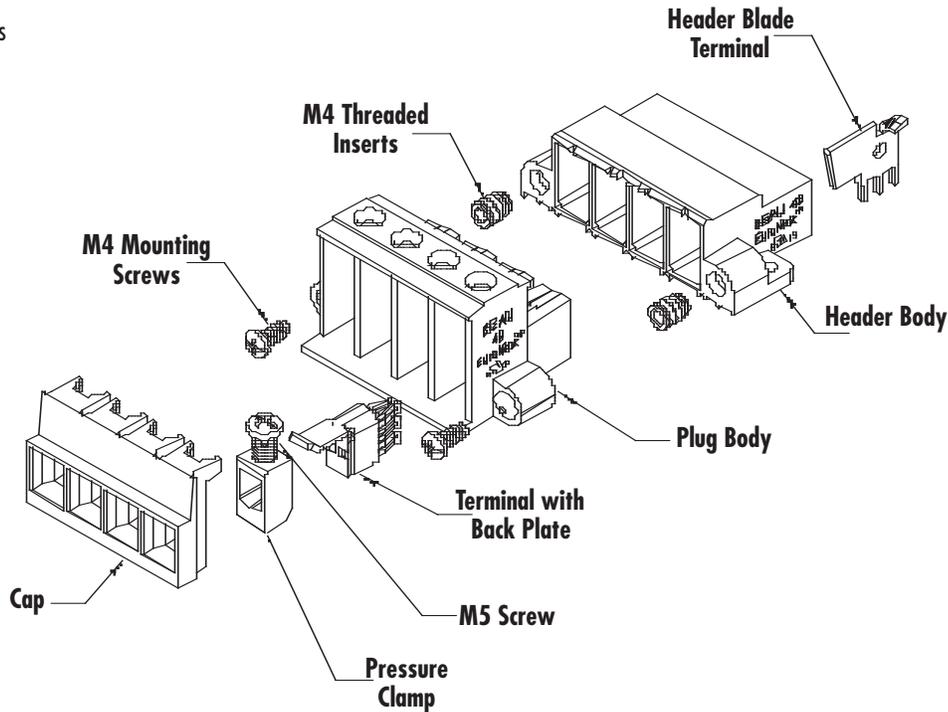


ORDERING INFORMATION


Circuits	Order No.			
	Horizontal Plug		Right-Angle Header	
	Without Mounting Ends	With Mounting Ends	Without Mounting Ends	With Mounting Ends
2	39421-0002	39422-0002	39425-0002	39426-0002
3	39421-0003	39422-0003	39425-0003	39426-0003
4	39421-0004	39422-0004	39425-0004	39426-0004
5	39421-0005	39422-0005	39425-0005	39426-0005
6	39421-0006	39422-0006	39425-0006	39426-0006
7	39421-0007	39422-0007	39425-0007	39426-0007
8	39421-0008	39422-0008	39425-0008	39426-0008
9	39421-0009	—	39425-0009	—
10	39421-0010	—	39425-0010	—




Horizontal Plug  
Series 39421



Horizontal Plug with Mounting Ends  
Series 39422



Right-Angle Header  
Series 39425



Right-Angle Header with Mounting Ends  
Series 39426

**Americas Headquarters**  
Lisle, Illinois 60532 U.S.A.  
1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**  
Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**  
Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
630-969-4550  
Fax:630-969-1352

Visit our Web site at <http://www.molex.com/product/tblocks/euromax.html>