



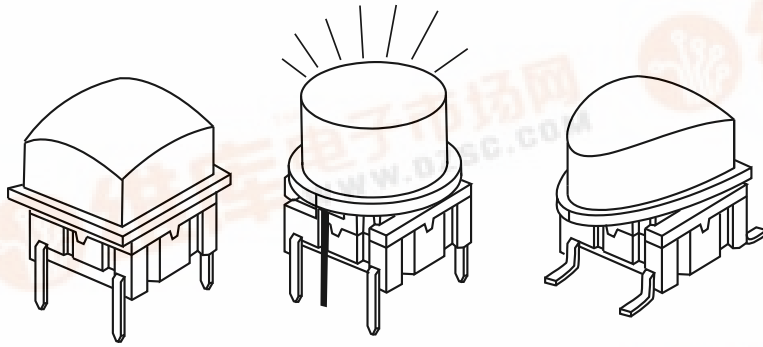


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+65°C
high temp: -40/+160°C


Dimensions (through-hole)

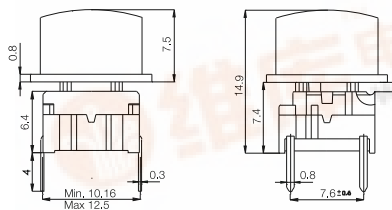


PCB layout

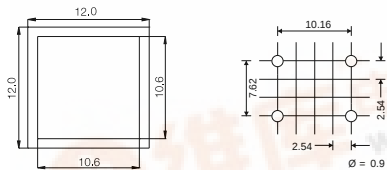


Dimensions (w/LED)

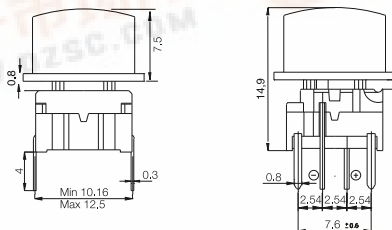


PCB layout (top view)

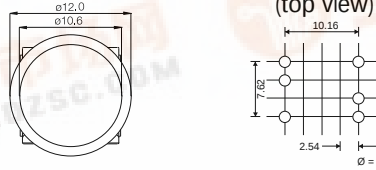

Dimensions (SMD)

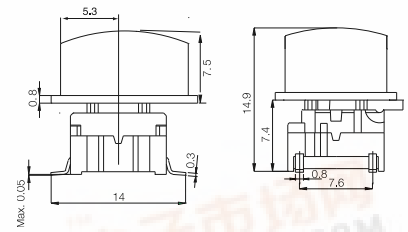

PCB layout

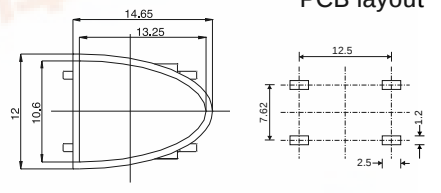

HOW TO ORDER

3 F +

Switch Mounting L 6 low temp.
 T through-hole H 9 high temp.

Standard versions:

3FTL6
 3FTH9
 3FSH9

Cap 1T

1U

1V

00 blue
 03 grey
 08 red
 09 black
 custom colours on request

3 F **T** +

Switch Mounting L 6 low temp.
 T through-hole H 9 high temp.

Standard versions:

3FTL622
 3FTL644
 3FTL688

Cap 1T

1U

1V

1 6
 transparent white

Combinations of high temperature switches with LED's will be limited by the temperature capability of the LED.

Ordering example: 3FTL644 + 1V16