

Fuseholder Open Design, 6.3 x 32 mm, THT

[查询 0031.8002 供应商](#)

250 VAC · 2.5W/10A16A (UL)

**Description**

- Through hole mounting


Approvals

- UL File Number: E39328

References[General Product Information](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)**Technical Data**

| | |
|------------------------------|---|
| Fuse-Link | 6.3 x 32mm |
| Mounting | PCB |
| Mounting | Screw or Rivet |
| Terminal | Solder THT |
| Rated Voltage | 250VAC |
| Rated Current | 16A (UL) |
| Rated Power Acceptance IEC | 2.5W / 10A @ Ta 23°C Admissible power acceptance at higher ambient temperature see derating curves |
| Degree of Protection | IP 00 |
| Protection Class | Suitable for appliances with protection class 1 or 2 acc. to IEC 61140 |
| Admissible Ambient Air Temp. | -40°C to 85°C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Terminals | Tin-Plated Copper Alloy |
| Unit Weight (Socket/Cap) | 7.23 g |
| Storage Conditions | 0°C to 60°C, max. 70% r.h. |
| Product Marking | Voltage, Current, Approvals |


| | |
|------------------------------|--|
| Soldering Methods | Wave |
| Solderability | 235°C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1 |
| Resistance to Soldering Heat | 260°C / 10sec acc. to IEC 60068-2-20, Test Tb, method 1A |
| Contact Resistance | < 5mΩ at 20 mV |
| Dielectric Strength | > 3kV between L-N (50Hz; 1 min) |
| Impulse Withstand Voltage | > 4kV between L-N |
| Insulation Resistance | > 10MΩ between L-N (500VDC; 1 min) |
| Overvoltage Category | I - III acc. to IEC 60664-1 |
| Pollution Degree | 1 - 3 acc. to IEC 60664-1 |

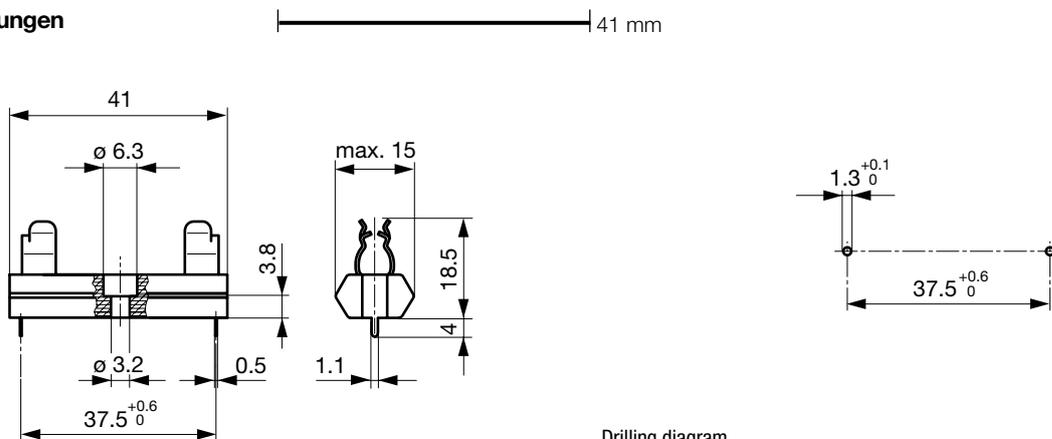Abmessungen

Drilling diagram

[查询"0031.8002"供应商](#)

Derating Curves for Fuseholders

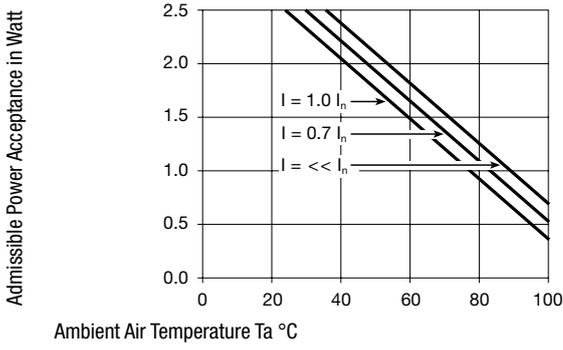

Variants

| Holder | Order Number |
|--------|--------------|
| ● | 0031.8002 |
| | 0853.9561 |
| | 0853.9562 |

Packaging Unit Bulk (100 pcs.)