

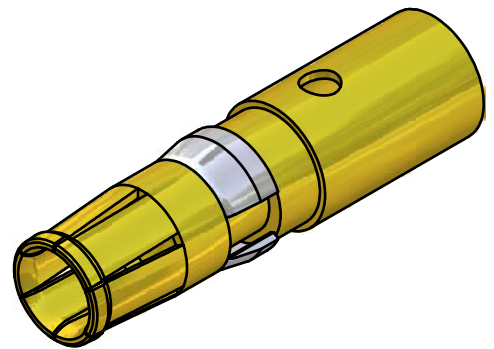
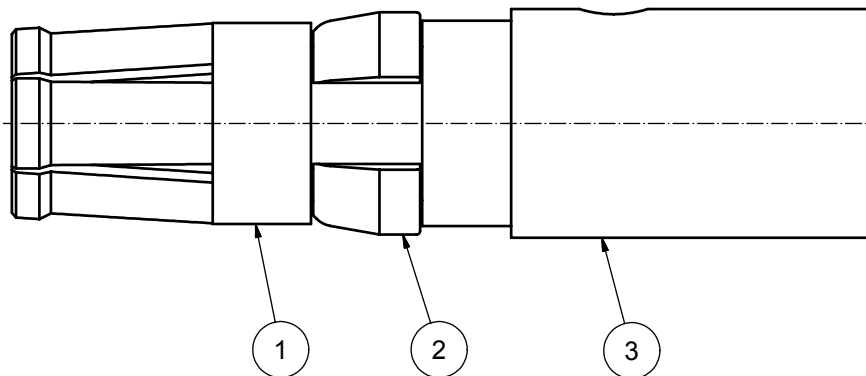


查询"13-000321"供应商

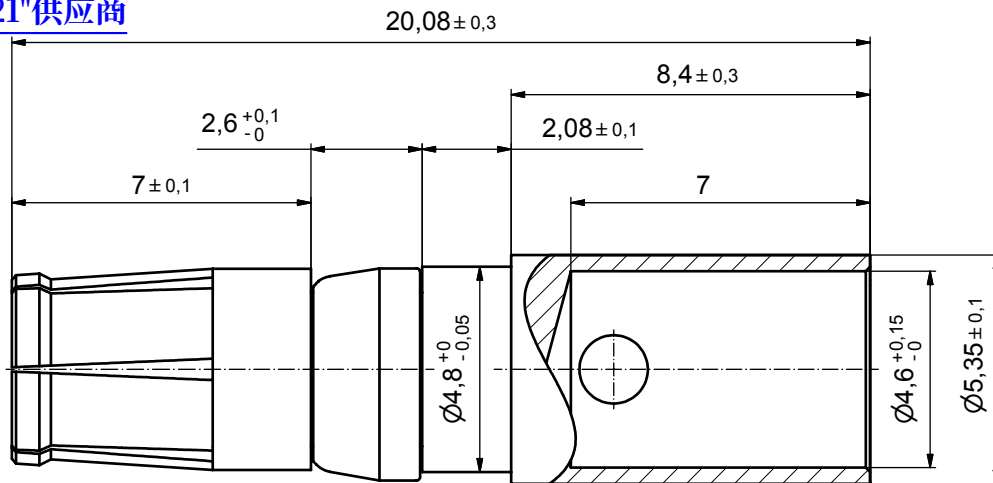

STRIPPING DIMENSIONS



Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

CRIMPING:
USE CRIMP TOOL: 360X10409X
WITH TOOL INSERT: 36-000060
SELECTOR SETTINGS: 5 FOR AWG 8
4 FOR AWG 10

3	1	REAR SIDE	COPPER ALLOY	min. 8µin HARD GOLD over min. 50µin NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
item	quantity	part description	material	plating

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										partlist	
										tolerance ISO 2768-m	
DO NOT ALTER CAD DRAWING BY HAND							date	name	title: HIGH POWER CONTACT FEMALE CRIMP VERSION 40A D-SUB COMBINATION		
						drawn	04.01.08	Schmidt			
						appd.	04.01.08	Koch			
						norm					
						d-old					
		a	Origin						dwg no: Inventor 10		DIN-A3
rev.	description	date	name			13K1A2378			sh: 1		
								part no: 13-000321			