

KR Electronics

General Description


KR 2709 is a 160 MHz surface mount bandpass filter. The filter has a minimum 1 dB bandwidth of 6 MHz. Other passband frequencies are available. Please consult the factory.

Features


- Surface Mount Package
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 10 nsec/div)

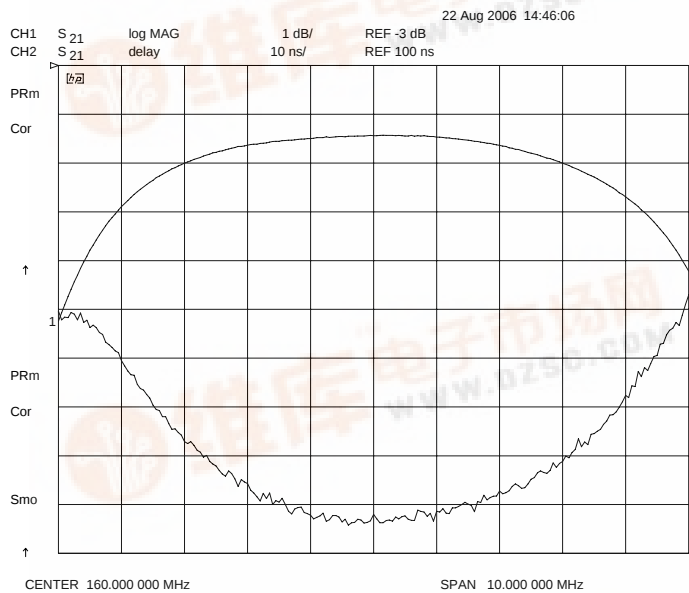

Overall Response (10 dB/div)

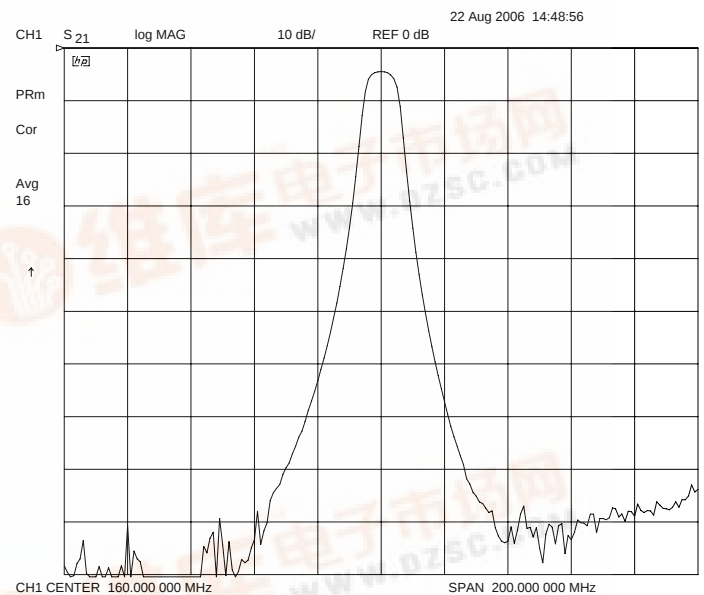

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982




KR Electronics 2709

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	160 MHz
Insertion Loss	< 6 dB (4.5 dB typical)
1 dB Bandwidth	6 MHz min
Attenuation at 148 MHz	30 dB min
Attenuation at 172 MHz	30 dB min
Source and Load	50 Ω

Physical Dimensions

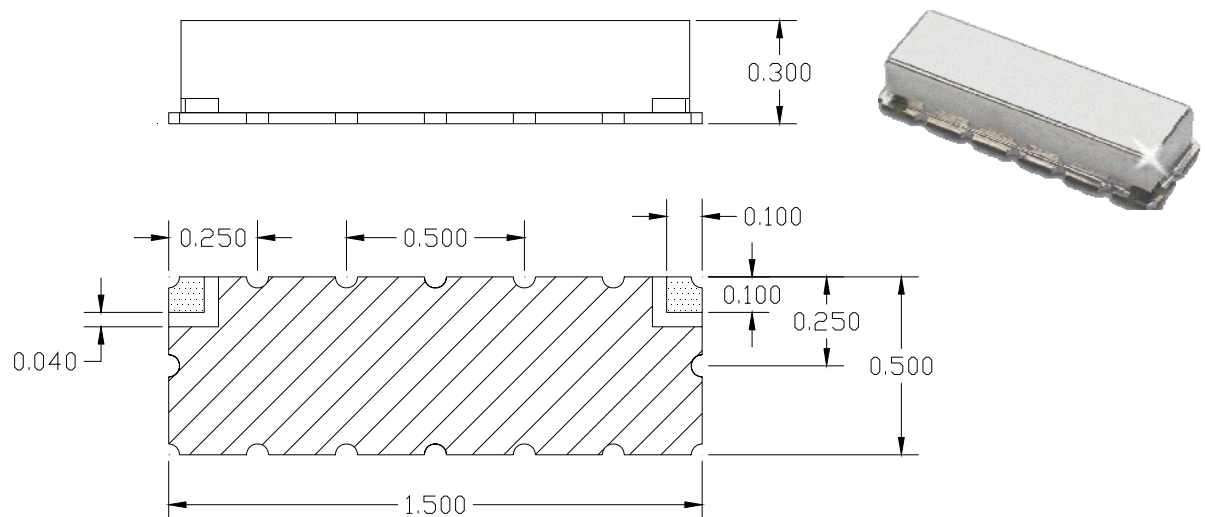

Notes:

1. Surface mount package — Metal cover, open frame
2. Dimensions in inches
3. Maximum reflow temperature 209° C for 10 seconds maximum
4. If boards are cleaned after installation, units must be completely dried