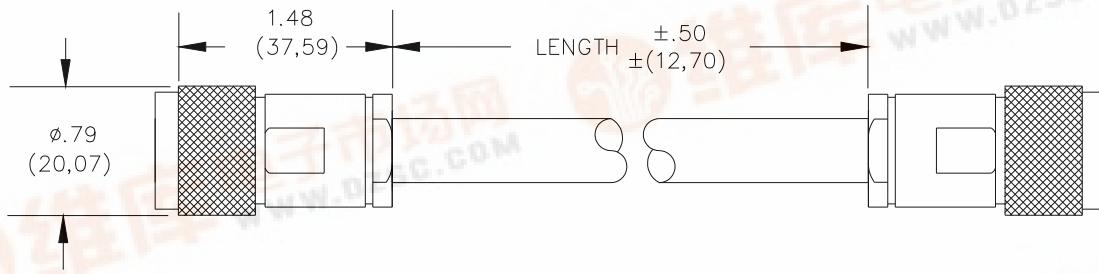


**Model 1658**  
**Cable Assembly Type "N" Male Both Ends****MATERIALS:**

Conn: 1<sup>st</sup> end – Type "N" Male, See table above.

Finish: Body and Fitting, Tarnish resistant.

Center contact: Gold plated per requirement of  
MIL-C-39012.

Nominal Impedance: 50 Ohms.

Cable: See table above. Marking: "POMONA  
1658-T-XX".

Conn: 2<sup>nd</sup> end – Same as first end.

**RATINGS:**

Operating Voltage: 1000 VRMS Max.

Operating Temperature: +89°C Max.

**ORDERING INFORMATION:** Model 1658-T-XX

XX = Cable Lengths, Standard Length: 18"  
(457), 24" (610), 36" (914), 48" (1219) & 60"  
(1542).

Additional lengths can be quoted upon request.

*Ordering Example: 1658-T-24 Indicates 24" in  
length*

Cable	
	<b>RG214/U (Double Shield)</b>
Model	1658-T-XX
Capacitance pf/ft	30.8
Nominal Impedance	50
Cable Diameter	Ø .425

**USA:** Sales: 800-490-2361 Technical Support: 800-241-  
2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),  
.xxx = ± .005" (.127 mm). All specifications are to the latest revisions.  
Specifications are subject to change without notice. Registered trademarks  
are the property of their respective companies.