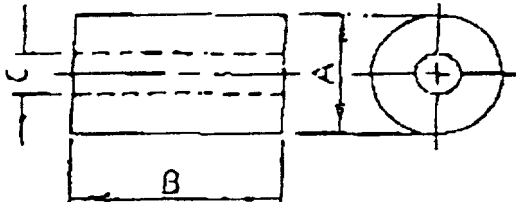


查询"33RH26X28.5X13"供应商

-559-570-

SPECIFICATION FOR APPROVAL

CUSTOMER : FARNELL				DATE : MAY 17, 1995	
PART NO. : 33RH 26X28.5X13(559-570)				DWG.NO. : RH-087	
(1) MECHANICAL ASSEMBLY 				A	26.0±0.5 mm
				B	28.5±0.6 mm
				C	12.9±0.4 mm
				D	mm
				E	mm
				F	mm
				G	mm
				H	mm
				I	mm
				1ST COLOR	
				4TH COLOR	
(2) ELECTRICAL REQUIREMENTS				(3) SCHEMATIC	
TEST FREQUENCY	MHZ	L	uH		
TEST FREQUENCY	MHZ	C	PF		
		Q			
		SRF	MHZ		
		RDC	OHM		
		IDC	mA		
TEST FREQUENCY	25 MHZ	Z	130 ⁻⁰ OHM		
TEST FREQUENCY	100 MHZ	Z	200 ⁻⁰ OHM		
(4) TEST INSTRUMENTS					
HP 4191A RF IMPEDANCE ANALYZER.					
MAT'L		SPEC.		APPROVED BY	
CORE				[Signature]	
WIRE		0.8¢ T.C.W. X 220 m/m		CHECKED BY	
WINDING		1/2 TS.		[Signature]	
				DRAWN BY	
				[Signature]	

查询"33RH26X28.5X13"供应商

TEST DATA FOR PREPRODUCTION SAMPLES

CUSTOMER : FARNELL						DATE : MAY 17, 1995	
PART NO. : 33RH 26X28.5X13 (559-570)						DWG. NO. : RH-087	
	MEAS. ITEM	Z (OHM)	Z (OHM)	A μ /m	B μ /m	C μ /m	D μ /m
SPEC	YOUR						
	SUGGEST	130 ⁻⁰	200 ⁻⁰	26 $\pm$ 0.5	28.5 $\pm$ 0.6	13 $\pm$ 0.4	
TEST FREQ.		25 MHZ	100 MHZ				
	1	167	274	26.08	28.51	13.22	
	2	165	275	26.11	28.57	13.21	
	3	162	272	26.23	28.55	13.11	
	4	162	274	26.06	28.60	13.10	
	5	163	275	26.11	28.44	13.10	
	6						
	7						
	8						
	9						
	10						
	11						
	12						
	13						
	14						
	15						
	$\bar{X}$	164	274	26.12	28.53	13.15	
	R	5	3	0.17	0.16	0.12	
OUR SAMPLE							
TEST CONDITION: TEMP. 23 °C R.H. 84 %						APPROVED BY 	
						CHECKED BY 	
						DRAWN BY 	