
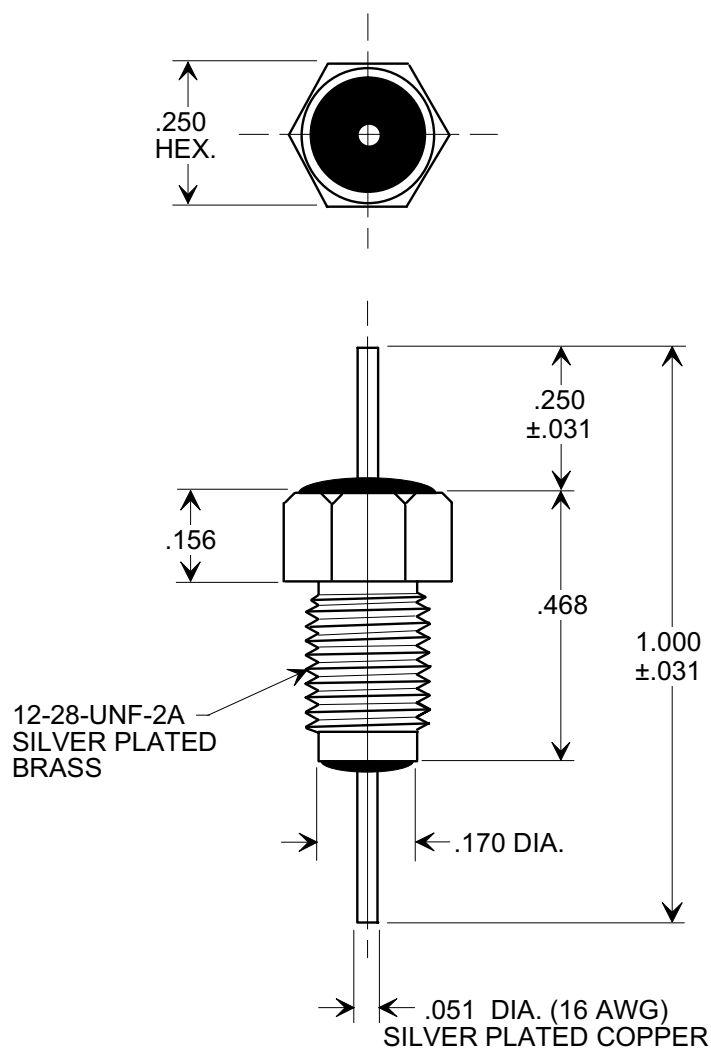



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

[查询"2499-003-X5U0-102P"供应商](#)



NOTE:
SUPPLIED WITH SILVER PLATED
HEX NUT AND INTERNAL TOOTH
LOCK WASHER

ORDERING INFORMATION

TUSONIX PART NO.	2499-003-X5U0-102P
STYLE NO.	2499-003
VALUE	1000 pF
VALUE TOL.	- 0% + 100%
TEMP. COEF.	X5U
RATING	500 WVDC
OPERATING RANGE	-55° TO +85°C
TO TUSONIX SPEC. UNLESS STATED OTHERWISE	

X-2015 Rev-0	REVISION RECORD	0	Original Release C.O. 20000508-4-01		--TOLERANCES-- Unless Otherwise Specified	Title BUSHING TYPE FEED-THRU CAPACITOR	
					DECIMAL ± .015		
					ANGLES ±	Drawn L.E. 05-09-00	Scale 3 X
					TUSONIX TUCSON, ARIZONA	Approved T.C. 05-09-00	
						A	2499-003-X5UO-102 P