

查询"374924B60024"供应商



Solder Anchor Attachment Method

Part Number: 374924B60024

(Vis Number: 037814)

This part is in stock and available for immediate delivery:

Contact your [local sales rep](#)

| BGA Surface | Interface | Heat Sink Finish | Part Class |
|-------------|-----------|------------------|------------|
| All | T766 | Black Anodize | A |

Features and Benefits

- New unique wire clip design allows for complete reworkability after assembly
- Configurations are available for a wide range of BGA package sizes in any thickness up to 3.0mm
- Minimal PC Board real estate is required for mounting
- Solder Anchors provide the most rugged mounting in the industry
- Each Heat Sink utilizes a phase change pad as the interface for optimal performance




Solder anchors are sold separately

Part Number Do57

2 Solder anchors must be soldered to the PCB Prior to attaching the heat sink clip.

| Width | Length | Height | Fin Thickness Across Width | Fin Thickness Across Length | Base Thickness | # of fins across width | # of fins across length |
|-------|--------|--------|----------------------------|-----------------------------|----------------|------------------------|-------------------------|
| 40mm | 40mm | 10mm | 0.9mm | 0.89mm | 1.5mm | 16 | 17 |

Mechanical Outline Drawing

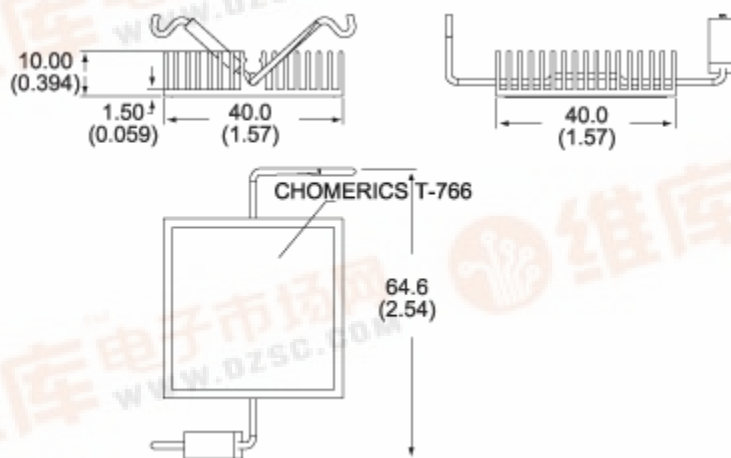


Unless otherwise shown, tolerances are $\pm 0.38 (\pm 0.015)$



[查询"374924B60024"供应商](#)


Recommended PCB Hole Pattern

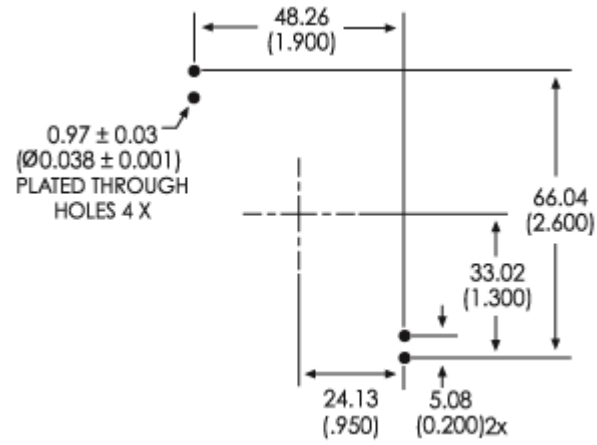

[查询"374924B60024"供应商](#)

Thermal Performance

| * θ_n | ** θ_f |
|--------------|---------------|
| 20.3 | 6.46 |

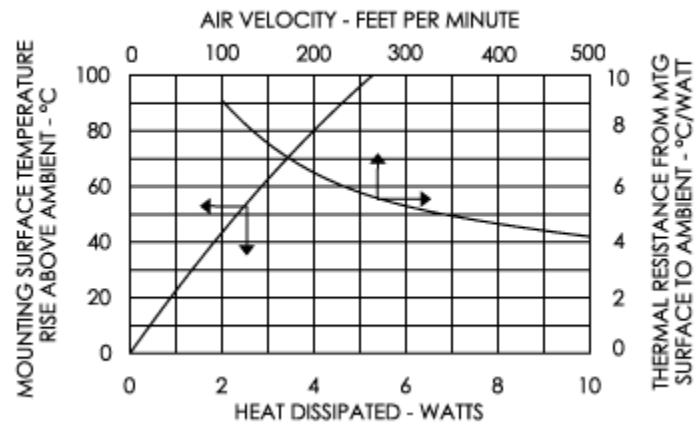

*Natural convection thermal resistance is based on a 75 °C heat sink temperature rise.

**Forced convection thermal resistance based on an entering 1.0 m/s (200 lfm) airflow.
Due to various heat dissipation paths within a BGA device, please test the heat sink in your application.

This data sheet represents only one of a broad range of products we make to cool electronics.
Our representatives can help you configure a complete cooling solution for your individual applications.

Visit us at www.aavidthermalloy.com • info@aavid.com • ©2002 Aavid Thermalloy, LLC