

62



620AS001 Strain Relief

Stainless Steel - Rotatable Coupling - Straight

STAINLESS STEEL

CONNECTOR DESIGNATOR

A

ROTATABLE COUPLING

620AS001 U 16



Basic Part No.

Finish

Z1 = Passivate

U = Black Cadmium

Shell Size

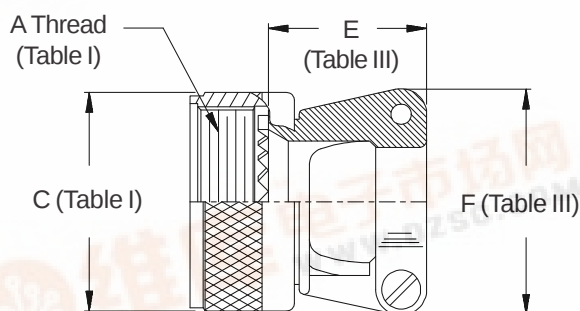

See inside back cover fold-out or page 14 for Table I.

TABLE III: CABLE ENTRY

Shell Size	E Nom	F Max	Cable Entry	
			Closed	Open
08	.555 (14.1)	.752 (19.1)	.125 (3.2)	.204 (5.2)
10	.665 (16.9)	.832 (21.1)	.187 (4.7)	.286 (7.3)
12	.790 (20.1)	.988 (25.1)	.291 (7.4)	.416 (10.6)
14	.790 (20.1)	1.046 (26.6)	.351 (8.9)	.476 (12.1)
16	.915 (23.2)	1.319 (33.5)	.501 (12.7)	.626 (15.9)
18	1.165 (29.6)	1.451 (36.9)	.518 (13.2)	.706 (17.9)
20	1.290 (32.8)	1.557 (39.5)	.581 (14.8)	.831 (21.1)
22	1.415 (35.9)	1.653 (42.0)	.644 (16.4)	.956 (24.3)
24	1.540 (39.1)	1.775 (45.1)	.706 (17.9)	1.081 (27.5)
28	1.690 (42.9)	2.020 (51.3)	.750 (19.1)	1.187 (30.1)
32	1.890 (48.0)	2.391 (60.7)	.875 (22.2)	1.250 (31.8)
36	2.270 (57.6)	2.496 (63.4)	.938 (23.8)	1.375 (34.9)

1. Cable Entry is defined as the accommodation entry for the wire bundle or cable. Dimensions are not intended for inspection criteria.
2. Metric dimensions (mm) are indicated in parentheses.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn